


# Typical Configuration of Noise Barrier and Portable Noise Enclosure


Minimum surface density of 14kg/m<sup>2</sup>

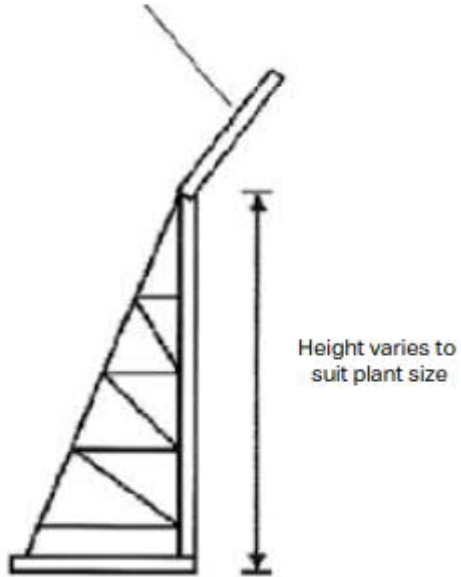

Typical Configuration of Noise Barrier (~3-5m high)

Lined with sound absorbent material at the inner surfaces

Minimum surface density of 14kg/m<sup>2</sup>

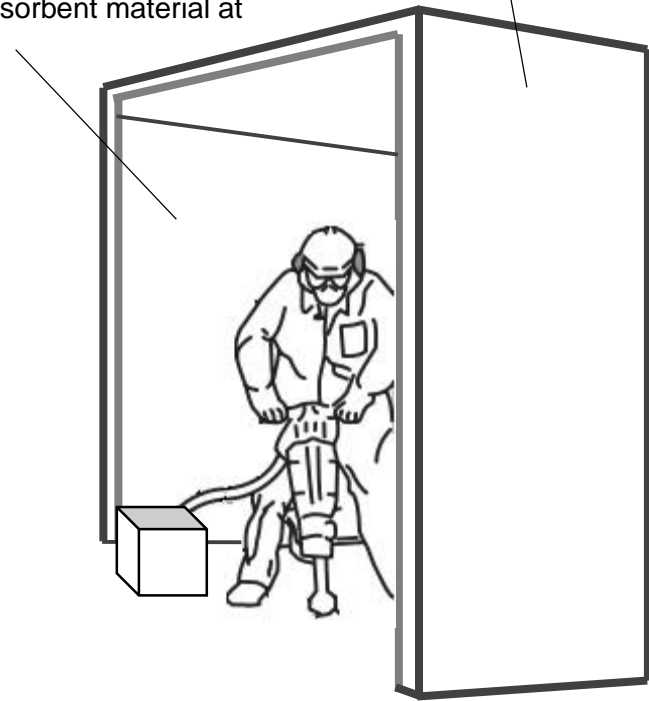

Typical Configuration of Portable Noise Enclosure (~2m high)