

Agreement No. CE 60/2017 (EP) Environmental Team for Tung Chung New Town Extension (East) – Design and Construction
Monthly Environmental Monitoring & Audit Report for July 2024

PREPARED FOR



Civil Engineering and Development Department

DATE 14 August 2024

REFERENCE 0445700



DOCUMENT DETAILS

| DOCUMENT TITLE | Agreement No. CE 60/2017 (EP) Environmental Team for Tung Chung New Town Extension (East) – Design and Construction |
|-------------------|--|
| DOCUMENT SUBTITLE | Monthly Environmental Monitoring & Audit Report for July 2024 |
| PROJECT NUMBER | 0445700 |
| Date | 14 August 2024 |
| Version | 01 |
| Author | KS |
| Client name | Civil Engineering and Development Department |

DOCUMENT HISTORY

| | | ERM APPRO | OVAL TO ISSUE | | | |
|---------|----------|-----------|---------------|------|------------|----------|
| VERSION | REVISION | AUTHOR | REVIEWED BY | NAME | DATE | COMMENTS |
| 1 | N/A | KS | RC | CAR | 08.14.2024 | N/A |
| | | | | | | |
| | | | | | | |



ERM CLIENT: Civil Engineering and Development Department PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01

SIGNATURE PAGE

Agreement No. CE 60/2017 (EP) Environmental Team for Tung Chung New Town Extension (East) – Design and Construction

Monthly Environmental Monitoring & Audit Report for July 2024

Craig Reid

Partner

ERM-Hong Kong, Limited 2507 One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T +852 2271 3000

© Copyright 2024 by The ERM International Group Limited and/or its affiliates ('ERM'). All Rights Reserved. No part of this work may be reproduced or transmitted in any form or by any means, without prior written permission of ERM.



CLIENT: Civil Engineering and Development Department
PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01



Tung Chung New Town Extension

Environmental Certification Sheet for Environmental Permit No. EP-519/2016

Reference Document/Plan

Document/Plan to be Certified: Monthly Environmental Monitoring & Audit Report for

July 2024 (Revision 1)

Date of Report: 14 August 2024

Reference EP Condition

Environmental Permit Condition: Condition 3.5

The Permit Holder shall submit 4 hard copies and 1 electronic copy of Monthly EM&A Reports for the construction stage of the Project to the Director, within 2 weeks after the end of the reporting month. The monthly EM&A Reports shall include an executive summary of all environmental audit results, together with actions taken in the event of non-compliance (exceedances) of the environmental quality performance limits (Action and Limit Levels), complaints received and emergency events relating to violation of environmental legislation (such as illegal dumping and landfilling). The submissions shall be certified by the ET Leader and verified by the IEC as having complied with the requirements as set out in the updated EM&A Manual before submission to the Director. Additional copies of the Monthly EM&A Reports shall be provided upon request by the Director.

ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced condition of ${\it EP-519/2016}$

felse.

Kelvin So

Environmental Team Leader

Date:

14 August 2024



Your Ref.

By Post

Our Ref. 198377-0879

Date 14 August 2024

Sustainable Lantau Office Civil Engineering and Development Department 13/F, North Point Government Offices 333 Java Road, North Point Hong Kong

Attention: Mr. Rafael TANG / Mr. K.T. WO

Dear Sir,

Agreement No. CE 59/2017 (EP) Independent Environmental Checker for Tung Chung New Town Extension – Investigation Monthly Environmental Monitoring & Audit Report for July 2024 for TCE

We refer to the Monthly Environmental Monitoring & Audit Report for July 2024 for Tung Chung New Town Extension (East) (TCE) dated August 2024 and certified by the Environmental Team (ET) Leader of TCE on 14 August 2024. Please note the submission is hereby verified, in accordance with the requirement stipulated in Condition 3.5 of EP-519/2016.

Should you have any query, please feel free to contact the undersigned at 2608 7314 (chuawo@binnies.com) or our Edward Lau at 3894 9695 (lauky@binnies.com).

Yours faithfully, for and on behalf of BINNIES HONG KONG LIMITED

MANUEL CHUA

INDEPENDENT ENVIRONMENTAL CHECKER

cc: ET Leader / TCE – ERM (Attn: Mr. Kelvin So) [by Email: <u>kelvin.so@erm.com</u>]
PM / TCE – AECOM (Attn: Mr. Chris Cheung) [by Email: <u>crec1@tce-aecom.com</u>]



Binnies Hong Kong Limited 43/F, AIA Kowloon Tower, 100 How Ming Street, Kwun Tong, Kowloon, Hong Kong 賓尼斯工程顧問有限公司 香港九龍觀塘巧明街 100 號友邦九龍大樓 43 樓











CONTENTS

| EXEC | CUTIVE SUMMARY | I |
|-------|--|---------------|
| BREA | ACHES OF ACTION AND LIMIT LEVELS FOR AIR QUALITY | II |
| BREA | CHES OF ACTION AND LIMIT LEVELS FOR NOISE | II |
| BREA | CHES OF ACTION AND LIMIT LEVELS FOR WATER QUALITY | II |
| ECO- | SHORELINE MONITORING | II |
| SOFT | SHORE ECOLOGICAL MONITORING | II |
| ENVI | RONMENTAL COMPLAINTS, NON-COMPLIANCE & SUMMONS | II |
| REPO | PRTING CHANGE | II |
| KEY I | ISSUES FOR THE COMING MONTH | II |
| 1. | INTRODUCTION | 1 |
| 1.1 | BACKGROUND | 1 |
| 1.2 | SCOPE OF THE EM&A REPORT | 2 |
| 1.3 | ORGANIZATION STRUCTURE | 2 |
| 1.4 | SUMMARY OF CONSTRUCTION WORKS | 4 |
| 1.5 | SUMMARY OF EM&A PROGRAMME REQUIREMENTS | 8 |
| 1.6 | STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL | PERMIT 10 |
| 1.7 | STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS | 10 |
| 2. | EM&A RESULTS FOR TUNG CHUNG EAST | 11 |
| 2.1 | AIR QUALITY | 11 |
| | 2.1.1 Monitoring Requirements and Equipment | 11 |
| | 2.1.2 Monitoring Schedule for the Reporting Month2.1.3 Results and Observations | 11 11 |
| 2.2 | NOISE MONITORING | 12 |
| | 2.2.1 Monitoring Requirements and Equipment | 12 |
| | 2.2.2 Monitoring Schedule for the Reporting Month | 13 |
| | 2.2.3 Results and Observations | 13 |
| 2.3 | WATER QUALITY MONITORING | 13 |
| 2.4 | COMPENSATION WOODLAND MONITORING | 13 |
| 2.5 | PRESERVED/TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE MONI | ITORING 14 |
| | 2.5.1 Preserved Plant Species of Conservation Importance | 14 |
| 2.6 | 2.5.2 Transplanted Plant Species of Conservation Importance ECO-SHORELINE MONITORING | 14 15 |
| 2.7 | SOFT SHORE ECOLOGICAL MONITORING | 15 |
| 2.8 | EM&A SITE INSPECTION | 15 |
| 2.9 | WASTE MANAGEMENT STATUS | 17 |
| 2.10 | LANDSCAPE AND VISUAL MONITORING | 18 |



| 2.11 | IMPLEM | ENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES | 21 |
|------|--------|---|----|
| 2.12 | | RY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL UTIONS | 21 |
| 3. | FUTUR | E KEY ISSUES | 22 |
| 3.1 | CONSTR | CUCTION PROGRAMME FOR THE COMING MONTH | 22 |
| 3.2 | MONITO | RING SCHEDULE FOR THE COMING MONTH | 27 |
| 4. | CONCL | USION AND RECOMMENDATION | 28 |
| ANNE | ≣X A | PROJECT ORGANISATION | |
| ANNE | EX B | ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE | |
| ANNE | EX C | STATUS OF SUBMISSIONS AND IMPLEMENTATION STATUS OF MITIGATION MEASURES UNDER EP | |
| ANNE | EX D | STATUS OF STATUTORY ENVIRONMENTAL REQUIREMENS | |
| ANNE | EX E | AIR QUALITY | |
| ANNE | EX E1 | CALIBRATION CERTIFICATES FOR AIR QUALITY | |
| ANNE | EX E2 | MONITORING SCHEDULE FOR AIR QUALITY | |
| ANNE | EX E3 | MONITORING RESULTS FOR AIR QUALITY | |
| ANNE | EX E4 | EVENT AND ACTION PLAN FOR AIR QUALITY | |
| ANNE | X F | NOISE | |
| ANNE | EX F1 | CALIBRATION CERTIFICATES FOR NOISE | |
| ANNE | EX F2 | MONITORING SCHEDULE FOR NOISE | |
| ANNE | EX F3 | MONITORING RESULTS FOR NOISE | |
| ANNE | X F4 | EVENT AND ACTION PLAN FOR NOISE | |
| ANNE | EX G | COMPENSATION WOODLAND MONITORING | |
| ANNE | EX H | PRESERVED/TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE MONITORING | Œ |
| ANNE | EX H1 | PRESERVED PLANT SPECIES OF CONSERVATION IMPORTANCE | |
| ANNE | EX H2 | TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE | |
| ANNE | ΞΧΙ | ECO-SHORELINE MONITORING | |
| ANNE | EX J | LANDSCAPE AND VISUAL MONITORING | |
| ANNE | EX J1 | EXAMPLES OF LANDSCAPE AND VISUAL MITIGATION MEASURES | |
| ANNE | EX J2 | EVENT AND ACTION PLAN FOR LANDSCAPE AND VISUAL MITIGATION MEASURES | |
| ANNE | ΞX K | CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS | , |
| ANNE | EX L | MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD | |



| LIST OF TAE | BLES | |
|-------------|--|----|
| TABLE 1.1 | CONTACT INFORMATION OF KEY PERSONNEL | 2 |
| TABLE 1.2 | MAJOR ACTIVITIES IN THE REPORTING PERIOD | 4 |
| TABLE 1.3 | SUMMARY OF STATUS FOR THE ENVIRONMENTAL ASPECTS UNDER THE UPDATED EM&A MANUAL | 8 |
| TABLE 2.1 | ACTION AND LIMIT LEVELS FOR 1-HOUR TSP | 11 |
| TABLE 2.2 | AIR QUALITY MONITORING DETAILS | 11 |
| TABLE 2.3 | SUMMARY OF 1-HOUR TSP MONITORING RESULTS IN THE REPORTING PERIOD | 12 |
| TABLE 2.4 | ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE | 12 |
| TABLE 2.5 | NOISE MONITORING DETAILS | 12 |
| TABLE 2.6 | SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS IN THE REPORTING PERIOD | 13 |
| TABLE 2.7 | KEY OBSERVATIONS IDENTIFIED DURING THE SITE INSPECTION IN THIS REPORTING MONTH | 16 |
| TABLE 2.8 | QUANTITIES OF DIFFERENT WASTE GENERATED AND IMPORTED FILL MATERIALS | 18 |
| TABLE 2.9 | IMPLEMENTATION STATUS OF LANDSCAPE AND VISUAL MITIGATION MEASURES | 19 |
| TABLE 2.10 | MONITORING PROGRAMME FOR LANDSCAPE AND VISUAL | 20 |
| TABLE 3.1 | MAJOR ACTIVITIES FOR THE NEXT REPORTING PERIOD | 23 |
| | | |

| LIST OF FIGU | RES |
|--------------|--|
| FIGURE 1.1 | LOCATION OF CONTRACT NO. NL/2017/03 - TUNG CHUNG NEW TOWN EXTENSION - RECLAMATION AND ADVANCE WORKS (CONTRACT 1) |
| FIGURE 1.2 | LOCATION OF CONTRACT NO. NL/2020/02 - TUNG CHUNG NEW TOWN EXTENSION - SALT WATER SUPPLY SYSTEM (CONTRACT 2) |
| FIGURE 1.3 | LOCATION OF CONTRACT NO. NL/2020/03 - TUNG CHUNG NEW TOWN EXTENSION - MAJOR INFRASTRUCTURE WORKS IN TUNG CHUNG EAST (CONTRACT 3) |
| FIGURE 1.4 | LOCATION OF CONTRACT NO. NL/2020/02 - TUNG CHUNG NEW TOWN EXTENSION - TAI HO INTERCHANGE (CONTRACT 7) |
| FIGURE 2.1 | CONSTRUCTION DUST MONITORING STATION LOCATION |
| FIGURE 2.2 | CONSTRUCTION AIRBORNE NOISE MONITORING STATION LOCATION |

ACRONYMS AND ABREVIATIONS

| Acronyms | Description |
|----------|--|
| C&D | Construction and Demolition |
| CAP | Contamination Assessment Plan |
| CEDD | Civil Engineering and Development Department |
| CWD | Chinese White Dolphin |
| DCM | Deep Cement Mixing |



| Acronyms | Description |
|---------------------|---|
| DO | Dissolved Oxygen |
| EIA | Environmental Impact Assessment |
| EIAO | Environmental Impact Assessment Ordinance |
| EIS | Ecologically Important Stream |
| EM&A | Environmental Monitoring and Audit |
| EP | Environmental Permit |
| EPD | Environmental Protection Department |
| ER | Engineer's Representative |
| ERM | ERM-Hong Kong, Limited |
| ET | Environmental Team |
| HVS | High Volume Sampler |
| IEC | Independent Environmental Checker |
| PDA | Planned Development Area |
| PME | Powered Mechanical Equipment |
| QPME | Quality Powered Mechanical Equipment |
| RAP | Remediation Action Plan |
| RR | Remediation Report |
| RTTM | Real Time Tracking and Monitoring |
| SS | Suspended Solid |
| ТСВ | Tung Chung Bay |
| TCE | Tung Chung East |
| TCNTE | Tung Chung New Town Extension |
| TCW | Tung Chung West |
| The Project | Tung Chung New Town Extension (East) |
| THW | Tai Ho Wan |
| TSP | Total Suspended Particulate |
| Updated EM&A Manual | Updated Environmental Monitoring and Audit Manual for Tung Chung New Town Extension prepared by ERM under Agreement No. CE 60/2017 (EP) and deposited to EPD under Environmental Permit No. EP-519/2016 |



EXECUTIVE SUMMARY

Tung Chung New Town Extension (TCNTE) is one of the major initiatives under the Government's multi-pronged approach to increase land supply to meet Hong Kong's mediumto long-term needs for housing, economic and social developments. The Environmental Impact Assessment (EIA) Report for TCNTE (Register No. AEIAR-196/2016) was approved on 8 April 2016 and the Environmental Permit (EP) No. EP-519/2016, covering the construction and operation of TCNTE, was granted on 9 August 2016. The EIA Report and EP cover both Tung Chung East (TCE) and Tung Chung West (TCW). ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction and operation of TCE Project ("the Project") in accordance with the requirements specified in the EP, Updated Environmental Monitoring and Audit (EM&A) Manual, EIA Report of the TCNTE project and other relevant statutory requirements.

The construction of the Contract No. NL/2017/03 - Tung Chung New Town Extension – Reclamation and Advance Works ("Contract 1") at TCE commenced on 9 July 2018.

The construction of the Contract No. NL/2020/02 - Tung Chung New Town Extension – Salt Water Supply System ("Contract 2") at TCE commenced on 4 September 2021.

The construction of the Contract No. NL/2020/03 - Tung Chung New Town Extension – Major Infrastructure Works in Tung Chung East ("Contract 3") at TCE commenced on 5 November 2021.

The construction of the Contract No. NL/2020/07 - Tung Chung New Town Extension – Tai Ho Interchange ("Contract 7") at TCE commenced on 15 March 2022.

This is the Monthly EM&A report presenting the EM&A works carried out during the period from 1 to 31 July 2024 for the TCE Project in accordance with the Updated EM&A Manual.

A summary of monitoring and audit activities conducted in the reporting period is listed below:

| Air Quality Mon | 5 sessions | |
|-----------------|------------------------|------------|
| Noise Monitorin | 5 sessions | |
| Preserved Plant | : Species Monitoring | 1 session |
| Transplanted Pl | ant Species Monitoring | 1 session |
| Environmental | Site Inspection | |
| • Contract 1 | | 3 sessions |
| • Contract 2 | | 5 sessions |
| • Contract 3 | | 4 sessions |
| • Contract 7 | | 5 sessions |
| Environmental | Management Meeting | |
| • Contract 1 | | 1 session |
| • Contract 2 | | 1 session |
| • Contract 3 | | 1 session |
| • Contract 7 | | 1 session |



Environmental auditing works, including weekly site inspections of construction works conducted by the ET, audit of implementation of Complaint Management Plan, Eco-shoreline Implementation Plan, Detailed Preservation and/or Translocation of Plant Species of Conservation Importance, Detailed Compensatory Woodland Planting Plan and Waste Management Plan were conducted in the reporting period. Based on the audit results and the observation for the reporting period, environmental pollution control and mitigation measures for the Project were properly implemented.

BREACHES OF ACTION AND LIMIT LEVELS FOR AIR QUALITY

No exceedance of Action and Limit Levels was recorded for construction air quality monitoring in the reporting period.

BREACHES OF ACTION AND LIMIT LEVELS FOR NOISE

No exceedance of Action/Limit Levels was recorded for construction noise monitoring in the reporting period.

BREACHES OF ACTION AND LIMIT LEVELS FOR WATER QUALITY

Water quality monitoring was suspended in the reporting period.

ECO-SHORELINE MONITORING

The construction of vertical eco-shoreline, mangrove eco-shoreline and rocky eco-shoreline has been substantially completed. Wet season monitoring was conducted during the reporting period.

SOFT SHORE ECOLOGICAL MONITORING

No post-construction soft shore ecological monitoring at Tung Chung Bay and Tai Ho Wan was scheduled during the reporting period.

ENVIRONMENTAL COMPLAINTS, NON-COMPLIANCE & SUMMONS

There was no notification of summons or prosecution recorded in the reporting period.

One (1) environmental complaint related to Contract 3 was received in the reporting period. Investigation was conducted for the environmental complaint in accordance with the complaint handling process as stated in the Complaint Management Plan.

REPORTING CHANGE

There was no reporting change in the reporting period.

KEY ISSUES FOR THE COMING MONTH

Potential environmental impacts arising from the upcoming construction activities in the next reporting period of August 2024 are mainly associated with dust emission, noise from plant operation during normal working hours and restricted hours, handling and storage of C&D materials generated from construction activities, efficiency of wastewater and drainage management and tree protection. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary



mitigation measures. The ET will also recommend to the Contractor about the environmental toolbox topics on the abovementioned key issues for the coming month.



CLIENT: Civil Engineering and Development Department
PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01

INTRODUCTION

1.1 BACKGROUND

Tung Chung New Town Extension (TCNTE) is one of the major initiatives under the Government's multi-pronged approach to increase land supply to meet Hong Kong's mediumto long-term needs for housing, economic and social developments. The Environmental Impact Assessment (EIA) Report for TCNTE (Register No. AEIAR-196/2016) was approved on 8 April 2016 and the Environmental Permit (EP) No. EP-519/2016, covering the construction and operation of TCNTE, was granted on 9 August 2016. The EIA Report and EP cover both Tung Chung East (TCE) and Tung Chung West (TCW).

ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction and operation of TCE Project ("the Project") in accordance with the requirements specified in the EP, Updated Environmental Monitoring and Audit (EM&A) Manual (1), EIA Report of the TCNTE project (2) and other relevant statutory requirements.

The TCNTE comprises the following elements:

(a) TCE Project

- 1. Reclamation of the seabed by a non-dredged method at TCE to form a total of about 130 hectares of land;
- 2. Construction of about 4.9 kilometers of seawalls, with an eco-shoreline, three drainage box culvert outfalls, three circulation drains and a seawater intake at TCE;
- 3. Provision of infrastructure for Tung Chung Area 58, including construction of a single two-lane road with a footpath and the associated utility works;
- 4. Construction of proposed open space;
- 5. Construction of roads, footpaths, cycle tracks and the associated junction / road improvement works;
- 6. Engineering infrastructure works covering drainage, sewerage, waterworks (including a fresh water service reservoir, a salt water service reservoir and a salt water pumping station), common utility tunnels and landscaping works; and
- 7. Implementation of environmental mitigation measures and environmental monitoring and audit programme for the works.

(b) TCW Project

- 1. Site formation works at TCW;
- 2. Construction of proposed open space;
- 3. Construction of the River Park including a visitor centre at TCW; and
- 4. Construction of sustainable urban drainage systems at TCW.

⁽²⁾ Arup (2015). Environmental Impact Assessment Report for Tung Chung New Town Extension. Deposited to EPD under Register No. AEIAR-196/2016



CLIENT: Civil Engineering and Development Department
PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01

⁽¹⁾ ERM (2018a). Updated Environmental Monitoring and Audit Manual for Tung Chung New Town Extension. Deposited to EPD under EP-519/2016

The locations of Contracts 1, 2, 3 and 7 are shown in *Figure 1.1 to 1.4*. The construction and the reclamation related marine works of Contract 1 commenced on 9 and 13 July 2018, respectively. The construction of Contracts 2, 3 and 7 commenced on 4 September 2021, 5 November 2021 and 15 March 2022, respectively.

1.2 SCOPE OF THE EM&A REPORT

This is the Monthly EM&A Report for the TCE Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 31 July 2024 for the construction works.

1.3 ORGANIZATION STRUCTURE

The organization structure of the Project is shown in *Annex A*. The key personnel contact names and contact details are summarized in *Table 1.1* below.

TABLE 1.1 CONTACT INFORMATION OF KEY PERSONNEL

| Party | Position | Name | Telephone | | |
|---|----------------------------------|--------------------|------------|--|--|
| Environmental Team (ET) | ET Leader | Kelvin So | 3894 9504 | | |
| (ERM-Hong Kong, Limited) | Deputy ET Leader | Raymond Chow | 2271 3281 | | |
| Independent Environmental | IEC | Manuel Chua | 3894 9807 | | |
| Checker (IEC) (Binnies Hong Kong Limited) | Deputy IEC | Edward Lau | 3894 9695 | | |
| Contract No. NL/2017/03 - Works (Contract 1) | Tung Chung New Town Extension | on – Reclamation a | nd Advance | | |
| Civil Engineering and Development Department | Marine Conservation Officer | Wo King Tai | 3894 9707 | | |
| Engineer's Representative | Principal Resident Engineer | Frankie Fan | 3894 9603 | | |
| (ER) (AECOM Asia Company | Chief Resident Engineer | Chris Cheung | 3894 9604 | | |
| Limited) | Resident Engineer | Victor Chan | 3894 9666 | | |
| | Inspector of Works | Clement Fan | 3894 9798 | | |
| Contractor | Site Agent | David Wong | 9653 8635 | | |
| (Build King – SCT Joint Venture) | Civil Division Head | Marco Chan | 9257 7033 | | |
| venture) | Environmental Officer | Issac Wong | 9873 8968 | | |
| | 24-hour Complaint Hotline | - | 5976 1853 | | |
| Contract No. NL/2020/02 - Tung Chung New Town Extension - Salt Water Supply System (Contract 2) | | | | | |
| Civil Engineering and | Senior Engineer | Patrick C Y Yeung | 2231 4435 | | |
| Development Department | Electrical & Mechanical Engineer | Samson K L Yip | 2231 4460 | | |
| Engineer's Representative | Principal Resident Engineer | Frankie Fan | 3894 9603 | | |
| (ER) | Senior Resident Engineer | Sunny Ng | 3894 9605 | | |
| (AECOM Asia Company Limited) | Senior Resident Engineer | Vincent Leung | 3894 9645 | | |
| , | Resident Engineer | Amen Fung | 3894 9676 | | |
| | Senior Inspector of Works | Wong Ting Yu | 3894 9706 | | |
| Contractor | Construction Manager | Ambrose Kwong | 6198 7787 | | |
| (China Geo-Engineering Corporation) | Site Agent | Edward Mok | 6498 4306 | | |
| Corporation) | Construction Team Leader | C K Chung | 5401 5720 | | |
| | Environmental Officer | Fung Ka Bao | 9120 1489 | | |



| Party | Position | Name | Telephone |
|---------------------------------|-----------------------------|-----------------------|-----------|
| | 24-hour Complaint Hotline | - | 5976 1853 |
| | Tung Chung New Town Exten | sion – Major Infrastr | ucture |
| Works in Tung Chung East | (Contract 3) | | |
| Civil Engineering and | Senior Engineer | Eddie W C Lam | 2231 4445 |
| Development Department | Senior Engineer | Phoebe Tang | 2231 4423 |
| | Engineer | Timothy H M Chan | 2231 4473 |
| | Engineer | Colin K C Wong | 2231 4417 |
| | Engineer | Wing Chen | 3894 9704 |
| Engineer's Representative | Principal Resident Engineer | Frankie Fan | 3894 9603 |
| (ER) (AECOM Asia Company | Chief Resident Engineer | Gloria Tang | 3894 9639 |
| Limited) | Senior Resident Engineer | Winston Wong | 3894 9650 |
| | Resident Engineer | David Li | 3894 9684 |
| | Resident Engineer | Alvis Li | 3894 9558 |
| | Resident Engineer | Anson Yip | 3894 9559 |
| | Senior Inspector of Works | Douglas Ng | 3894 9737 |
| Contractor | Construction Manager | Cheung Siu Lun | 2272 3680 |
| (Build King Civil Engineering | Site Agent | Paul Lui | 9095 7922 |
| Limited) | Deputy Site Agent | Aldous Lo | 9225 0368 |
| | Construction Team Leader | Ken Yau | 9197 2219 |
| | Environmental Officer | Tim Lin | 6390 0018 |
| | 24-hour Complaint Hotline | - | 5976 1853 |
| Contract No. NL/2020/07 - | Tung Chung New Town Exten | sion – Tai Ho Interch | ange |
| (Contract 7) | | | |
| Civil Engineering and | Senior Engineer | Phoebe Tang | 2231 4423 |
| Development Department | Engineer | S H Leung | 2231 4449 |
| Engineer's Representative | Principal Resident Engineer | Frankie Fan | 3894 9603 |
| (ER) | Senior Resident Engineer | Kelvin Kwan | 3894 9641 |
| (AECOM Asia Company Limited) | Senior Resident Engineer | Brian Li | 3894 9556 |
| | Resident Engineer | Kingsley Ho | 3894 9552 |
| | Resident Engineer | Jessie Tang | 3894 9678 |
| | Senior Inspector of Works | C K Liu | 3894 9733 |
| Contractor | Site Agent | Hon Yee | 9090 3109 |
| (Build King Civil Engineering | Deputy Site Agent | Vincent Kwan | 9833 1313 |
| Limited) | Construction Team Leader | Vincent Lo | 9883 9229 |
| | Environmental Officer | Nash Wong | 9810 1946 |
| | 24-hour Complaint Hotline | - | 5976 1853 |



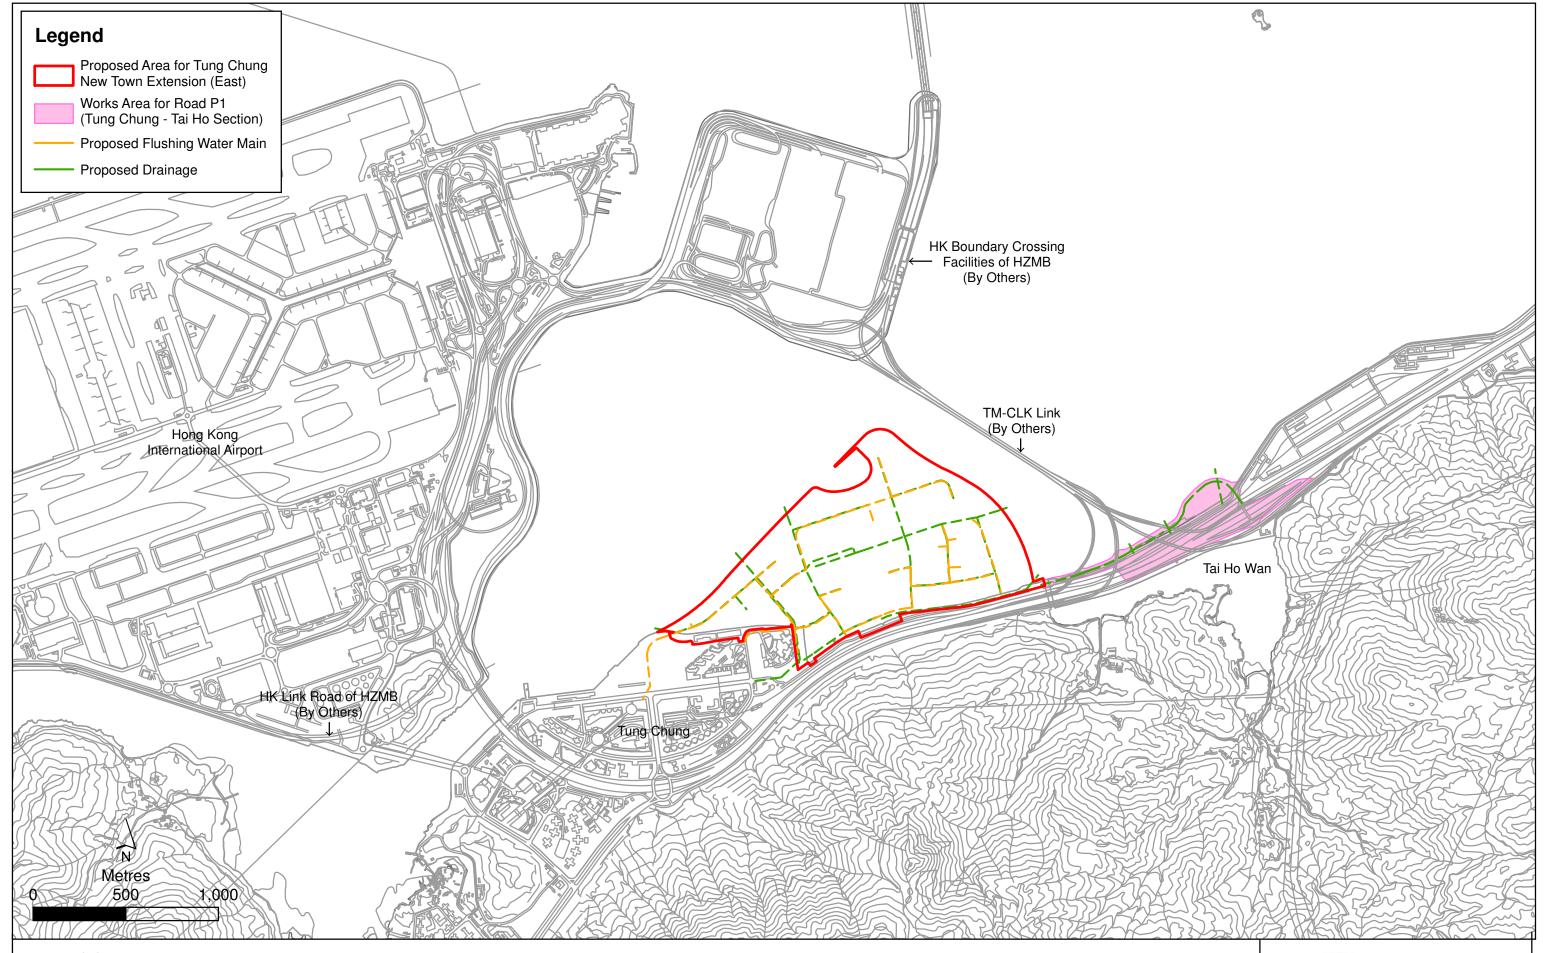


Figure 1.1 Location of Contract No. NL/2017/03 - Tung Chung New Town Extension - Reclamation and Advance Works (Contract 1)



File: T:\GIS\CONTRACT\0445700\mxd\0445700_Infrastructure_Works.mxd Date: 11/10/2018

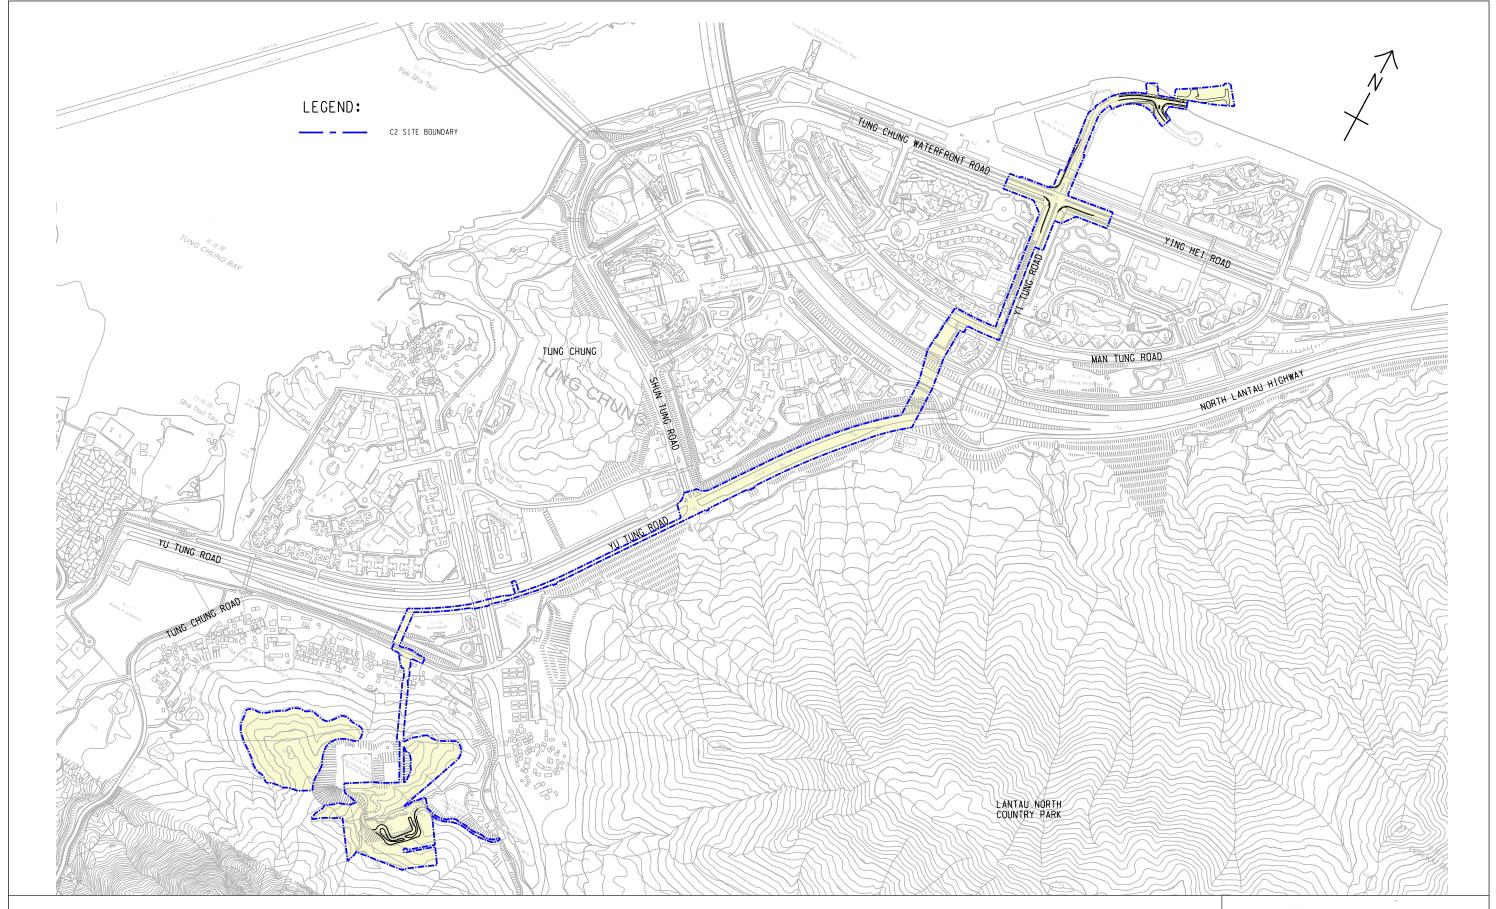


Figure 1.2 Location of Contract No. NL/2020/02 - Tung Chung New Town Extension – Salt Water Supply System (Contract 2)



FILE: 0445700i.cdr DATE: 13/09/2021

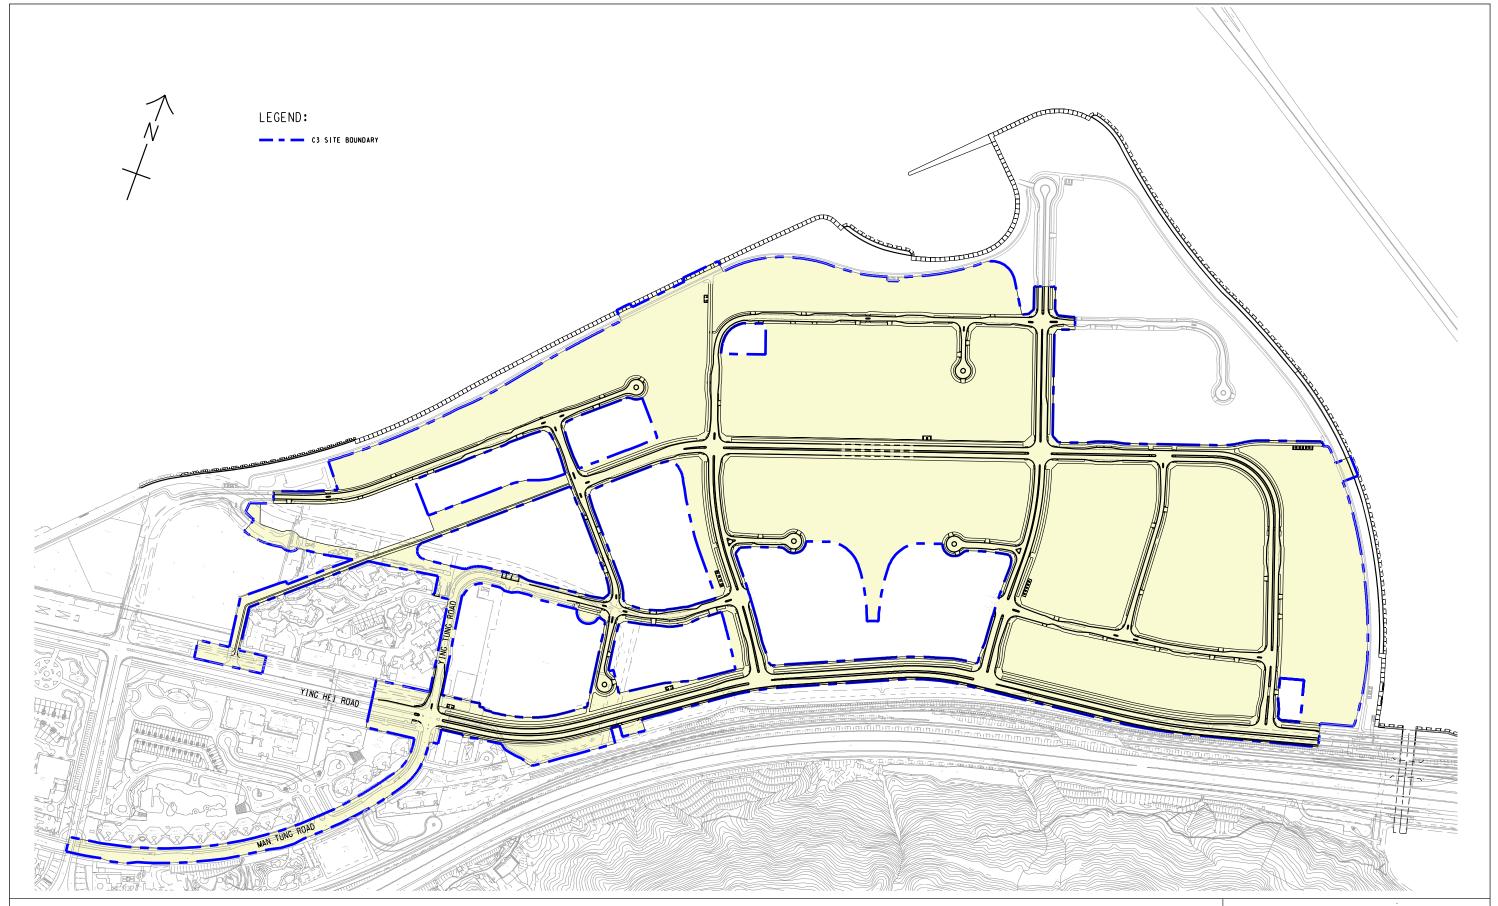


Figure 1.3 Location of Contract No. NL/2020/03 - Tung Chung New Town Extension – Major Infrastructure Works in Tung Chung East (Contract 3)



FILE: 0445700j.cdr DATE: 09/08/2021

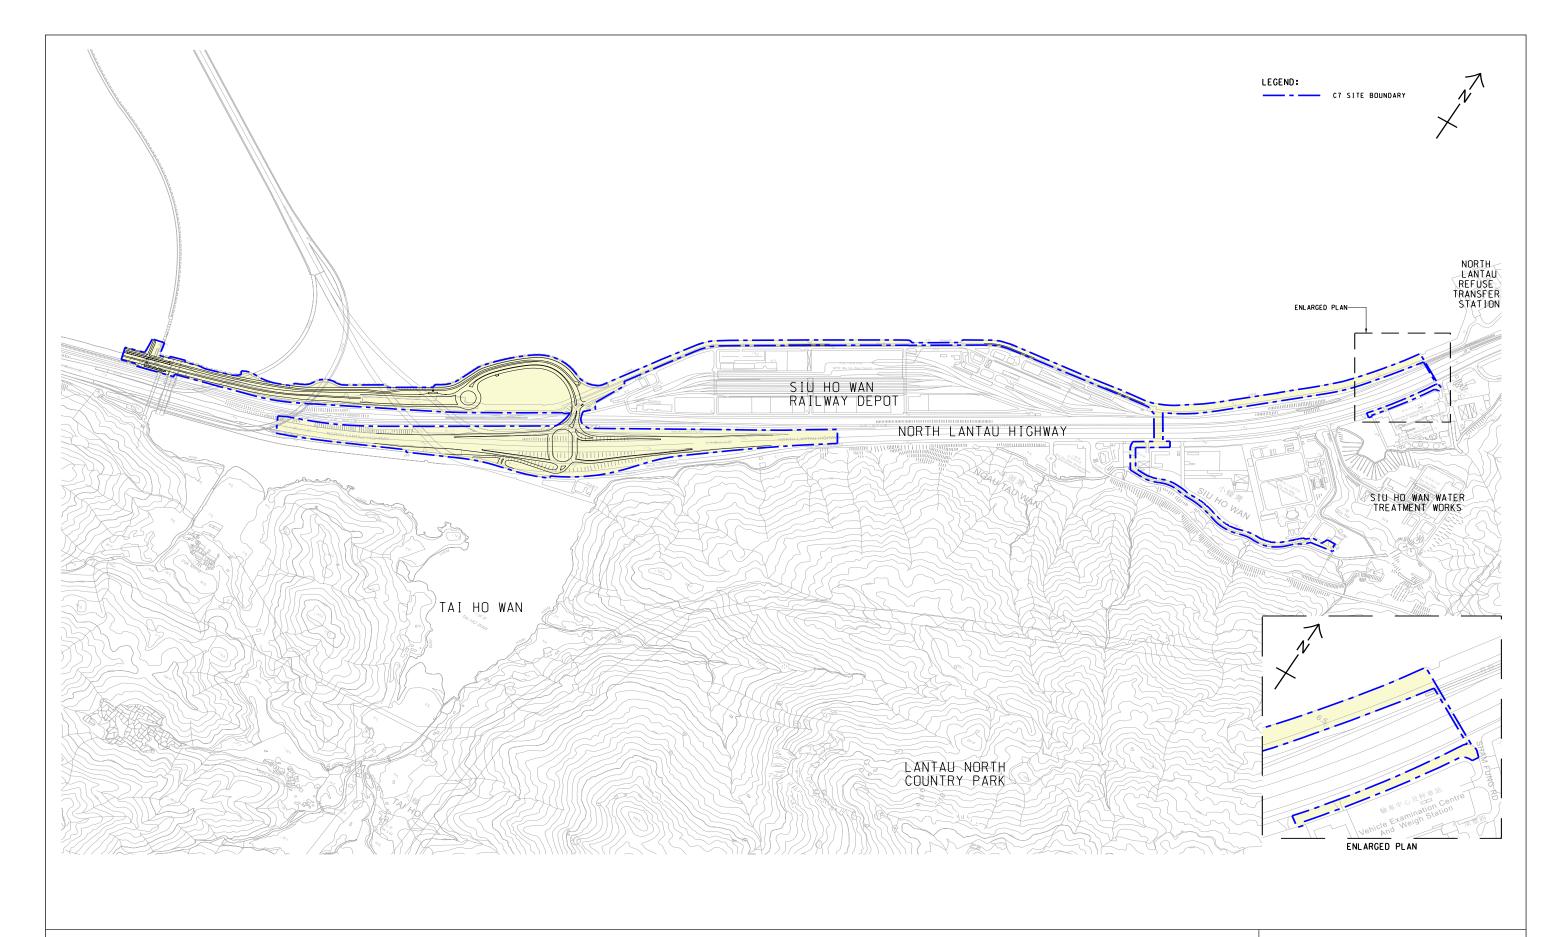


Figure 1.4 Location of Contract No. NL/2020/07 – Tung Chung New Town Extension – Tai Ho Interchange (Contract 7)



FILE: 0445700 DATE: 8/11/2021

1.4 SUMMARY OF CONSTRUCTION WORKS

As informed by the Contractor, details of the major works carried out in this reporting period are listed below:

TABLE 1.2 MAJOR ACTIVITIES IN THE REPORTING PERIOD

| Activities | Key Issues | Key Mitigation Measures | | |
|--|--|---|--|--|
| Contract No. NL/2017/03 - Tung Chung New Town Extension – Reclamation and Advance Works (Contract 1) | | | | |
| Land-based Works | | | | |
| Removal of siltation at IORC Installation of security gate and fence at Seawater Intake | Dust emission Handling and storage of C&D materials generated from construction activities Noise from plant operation Emission of dark smoke from PMEs Efficiency of wastewater and drainage management Potential surface runoff Noise from plant operation during normal working hours or restricted hours Dust emission during storage and transfer of sand/ sorted public fill | Good site practices Regular water spraying on stockpiles, unpaved haul road and land filling area Provide tarpaulin sheets coverage on stockpiles Sorting and reuse of C&D materials as far as practicable Use of QPME and noise barrier/acoustic mat Regular maintenance of PMEs Implementation of wastewater and drainage management Strictly follow requirement under CNP for the use of PMEs and works within restricted period Use of acoustic mat and other noise mitigation measures when necessary Regular maintenance of engines and mechanical equipment | | |
| Contract No. NL/2020/02 - Tung Chung New 1 | Town Extension – Salt Water Supply System (| Contract 2) | | |

Land-based Works

- Construction of pumping station at Portion 6
- Construction of Intake Culvert at Portion 6
- Construction of service reservoir, TMF mainlaying at Portion 3
- · Dust emission
- Handling and storage of C&D materials generated from construction activities
- Noise from plant operation
- Emission of dark smoke from PMEs

- Good site practices
- Regular water spraying on stockpiles, unpaved haul road and land filling area
- Provide tarpaulin sheets coverage on stockpiles



| tivities | Key Issues | Key Mitigation Measures | | |
|---|---|--|--|--|
| CLP cable duct laying works at Wong Lung Hang at Portion 3 Watermain laying works at Portion 3 along Man Tung Road, Yu Tung Road Planter, Tung Chung Road and inside WSD facilities Watermain laying works at Yi Tung Road at Portion 4 Manhole construction and pipe laying for drainage works at Portion 5A Construction of T-Junction in Yi Tung Road at Portion 5 | Efficiency of wastewater and drainage management Tree protection | Sorting and reuse of C&D materials as far as practicable Use of QPME and noise barrier/acoustic materials as far as practicable Regular maintenance of PMEs Implementation of wastewater and drainage management Retain and protect all existing trees and vegetation within the study area which are not directly affected by the works | | |
| Contract No. NL/2020/03 - Tung Chung New Town Extension - Major Infrastructure Works in Tung Chung East (Contract 3) | | | | |
| ntract No. NL/2020/03 - Tung Chung New Tov | wn Extension – Major Infrastructure Works | Ī | | |

Excavation and ELS works at Portion 104

- Excavation and ELS works at CUT no.1, 2, 3, 4 and supporting building
- Construction works for CUT no. 1 structure
- Back-filling works for CUT 2
- Construction works and furniture installation of PM office at WA9
- Construction works of Contractor office at WA6
- Drainage, Sewerage and watermain works at Road L4, L3, L5 and Portion 16
- DCS works at Road L4 and L3.
- Pipe laying works for twin rising mains/ watermain laying at Man Tung Road
- Preparation and pipe jacking works at Ying Tung Road
- Pipe jacking works at Yi Tung Road
- Foundation and backfilling works for noise barrier at Portion 11
- Road and drainage works in Road P1

- · Dust emission
- Handling and storage of C&D materials generated from construction activities
- Noise from plant operation
- Emission of dark smoke from PMEs
- Efficiency of wastewater and drainage management

- · Good site practices
- Regular water spraying on stockpiles, unpaved haul road and land filling area
- Provide tarpaulin sheets coverage on stockpiles
- Sorting and reuse of C&D materials as far as practicable
- Use of QPME and noise barrier/acoustic mat
- Regular maintenance of PMEs
- Implementation of wastewater and drainage management

| Activities | Key Issues | Key Mitigation Measures |
|--|---|--|
| Road widening works at Ying Hei Road Road D4, Road L7, ELS installation Contract No. NL/2020/07 - Tung Chung New Tow Land-based Works Open cut excavation, backfilling and pipe | , | |
| laying for rising main and watermain at Portion 146-1 to 146-14 Laying subbase and asphalt for temporary haul road along 146-1 to 146-14 Pak Mong bridge I-beam erection set up Trench excavation and pipe laying works at Portions 32 (Sham Shui Kok Drive) and Portion 38 Trench excavation and pipe laying works at Portion 32 (Access Road adjacent to MTRC Siu Ho Wan Depot) Backfilling at Portion 33 and 34 Establishment of pipe jacking works at Portion 33 ELS and grout curtain at Portion 32 for Receiving pit RC construction of retaining walls FR1 RC works for Pak Mong Subway Extension Phase 1 Preparation works for falsework at casting yard A1 and A2 ELS at A1a and A2b RC for RW-R2, RW-R3 and RW-R4 at Portion 146-2 to 146-4 RC construction at RW-R7 at Portion 31 Pile Load test and Mini-piles at Wall E | Handling and storage of C&D materials generated from construction activities Noise from plant operation Emission of dark smoke from PMEs Efficiency of wastewater and drainage management Tree protection | Regular water spraying on stockpiles, unpaved haul road and land filling area Provide tarpaulin sheets coverage on stockpiles Sorting and reuse of C&D materials as far as practicable Use of QPME and noise barrier/acoustic mat Regular maintenance of PMEs Implementation of wastewater and drainage management Retain and protect all existing trees and vegetation within the study area which are not directly affected by the works |



| Activities | Key Issues | Key Mitigation Measures |
|--|------------|-------------------------|
| Predrill works at Wall D Bored piles at Bridge C Portion 146-12 U channel and chain link fence construction at Portion 147-1 and 147-2 | | |
| Site clearance and tidiness | | |

The environmental mitigation implementation schedule is presented in *Annex B*.



1.5 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects is presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

TABLE 1.3 SUMMARY OF STATUS FOR THE ENVIRONMENTAL ASPECTS UNDER THE UPDATED EM&A MANUAL

| Parameters | Status |
|--|--|
| Air Quality | |
| Baseline Monitoring | The results of baseline air quality monitoring for TCE were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4 |
| Impact Monitoring | On-going for TCE, monitoring conducted three times every six days |
| Noise | |
| Baseline Monitoring | The results of baseline noise monitoring for TCE were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4 |
| Impact Monitoring | On-going for TCE, monitoring conducted once per week |
| Impact Monitoring for Road Traffic Noise during Operational Phase | To be conducted during operational phase |
| Fixed Noise Commissioning Test | To be implemented by the Contractor before operation of TCNTE |
| Water Quality | |
| Baseline Monitoring | The results of baseline water quality monitoring for TCE were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4 |
| Impact Monitoring | Suspended for TCE with approval from EPD |
| Waste Management | |
| Waste Monitoring | On-going |
| Land Contamination | |
| Contamination Assessment Plan (CAP), Remediation Action Plan (RAP) and Remediation Report (RR) | To be conducted under TCW. Refer to the EM&A Reports of TCW. |
| Ecology | |
| Monitoring for Compensation Woodland | Compensation Woodland Planting was completed on 30 September 2022 On-going, monitoring conducted quarterly |
| Monitoring for Emergent Plant inside the future River Park | To be conducted under TCW. Refer to the EM&A Reports of TCW. |
| Monitoring for Translocated Amphibians of Conservation Importance | To be conducted under TCW. Refer to the EM&A Reports of TCW. |
| Monitoring for Preserved/Transplanted Plant Species of Conservation Importance | On-going, for preserved plant species, monitoring conducted once per month; for transplanted plant species, replacement planting was carried out on 28 April 2023 and 19 September 2023. Monitoring conducted once |

| Parameters | Status |
|--|---|
| | per month for the first year, and quarterly for the second year. |
| Monitoring for Tung Chung Stream EIS and Wong Lung Hang EIS | To be conducted under TCW. Refer to the EM&A Reports of TCW. Monitoring for Wong Lung Hang was not required and the proposal was accepted by EPD on 2 September 2021 |
| Eco-shoreline Monitoring | The dry season monitoring between December 2023 and February 2024 was completed. Wet season monitoring was in progress. |
| Tung Chung Bay and Tai Ho Wan Baseline Monitoring | The results of baseline soft shore ecological monitoring at Tung Chung Bay and Tai Ho Wan were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4 |
| Tung Chung Bay and Tai Ho Wan Impact Monitoring | Completed |
| Tung Chung Bay and Tai Ho Wan Post- construction Monitoring | On-going for TCE, monitoring conducted quarterly |
| Landscape and Visual | |
| Baseline Monitoring | The results of baseline landscape and visual monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4 |
| Impact Monitoring | On-going |
| Site Environmental Audit | |
| Regular Site Inspection | On-going |
| Dolphin Watching Plan implementation measures | Completed |
| Works Vessel Travel Route Plan implementation measures | Completed |
| Silt Curtain Deployment Plan implementation measures | All silt curtain was removed in accordance with the Silt Curtain Deployment Plan and after obtaining the acceptance from EPD |
| Spill Response Plan implementation measures | Completed |
| Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance implementation measures | Under implementation by the Contractor of Contract 2 |
| Detailed Compensatory Woodland Planting Plan implementation measures | Under implementation by the Contractor of Contract 2 |
| Waste Management Plan implementation measures | Under implementation by the Contractor of Contract 1, 2, 3 and 7 |
| Complaint Hotline and Email Channel | Under implementation by the Contractor of Contract 1, 2, 3 and 7 |
| | Contract 1, 2, 3 and 7 |

Taking into account the construction works, impact monitoring of air quality, noise and waste management were carried out in the reporting period. The monitoring schedule of air quality and noise are provided in *Annex E2* and *Annex F2* respectively.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation



measures recommended in the approved EIA Report and relevant EP submissions, including Complaint Management Plan, Eco-shoreline Implementation Plan, Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance, Detailed Compensatory Woodland Planting Plan and Waste Management Plan.

To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarized as below:

- Four (4) environmental management committee meetings were held among the relevant contractors, ER, ET, IEC and CEDD on 26 and 9 July 2024 (for Contracts 1 and 7) and 17 July 2024 (for Contracts 2 and 3);
- Environmental toolbox trainings on mosquito control, nuisance to residence (light pollution/ sudden noise/dusty work), site hygiene (rubbish, moquito, rodent control), noise control, use of spill kits, site drainage management, chemical handling, dust control, waste management and disposal on 3, 5, 10, 12, 17, 19, 24, 26 and 31 July 2024 were conducted for Contract 1;
- Environmental toolbox trainings on environmental abatement facilities, cement debagging and mixing on 9 and 23 July 2024 were conducted for Contract 2;
- Environmental toolbox trainings on site clearance, formwork and falsework, fencing, excavation, breaking, drilling, cutting and polishing, loading, unloading and transfer material, stockpiling, anti-mosquitos control measures, chemical waste and handling of chemical spillages on 2, 4, 9, 11, 16, 18, 23, 25 and 30 July 2024 were conducted for Contract 3;
- Environmental toolbox trainings on wastewater handling, discharge and treatment facilities, waste collection, handling and disposal, handling and storage of chemicals/chemical waste and handling of chemical spillage, site plant and machinery (operation and maintenance), maintenance of site access, site boundary and haul roads on 3, 10, 17, 24 and 31 July 2024 were conducted for Contract 7.

1.6 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of mitigation measures are presented in *Annex C*.

1.7 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits, including environmental permit, discharge license under Water Pollution Control Ordinance, registration as chemical waste producer, construction noise permit and specified processes license, which were valid in the reporting period are presented in *Annex D*. No non-compliance with environmental statutory requirements was recorded.



EM&A RESULTS FOR TUNG CHUNG EAST

2.1 AIR QUALITY

2.1.1 MONITORING REQUIREMENTS AND EQUIPMENT

According to the Updated EM&A Manual of the Project, impact air quality monitoring in terms of 1-hour Total Suspended Particulate (TSP) was conducted three (3) times every six (6) days when the highest dust impact was expected. The Action and Limit Levels of the air quality monitoring is provided in *Table 2.1* below.

TABLE 2.1 ACTION AND LIMIT LEVELS FOR 1-HOUR TSP

| Location | Action Level (µg/m³) | Limit Level (µg/m³) |
|--|----------------------|---------------------|
| Monitoring station for Tung Chung East | 279 | 500 |

Portable direct reading dust meters were used to measure 1-hour TSP levels in undertaking the air quality monitoring for the Project. The proposed use of portable direct reading dust meters was submitted to IEC and obtained agreement from the IEC as stated in Section 5.5 of the Updated EM&A Manual. With the use of direct reading dust meter, it can allow prompt and direct results for the EM&A reporting and the implementation of the event and action plan. The portable direct reading dust meter would be calibrated every year against High Volume Sampler (HVS) to check the validity and accuracy of the results measured by direct reading method.

The monitoring location and equipment used in the impact air quality monitoring programme are summarized in *Table 2.2* and illustrated in *Figure 2.1*. Copies of the calibration certificates for the equipment are presented in *Annex E1*, which showed that the portable direct reading dust meter is capable of providing comparable results with that provided by a HVS.

TABLE 2.2 AIR QUALITY MONITORING DETAILS

| Monitoring Station | Location | Parameter | Frequency and Duration | Monitoring Dates | Equipment |
|-----------------------|--|------------|--|--------------------------------------|--|
| DM-1 | Tung Chung Area 56 – Ying Tung Estate | 1-hour TSP | Three times per six days during the construction period of the Project | 5, 11, 17, 23 and 29 July 2024 | 1-hour TSP Dust Meter SIBATA LD-3B (S/N: 436553) |

Note: It should be noted that impact monitoring at other construction dust monitoring locations at TCE as stated in the Updated EM&A Manual will commence after the flat intake (for Monitoring Stations DM-2, DM-3 and DM-4).


2.1.2 MONITORING SCHEDULE FOR THE REPORTING MONTH

The schedule for air quality monitoring during the reporting period is provided in *Annex E2*.

2.1.3 RESULTS AND OBSERVATIONS

The monitoring results for 1-hour TSP are summarized in *Table 2.3*. The monitoring data and the graphical presentation are provided in *Annex E3*.



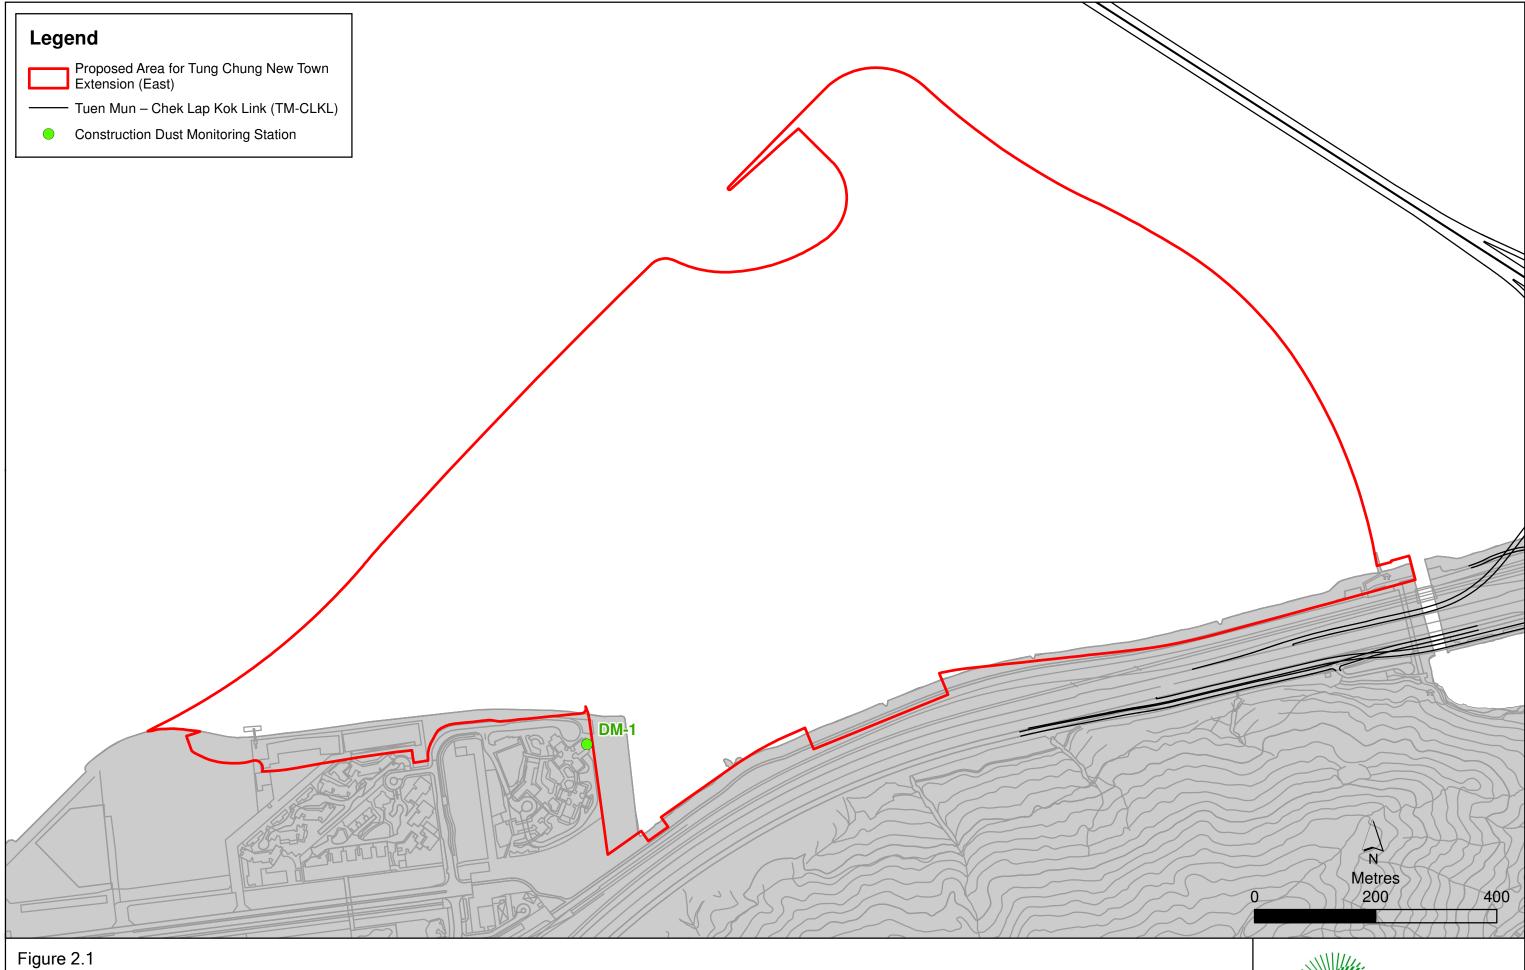

Construction Dust Monitoring Station Location



TABLE 2.3 SUMMARY OF 1-HOUR TSP MONITORING RESULTS IN THE REPORTING PERIOD

| Monitoring | Average | Range (µg/m³) | Action Level | Limit Level |
|------------|---------|---------------|--------------|-------------|
| Station | (μg/m³) | | (μg/m³) | (µg/m³) |
| DM-1 | 46 | 34-54 | 279 | 500 |

Major dust sources in the reporting period included haul road traffic and excavation under the Project.

No exceedance of Action and Limit Levels was recorded for construction air quality monitoring in the reporting period. No action was thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex E4*.

2.2 NOISE MONITORING

2.2.1 MONITORING REQUIREMENTS AND EQUIPMENT

According to the Updated EM&A Manual of the Project, impact noise monitoring was conducted once per week during the construction phase of the Project. The Action and Limit Level for construction noise of the Project is provided in *Table 2.4* below.

TABLE 2.4 ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE

| Time Period | Action Level | Limit Level |
|---|---|---------------|
| 0700 - 1900 hours on normal weekdays | When one documented complaint is received | 75 dB(A) a, b |

Note:

- a Limit level is exceeded when Leq \geq 75 dB(A). If works are to be carried out during restricted hours, the conditions stipulated in the construction noise permit issued by the Noise Control Authority have to be followed.
- b Reduce to 70 dB (A) for schools and 65 dB (A) during school examination periods.

Noise monitoring was performed using sound level meter at the designated monitoring stations NMS-CA-1A $^{(3)}$ (4) and NMS-CA-4 (*Figure 2.2; Table 2.5*) in accordance with the requirements stipulated in the Updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meters at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.5*. Copies of the calibration certificates for the equipment are presented in *Annex F1*.

TABLE 2.5 NOISE MONITORING DETAILS


| Monitoring Station ^a | Location | Parameter | Frequency and Duration | Monitoring Dates | Equipment |
|------------------------------------|---|---|--|--------------------------------------|---|
| NMS-CA-1A b | Residential premise in Tung Chung East – Century Link/Ying Hong Road ^c | 30-minute measurement between 0700 and 1900 on normal | Once per week for 30 mins during the construction | 5, 11, 17, 23 and 29 July 2024 | Sound Level Meter: Rion NL-52 (S/N: 00331806) |

⁽³⁾ Impact monitoring at monitoring station NMS-CA-1A commenced on 19 September 2018 in view of the close vicinity of the construction works near the residential area at Century Link.

⁽⁴⁾ Due to land handover issue, NMS-CA-1A was relocated to Ying Hong Road which is located 60m away from the original location. Proposal on the relocation of NMS-CA-1A was approved by IEC on 23 November 2018. Noise monitoring at the relocated location commenced since 24 November 2018.



_

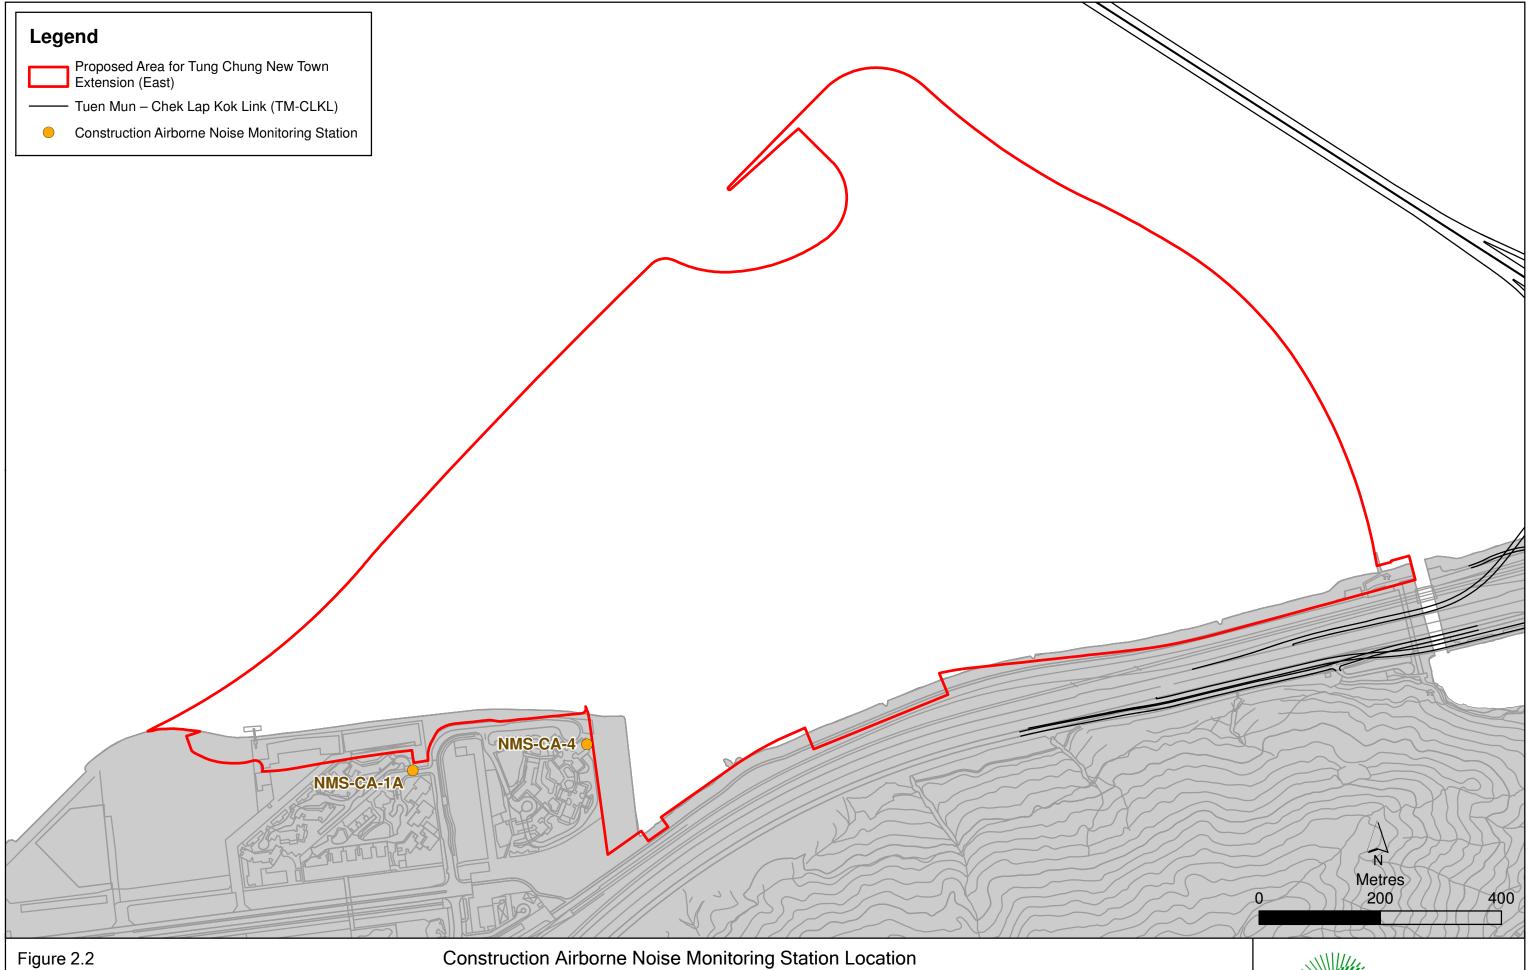

(Note: Due to land handover issue, NMS-CA-1A was relocated to Ying Hong Road which is located 60m away from the original location. Noise monitoring at the relocated location commenced since 24 November 2018.) File: T:\GIS\CONTRACT\0445700\mxd\0445700_Construction_Airborne_Noise_MS_CA4.mxd Date: 10/12/2018



| Monitoring Station ^a | Location | Parameter | Frequency and Duration | Monitoring Dates | Equipment |
|------------------------------------|---|--|--------------------------|---------------------|---|
| NMS-CA-4 | Residential premise in the reclamation area next to Tung Chung East – Ying Tung Estate | weekdays (Monday to Saturday). L_{eq} , L_{10} and L_{90} would be recorded. | period of the Project | | Acoustic Calibrator: LARSON DAVIS CAL200 (S/N: 16172) |

Note:

- a It should be noted that impact monitoring at other construction noise monitoring locations at TCE as stated in the Updated EM&A Manual will commence after the flat intake of residential premise in TCE (for Monitoring Station NMS-CA-1) and operation of schools (for Monitoring Stations NMS-CA-2 and NMS-CA-3).
- b Impact monitoring at monitoring station NMS-CA-1A commenced on 19 September 2018 in view of the close vicinity of the construction works near the residential area at Century Link.
- c Due to land handover issue, NMS-CA-1A was relocated to Ying Hong Road which is located 60m away from the original location. Proposal on the relocation of NMS-CA-1A was approved by IEC on 23 November 2018. Noise monitoring at the relocated location commenced since 24 November 2018.

2.2.2 MONITORING SCHEDULE FOR THE REPORTING MONTH

The schedule for noise monitoring during the reporting period is provided in *Annex F2*.

2.2.3 RESULTS AND OBSERVATIONS

Results for noise monitoring are summarized in *Table 2.6*. The monitoring data and the graphical presentation are provided in *Annex F3*.

TABLE 2.6 SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS IN THE REPORTING PERIOD

| Monitoring Station | Average, dB(A), L _{eq (30mins)} | Range, dB(A), L _{eq (30mins)} | Limit Level, dB(A), L _{eq (30mins)} |
|--------------------|---|---|---|
| NMS-CA-1A | 65.4 | 63.7-66.4 | 75 |
| NMS-CA-4 | 68.8 | 67.0-70.4 | 75 |

Major noise sources during the noise monitoring included noise from plant operation, craning, piling, haul road traffic, nearby traffic and aircraft as well as nearby construction sites.

No Action/Limit Level exceedance was recorded for construction noise monitoring in the reporting period. No action was thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F4*.

2.3 WATER QUALITY MONITORING

No monitoring event for impact water quality monitoring was conducted at all designated monitoring stations during the reporting period. Water quality monitoring has been suspended since 3 October 2023 as all reclamation works and marine construction activities have been completed.

2.4 COMPENSATION WOODLAND MONITORING

Compensation woodland planting under Contract 2 was completed on 30 September 2022. With the approval from EPD on the monitoring proposal in August 2023, quarterly post-planting monitoring for compensation woodland was commenced in September 2023. No



compensation woodland monitoring was carried out in the reporting month. Photographic record of the compensation woodland planting is provided in *Annex G*.

2.5 PRESERVED/TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE MONITORING

Plant species of conservation importance, including three individuals of *Aquilaria sinensis* and 33 individuals of *Gmelina chinensis*, were identified within works areas for Contract 2 during the survey conducted in August 2021. All individuals of *Aquilaria sinensis* and 31 individuals of *Gmelina chinensis* were recommended being preserved *in-situ* while two individuals of *Gmelina chinensis* (RT-07 and RT-08) were recommended being transplanted to the receptor site in accordance with the Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance approved under Condition 2.21 of EP-519/2016.

Initial tree survey was conducted in September 2021 under Contract No. NL/2020/02 before the commencement of construction works. According to the initial tree survey conducted, the *in-situ* preserved plant species of conservation importance of which one individual of *Aquilaria sinensis* and six individuals of *Gmelina chinensis* were found missing.

During the monthly monitoring of the *in-situ* preserved plant species of conservation importance in November 2023, one individual of *Aquilaria sinensis* and one individual of *Enkianthus quinqueflorus* were newly observed and recommended being preserved *in-situ*. Registration and measurement for two additional trees were conducted on 4 December 2023.

2.5.1 PRESERVED PLANT SPECIES OF CONSERVATION IMPORTANCE

Monthly monitoring of the *in-situ* preserved plant species of conservation importance by the Qualified Personnel (QP) appointed under Contract 2 was implemented in the reporting period. Health condition was considered fair for the majority of the *in-situ* preserved plant species of conservation importance, of which two individuals of *Gmelina chinensis* could not be monitored as a result of unsafe access to the locations, as recorded during the monitoring carried out on 23 July 2024.

Tree protection zones for the *in-situ* preserved plant species of conservation importance were demarcated. No injuries and/or damages to the individuals of the *in-situ* preserved plant species of conservation importance were reported by the QP since the previous monitoring events. Photographic record and tree schedule of the preserved plant species of conservation importance monitoring are provided in *Annex H1*.

The ET will continue to monitor the implementation of monitoring of *in-situ* preserved plant species of conservation importance.

2.5.2 TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE

Site visit to the receptor site for the transplanted plant species of conservation importance under Contract 2 was carried out on 20 January 2022 prior to the commencement of transplantation works for the transplanted plant species of conservation importance on 21 January 2022.

The transplanted plant species of conservation importance were both certified as dead trees by the QP on 15 June 2022 as no living signs were observed. Replacement planting of new trees of the same species, or other species to the satisfaction of the Project Manager, at the



Contractors' expense would be deemed necessary in accordance with the conditions under the approved Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance. Replacement planting of three (3) *Aquilaria sinensis* were completed on 28 April 2023. One (1) individual was certified dead by the QP as no living signs were observed on 26 July 2023. The removal of the dead tree and replanting of one (1) individual of *Aquilaria sinensis* were completed on 19 September 2023.

The establishment period of two (2) individuals of *Aquilaria sinensis* was ended on 27 April 2024 and quarterly monitoring was conducted in the reporting period.

Monitoring of the replacement planting of *Aquilaria sinensis* was carried out on 26 July 2024. Three (3) individuals of the replacement planting trees were in fair health condition. Sunscald was observed on tree trunk, and the QP will closely monitor the tree's condition. Photographic record and tree schedule of *Aquilaria sinensis* monitoring are provided in *Annex H2*.

The transplanted plant species of conservation importance were watered twice a week during the establishment period to keep the soil moist except in days with heavy rainfall. The ET will continue to monitor the implementation of monitoring of in-situ preserved/ transplanted plant species of conservation importance.

2.6 ECO-SHORELINE MONITORING

The construction of vertical eco-shoreline, mangrove eco-shoreline and rocky eco-shoreline has been substantially completed. Photographic record is provided in *Annex I*.

Wet season monitoring of ichthyoplankton was conducted using plankton net on 23 July 2024 while monitoring of juvenile fish was conducted using purse seine on 17 and 18 July 2024. Monitoring is conducted for at least 3 years after the completion of eco-shoreline, twice in wet season and twice in dry season, while ichthyoplankton and juvenile fish monitoring will be conducted on a monthly basis covering May to August for at least 3 years, in order to determine the effectiveness of the eco-shoreline in accordance with the Updated EM&A Manual and Eco-shoreline Implementation Plan.

2.7 SOFT SHORE ECOLOGICAL MONITORING

No post-construction soft shore ecological monitoring at Tung Chung Bay and Tai Ho Wan was scheduled during the reporting period. The post-construction soft shore ecological monitoring at Tung Chung Bay and Tai Ho Wan was scheduled to be conducted in September 2024 in accordance with the Updated EM&A Manual.

2.8 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, water quality, waste management, marine ecology, landscape and visual impacts and preservation and/or transplantation of plant species of conservation importance under the Project. In the reporting period, three (3) site inspections were carried out on 11, 18 and 26 July 2024 for Contract 1, five (5) site inspections were carried out on 3, 10, 17, 24 and 31 July 2024 for Contract 2, four (4) site inspections were carried out on 5, 12, 17 and 26 July 2024 for Contract 3 and five (5) site inspections were carried out on 2, 9, 16, 23 and 30 July 2024 for Contract 7.



Key observations during the site inspections are summarized in *Table 2.7*.

TABLE 2.7 KEY OBSERVATIONS IDENTIFIED DURING THE SITE INSPECTION IN THIS REPORTING MONTH

| Contract No. | Inspection Date | Environmental Observations | Recommendations/ Remarks | | |
|-----------------|------------------------|---|--|--|--|
| Contract 1 | 11 and 18 July 2024 | C1 Site Office • No deficiency was observed. | • Nil. | | |
| | 26 July 2024 | Area G • No deficiency was observed. | • Nil. | | |
| Contract 2 | 3 July 2024 | Portion 3 • Insufficient drainage control was observed. | Portion3 • The Contractor was urged to critically review the drainage / water divert system and the discharge license arrangement at Wong Lung Hang as the site condition had been changed significantly to prevent runoff. | | |
| | | Mud and debris were observed near road gullies. | TTA The Contractor was reminded to clean the mud and debris and keep the road gullies clean. | | |
| | 10 July 2024 | Portion 3 • Insufficient drainage control was observed. | Portion 3 • The Contractor was urged to critically review the drainage / water divert system and the discharge license arrangement at Wong Lung Hang as the site condition had been changed significantly to prevent runoff. | | |
| | | Man Tung Road Construction materials were placed near to retained trees. | Man Tung Road The Contractor was urged to remove the construction materials away from retained trees. | | |
| | 17 July 2024 | Portion 3 • Insufficient drainage control was observed. | Portion 3 The Contractor was urged to critically review the drainage / water divert system and the discharge license arrangement at Wong Lung Hang as the site condition had been changed significantly to prevent runoff. | | |
| | | Portion 6 • Chemical containers were observed placing on the ground. | Portion 6 • Contractor was reminded to provide drip tray for chemicals. | | |
| | 24 July 2024 | Portion 3General waste was observed on ground. | Portion 3 The Contractor was reminded to remove waste and maintain a good housekeeping. | | |
| | 31 July 2024 | Portion 3 • General waste and branches were observed in drainage. | Portion 3 • The Contractor was urged to remove the refuse and keep the | | |



| Contract No. | Inspection Date | Environmental Observations | Recommendations/ Remarks | | |
|-----------------|--------------------|---|--|--|--|
| | | | drainage clean. | | |
| Contract 3 | 5 July 2024 | Portion 16b, 104, TTA • No deficiency was observed. | • Nil. | | |
| | 12 July 2024 | Portion 16b, 104, TTA • No deficiency was observed. | • Nil. | | |
| | 17 July 2024 | Portion 7, 10, 16b, 104, TTA No deficiency was observed. | • Nil. | | |
| | 26 July 2024 | Portion 16b • General refuse was observed on ground. | Portion 16b • The Contractor was reminded to remove waste and maintain a good housekeeping. | | |
| Contract 7 | 2 July 2024 | Portion 146 • No deficiency was observed. | • Nil. | | |
| | 9 July 2024 | Portion 146 • Dry and dusty haul road was observed Portion 146 • The Contractor was reminded provide adequate dust mitigation measures, such watering. | | | |
| | 16 July 2024 | Portion 146 • General refuse was scattered on ground. | Portion 146 • The Contractor was reminded to remove the refuse and provide sufficient rubbish bins. | | |
| | 23 July 2024 | Portion 146 • No deficiency was observed. | • Nil. | | |
| | 30 July 2024 | Portion 146 • Appropriate Non- Road Mobile Machinery (NRMM) label was not observed on generator. | Portion 146 • The Contractor was reminded to affix appropriate NRMM labels in accordance with the Air Pollution Control (Non-Road Mobile Machinery) (Emission) Regulation. | | |
| | | Chemical container was observed placing on the ground. | The Contractor was reminded to place the chemical container in drip tray. | | |

The Contractors have rectified all of the observations identified during environmental site inspections in the reporting period. The Contractors were reminded to implement all relevant mitigation measures related to construction dust, construction noise, water quality and waste management outlined in the EIA Report and Updated EM&A Manual.

2.9 WASTE MANAGEMENT STATUS

The Contractors of Contract 1, 2, 3 and 7 have registered as chemical waste producer. Sufficient numbers of receptacles were available for general refuse collection and sorting.



All dump trucks engaged on site was equipped with RTTM system during the reporting period. The Surveillance Team of the ET conducted regular site inspection on the dump trucks and their track records. No illegal dumping and landfilling of C&D materials was found during the reporting period.

Wastes generated during this reporting period include mainly non-inert construction wastes. Reference has been made to the waste flow tables prepared by the Contractors. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.8*.

TABLE 2.8 QUANTITIES OF DIFFERENT WASTE GENERATED AND IMPORTED FILL MATERIALS

| Contract No. | Month/ Year | Inert C&D Materials ^a (m³) | Imported Fill b (sand) (m³) | Imported Fill ^c (public fill) (m ³) | Inert Construction Waste Re- used ^d (m ³) | Non-inert Constructi on Waste ^e (m³) | Recyclable Materials ^f (kg) | Chemical Wastes (kg) |
|-----------------|-------------------|---|-----------------------------|--|---|--|--|----------------------------|
| TCNTE (East) | 1 to 31 May 24 | 0.0 | 0.0 | 0.0 | 0.0 | 401.2 | 0.0 | 0.0 |
| | 1 to 30 Jun 24 | 0.0 | 0.0 | 0.0 | 1,755.0 | 285.9 | 0.0 | 0.0 |
| | 1 to 31 Jul 24 | 0.0 | 0.0 | 0.0 | 506.0 | 320.7 | 450.5 | 0.0 |

Note:

- a Inert construction wastes include hard rock and large broken concrete, and materials disposed as public fill.
- b Imported materials include of sand fill from any source outside of TCNTE.
- c Imported sorted public fill include all G200, G400 and glass gullet (local recycling materials) from any source outside of TCNTE.
- d Reuse of inert construction waste generated under the TCNTE contracts.
- e Non-inert construction wastes include general refuse disposed at landfill.
- f Recyclable materials include metals, paper, cardboard, plastics and others.

2.10 LANDSCAPE AND VISUAL MONITORING

Implementation of applicable landscape and visual mitigation measures was monitored in accordance with the Updated EM&A Manual. All measures undertaken by the Contractor during the construction phase and establishment work phase shall be audited by ET to ensure compliance with the intended aims of the measures.

The implementation status of the environmental protection measures is summarized below in *Table 2.9*. Examples of landscape and visual mitigation measures are presented in *Annex J1*. The monitoring programme for detailed design, construction and establishment stages is presented in *Table 2.10*. Event and Action Plan for Landscape and Visual impacts is stated in *Annex J2*.

TABLE 2.9 IMPLEMENTATION STATUS OF LANDSCAPE AND VISUAL MITIGATION MEASURES

| Landscape and Visual Mitigation Measures during Construction | Implementation Status | Relevant Contract(s) in the Reporting Period |
|---|---|--|
| MM1 – Optimization of Construction Areas & Providing Temporary Landscape on Temporary Construction | Implementation of the measures were carried out during the detailed design stage of the Project. | NA |
| MM2 – Minimize Topographical Changes | Implementation of the measures were carried out during the detailed design stage of the Project. | NA |
| MM3 – Preservation of Potentially Registerable OVTs, | Tree Protection Specifications were provided in the relevant Contract Specifications respectively for implementation by the Contractors under the Project. | All works contracts |
| Rare and Protective Vegetation | The Contractors submitted Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance under EP condition 2.21. | |
| | The Contractors' performance on the implementation of the tree maintenance and protection measures were observed and checked by the ET weekly during construction period. | |
| MM4 – Transplanting of Existing Trees | Tree Transplanting Specifications were provided in the relevant Contract Specifications respectively for implementation by the Contractors under the Project where trees would unavoidably be affected by the construction works. | Contract 2 |
| | The Contractors submitted Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance under EP condition 2.21. | |
| | The transplanted plant species of conservation importance were both certified as dead trees by the QP on 15 June 2022 as no living signs were observed. | |
| MM5 - Screen Hoarding | The implementation of mitigation measures was checked by ET during weekly site inspection. Implementation of the measures by Contractors was observed. | All works contracts |
| MM6 – Adopting Non-dredge Method for the Reclamation | Not applicable during the reporting period. | NA |
| MM9 – Providing Natural Rock Material/ Planting for Artificial Seawall | Rock armour reused and construction of eco-shoreline (mangrove eco-shoreline, rocky eco-shoreline and vertical eco-shoreline) in progress. The implementation of mitigation measures was checked by ET during weekly site inspection. Implementation of the measures by Contractors was observed. | Contract 1 |



| Landscape and Visual Mitigation Measures during Construction | Implementation Status | Relevant Contract(s) in the Reporting Period |
|--|--|--|
| MM10 - Compensatory Planting | Not applicable during the reporting period. | NA |
| MM11 – Woodland Restoration | The implementation of mitigation measures was checked by ET during weekly site inspection. Implementation of the measures by Contractors was observed. | Contract 2 |
| MM12 - Screen Planting | Not applicable during the reporting period. | NA |
| MM13 - Roadside Planting | Not applicable during the reporting period. | NA |
| MM14 – Aesthetic Design of Built Development | Not applicable during the reporting period. | NA |
| MM15 – Maximise Greening on Structures | Not applicable during the reporting period. | NA |
| MM16 – Noise Barrier Design | Not applicable during the reporting period. | NA |
| MM18 – Landscaping on Slopes | Not applicable during the reporting period. | NA |
| MM20 – Lighting Control | The implementation of mitigation measures was checked by ET during weekly site inspection. Implementation of the measures by Contractors was observed. | All works contracts |

TABLE 2.10 MONITORING PROGRAMME FOR LANDSCAPE AND VISUAL

| Stage | Monitoring Task | Monitoring Report | Form of Approval | Frequency |
|------------------------|---|--|------------------------------------|-------------------------------|
| Design | Monitoring of design works against the recommendations of the landscape and visual impact assessments within the EIA should be undertaken by the Engineer and Landscape Architect, to ensure that they fulfil the intentions of the mitigation measures. Any changes to the design, including design changes on site should also be checked | Report by CEDD / ER confirming that the design conforms to requirements of EP. | Approval by Project Proponent | At completion of design stage |
| Construction | Monitoring of the contractor's operations during the construction period. | Report on Contractor's compliance by ET | Counter-signature of report by IEC | Monthly |
| Establishment Works | Monitoring of the planting works during the 24-months Establishment Period after completion of the construction works. | Report on Contractor's compliance by ET | Counter-signature of report by IEC | Bi-monthly |



2.11 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

2.12 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There was no notification of summons or prosecution recorded in the reporting period.

One (1) environmental complaint related to Contract 3. Investigation was conducted for the environmental complaint in accordance with the complaint handling process as stated in the Complaint Management Plan. Environmental complaints in the reporting period are summarized below.

| | Complaint(s) | Investigation/Follow up action(s) |
|---|--|---|
| 1 | Environmental complaint related to Contract 3 regarding dust nuisance from the construction site near Ying Hei Road (South) was received on 28 June 2024 and referred by EPD on 5 July 2024. | Based on the information provided by the Contractor with confirmation from RSS, water trucks and road sweepers have been deployed to clean Ying Hei Road (between Ying Tung Estate and Yi Tung Road) at least four time on each working day for dust control. Based on ET's regular inspection, wheel washing facilities were installed and operated at the exit gate of the TCE reclamation area for a thorough cleanse of car wheel before leaving the site. In addition, there are other construction sites nearby, which could also be potential contributors to the mentioned dust. Nevertheless, the Contractor provided morning brief to workers and foreman regarding dust control. |

Statistics on complaints, notifications of summons, successful prosecutions are summarised in Annex K.

3. FUTURE KEY ISSUES

3.1 CONSTRUCTION PROGRAMME FOR THE COMING MONTH

Works to be undertaken in the next monitoring period of August 2024 are summarized in *Table 3.1* below, together with the key issues and the key mitigation measures:



TABLE 3.1 MAJOR ACTIVITIES FOR THE NEXT REPORTING PERIOD

| Activities | Key Issues | Key Mitigation Measures | | | | | | |
|--|--|---|--|--|--|--|--|--|
| Contract No. NL/2017/03 - Tung Chung New | Town Extension – Reclamation and Advance V | Vorks (Contract 1) | | | | | | |
| Land-based Works | Land-based Works | | | | | | | |
| Removal of siltation at IORC | Dust emission Handling and storage of C&D materials generated from construction activities Noise from plant operation Emission of dark smoke from PMEs Efficiency of wastewater and drainage management Potential surface runoff Noise from plant operation during normal working hours or restricted hours Dust emission during storage and transfer of sand/ sorted public fill | Good site practices Regular water spraying on stockpiles, unpaved haul road and land filling area Provide tarpaulin sheets coverage on stockpiles Sorting and reuse of C&D materials as far as practicable Use of QPME and noise barrier/acoustic mat Regular maintenance of PMEs Implementation of wastewater and drainage management Strictly follow requirement under CNP for the use of PMEs and works within restricted period Use of acoustic mat and other noise mitigation measures when necessary Regular maintenance of engines and mechanical equipment | | | | | | |

Contract No. NL/2020/02 - Tung Chung New Town Extension - Salt Water Supply System (Contract 2)

Land-based Works

- Construction of pumping station at Portion 6
- Construction of Intake Culvert at Portion 6
- Construction of service reservoir, TMF mainlaying at Portion 3
- CLP cable duct laying works at Wong Lung Hang at Portion 3
- Dust emission
- Handling and storage of C&D materials generated from construction activities
- Noise from plant operation
- Emission of dark smoke from PMEs
- Efficiency of wastewater and drainage management

- Good site practices
- Regular water spraying on stockpiles, unpaved haul road and land filling area
- Provide tarpaulin sheets coverage on stockpiles
- Sorting and reuse of C&D materials as far as practicable



| Activities | Key Issues | Key Mitigation Measures |
|---|-----------------|--|
| Watermain laying works at Portion 3 along Man Tung Road, Tung Chung Road and inside WSD facilities Watermain laying works at Yi Tung Road at Portion 4 Manhole construction and pipe laying for drainage works at Portion 5A Construction of T-Junction in Yi Tung Road at Portion 5 | Tree protection | Use of QPME and noise barrier/acoustic mat Regular maintenance of PMEs Implementation of wastewater and drainage management Retain and protect all existing trees and vegetation within the study area which are not directly affected by the works |

Contract No. NL/2020/03 - Tung Chung New Town Extension - Major Infrastructure Works in Tung Chung East (Contract 3)

Land-based Works

- Excavation and ELS works at Portion 104
- Excavation and ELS works at CUT no.1, 2, 3, 4 and supporting building
- Construction works for CUT no. 1 structure
- · Back-filling works for CUT 2
- Construction works and furniture installation of PM office at WA9
- Construction works of Contractor office at WA6
- Drainage, Sewerage and watermain works at Road L4, L3, L5 and Portion 16
- DCS works at Road L4 and L3.
- Pipe laying works for twin rising mains/ watermain laying at Man Tung Road
- Preparation and pipe jacking works at Ying Tung Road
- Pipe jacking works at Yi Tung Road
- Foundation and backfilling works for noise barrier at Portion 11
- Road and drainage works in Road P1

- Dust emission
- Handling and storage of C&D materials generated from construction activities
- Noise from plant operation
- Emission of dark smoke from PMEs
- Efficiency of wastewater and drainage management

- Good site practices
- Regular water spraying on stockpiles, unpaved haul road and land filling area
- Provide tarpaulin sheets coverage on stockpiles
- Sorting and reuse of C&D materials as far as practicable
- Use of QPME and noise barrier/acoustic mat
- Regular maintenance of PMEs
- Implementation of wastewater and drainage management



| Activities | Key Issues | Key Mitigation Measures |
|--|---|--|
| Road widening works at Ying Hei Road Road D4, Road L7, ELS installation | | |
| Contract No. NL/2020/07 - Tung Chung Ne | w Town Extension – Tai Ho Interchange (Con | tract 7) |
| Land-based Works | | |
| Open cut excavation, backfilling and pipe laying for rising main and watermain at Portion 146-1 to 146-5 Laying subbase and asphalt for temporary | Dust emission Handling and storage of C&D materials generated from construction activities | Good site practices Regular water spraying on stockpiles, unpaved haul road and land filling area Provide tarnaulin sheets coverage on |

 Trench excavation and pipe laying works at Portions 32 (Sham Shui Kok Drive) and Portion 38

construction of abutment and diaphragm

- Trench excavation and pipe laying works at Portion 32 (Access Road adjacent to MTRC Siu Ho Wan Depot)
- Establishment of pipe jacking works at Portion 33

haul road along 146-1 to 146-14

Pak Mong bridge I-beam erection, insitu

- Horizontal grouting at Receiving pit at Portion 32
- RC construction of Retaining Wall FR1
- Pak Mong Subway Extension Phase 1 Temporary Pedestrian Diversion
- Preparation works for falsework at casting yard A1 and A2
- ELS at A1a and A2b
- RC for RW-R1, RW-R2, RW-R3 and RW-R4 at Portion 146-2 to 146-4
- RC construction at RW-R7 at Portion 31
- RC works at Wall E
- Mini-piles at Wall D

- Noise from plant operation
- Emission of dark smoke from PMEs
- Efficiency of wastewater and drainage management
- Tree protection

- Provide tarpaulin sheets coverage on stockpiles
- Sorting and reuse of C&D materials as far as practicable
- Use of QPME and noise barrier/acoustic mat
- Regular maintenance of PMEs
- Implementation of wastewater and drainage management
- Retain and protect all existing trees and vegetation within the study area which are not directly affected by the works

| Activities | Key Issues | Key Mitigation Measures |
|--|------------|-------------------------|
| Bored piles at Bridge C at Portion 146-12 U channel and chain link fence construction at Portion 147-1 and 147-2 Site clearance and tidiness | | |



CLIENT: Civil Engineering and Development Department
PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01

PROJECT NO: 0445700 DATE: 14 August 2024 VERSION: 01

Page 26

The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures. The ET will also recommend to the Contractors about the environmental toolbox topics on the abovementioned key issues for the next reporting period.

3.2 MONITORING SCHEDULE FOR THE COMING MONTH

The tentative schedules for environmental monitoring in August 2024 are provided in Annex L.



4. CONCLUSION AND RECOMMENDATION

This EM&A Report presents the findings of the EM&A activities undertaken for the TCE Project during the period from 1 to 31 July 2024 in accordance with the Updated EM&A Manual and the requirements of the Environmental Permit (*EP-519/2016*).

Air quality (1-hour TSP), noise, eco-shoreline, compensation woodland, in-situ preserved plant species of conservation importance and transplanted plant species of conservation importance monitoring were carried out in the reporting period.

The monitoring results for air quality monitoring (1-hour TSP) complied with the Action/ Limit levels in the reporting period.

No exceedance of Action/Limit Level was recorded for construction noise monitoring in the reporting period.

Water quality monitoring was suspended in the reporting period.

Mangrove eco-shoreline, rocky eco-shoreline and vertical eco-shoreline were completed. Wet season monitoring was conducted during the reporting period.

No post-construction soft shore ecological monitoring at Tung Chung Bay and Tai Ho Wan was conducted during the reporting period.

No compensation woodland monitoring was carried out in the reporting month.

Monitoring of the *in-situ* preserved plant species of conservation importance and monitoring of the transplanted plant species of conservation importance were carried out in the reporting period.


Environmental site inspections were carried out during the reporting period. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site inspections.

There were no notification of summons or prosecution recorded in the reporting period. One (1) environmental complaint related to Contract 3. Investigation was conducted for the environmental complaint in accordance with the complaint handling process as stated in the Complaint Management Plan.

The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.



ANNEX A PROJECT ORGANISATION

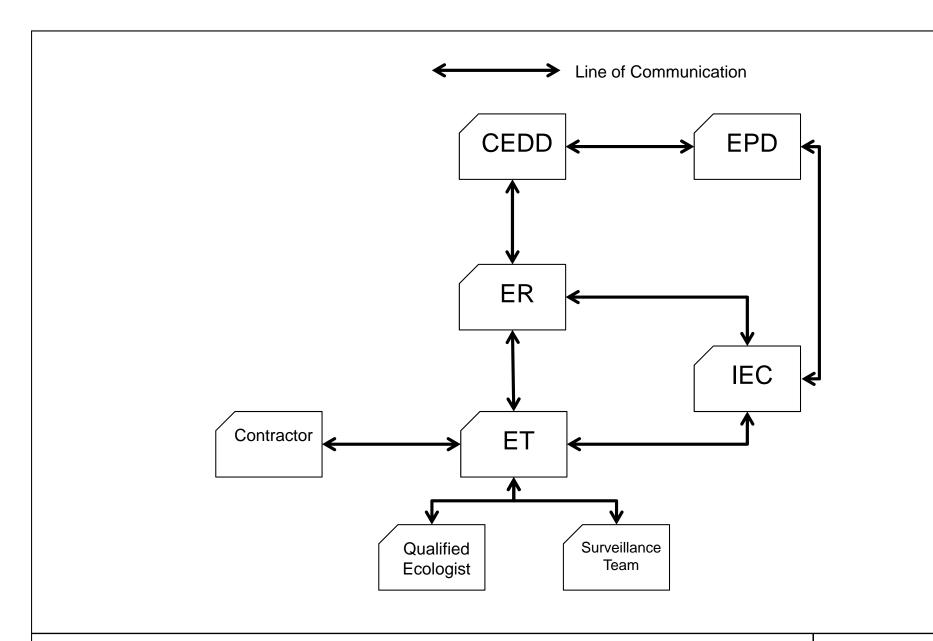

Annex A

Project Organization for Environmental Works





ANNEX B

ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

Note: Chapters 1 to 2 of the EIA report present the background information of the Project, identified concurrent projects, objectives and scope for various environmental aspects, and description on alternative options and construction description. Chapters 3 to 12 of the EIA report present the EIA findings and mitigation measures are described below with cross-reference to the EIA report. Chapters 13 to 15 describe the environmental monitoring requirements, summary of environmental outcomes and conclusion.

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|---|---|---|-------------------------|------------------------|-------------------------|--|
| Common | mon Mitigation Measures (Applicable to ALL Project Components, including DPs and Non-DPs) | | | | | | |
| Construc | tion Dust In | npact | | | | | |
| S3.4.6 | D1 | Water spraying every hour on exposed worksites and haul road. | Minimize dust impact at the nearby sensitive receivers | Contractor | All construction sites | Construction stage | APCO To control the dust impact to meet HKAQO and TM-EIAO criteria |
| S3.4.6 | D2 | The contractor shall follow the procedures and requirements given in the Air Pollution Control (Construction Dust) Regulation | Minimize dust impact at the nearby sensitive receivers | Contractor | All construction sites | Construction stage | APCO To control the dust impact to meet HKAQO and TM-EIAO criteria |
| S3.4.6 | D3 | The following dust suppression measures should be incorporated to control the dust nuisance throughout the construction phase: • Any excavated or stockpile of dusty material should be covered entirely by impervious sheeting or sprayed with water to maintain the entire surface wet and then removed or backfilled or reinstated where practicable within 24 hours of the excavation or unloading; • Any dusty materials remaining after a stockpile is removed should be wetted with water and cleared from the surface of roads; | Minimize dust impact at the nearby sensitive receivers | Contractor | All construction sites | Construction stage | APCO To control the dust impact to meet HKAQO and TM-EIAO criteria |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|----------------------|-------------------------|---|
| | | A stockpile of dusty material should not be extended beyond the pedestrian barriers, fencing or traffic cones; | | | | | |
| | | • The load of dusty materials on a vehicle leaving a construction site should be covered entirely by impervious sheeting to ensure that the dusty materials do not leak from the vehicle; | | | | | |
| | | Where practicable, vehicle washing facilities with high pressure water jet should be provided at every discernible or designated vehicle exit point. The area where vehicle washing takes place and the road section between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores; | | | | | |
| | | When there are open excavation and reinstatement works, hoarding of not less than 2.4m high should be provided as far as practicable along the site boundary with provision for public crossing. Good site practice shall also be adopted by the Contractor to ensure the conditions of the hoardings are properly maintained throughout the construction period; | | | | | |
| | | • The portion of any road leading only to construction site that is within 30m of a vehicle entrance or exit should be kept clear of dusty materials; | | | | | |
| | | Surfaces where any pneumatic or power-driven drilling, cutting, polishing or other mechanical breaking operation takes place should be sprayed with water or a dust suppression chemical continuously; | | | | | |
| | | Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to maintain the entire surface wet; | | | | | |
| | | • Where a scaffolding is erected around the perimeter of a building under construction, effective dust screens, | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|--|-------------------------|---|
| | | sheeting or netting should be provided to enclose the scaffolding from the ground floor level of the building, or a canopy should be provided from the first floor level up to the highest level of the scaffolding; | | | | | |
| | | • Any skip hoist for material transport should be totally enclosed by impervious sheeting; | | | | | |
| | | • Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides; | | | | | |
| | | • Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed; | | | | | |
| | | • Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system; and | | | | | |
| | | • Exposed earth should be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shortcrete or other suitable surface stabiliser within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies. | | | | | |
| S3.4.6 | D4 | Implement regular dust monitoring under EM&A programme during the construction stage. | Monitoring of dust impact | Contractor | Selected dust monitoring stations | Construction stage | • TM-EIAO |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|-------------------------|---|
| Construc | ction Noise | | | | | | |
| S4.3.4 | NI | Implement the following good site management practices: only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme; machines and plant (such as trucks, cranes) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum; plant known to emit noise strongly in one direction, where possible, be orientated so that the noise is directed away from nearby NSRs; silencers or mufflers on construction equipment should be properly fitted and maintained during the construction works; mobile plant should be sited as far away from NSRs as possible and practicable; material stockpiles, site office and other structures should be effectively utilised, where practicable, to screen noise | Control construction airborne noise | Contractor | All construction sites where practicable | Construction stage | • Annex 5, TM-EIAO |
| S4.3.4 | N2 | from on-site construction activities. Use of quiet plant which should be made reference to the Powered Mechanical Equipment (PME) listed in the Technical Memorandum or the Quality Powered Mechanical Equipment (QPME) / other commonly used PME listed in Environmental Protection Department (EPD) web pages as far as possible which includes the Sound Power Level (SWLs) for specific quiet PME. | Reduce the noise levels of plant items | Contractor | All construction sites where practicable | Construction stage | • Annex 5, TM-EIAO |
| S4.3.4 | N3 | Install movable temporary noise barriers (typical design is wooden framed barrier with a small-cantilevered upper portion of superficial density no less than 7kg/m² on a skid | Screen the noisy plant items to be used at all | Contractor | All construction sites where | Construction stage | • Annex 5, TM- EIAO |

| EIA EM&A Ref. Log Ro | Racammandad Mittaatian Magairea | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|----------------------|---|---|---|--|--|---|
| | footing with 25mm thick internal sound absorptive lining), and full enclosure, screen the noisy plants including air compressors, generators etc. | construction sites | | practicable | | |
| S4.3.4 N4 | Implement a noise monitoring under EM&A programme. | Monitor the construction noise levels at the selected representative locations | Contractor | Selected noise monitoring stations | Construction stage | • TM-EIAO |
| Operational Noise | (Road Traffic Noise) | | | | | |
| S4.5.4 N5 | Provide a series of noise mitigation measures including low noise surfacing material, noise barriers, facades with no openable window, school boundary walls and architectural fins before occupation of the protected NSRs. Locations of noise mitigation measures are stated as following: Year 2023: • Facade with no openable window at B1-1 and B1-2 for TCE; TCV-6 for TCW • 1.5m long architectural fin at B1-1 and B1-2 for TCE • Approx. 50m long, 4m high school boundary wall at possible school development near Tung Chung Area 39 • Approx. 120m long, 5m high vertical barrier with 3m cantilevered arm at 45° at the corner at junction between Chung Mun Road and Road L24 • Approx. 210m long LNRS along Chung Mun Road • Approx. 160m long LNRS along Road L24 • Approx. 160m long LNRS along Road L30 | from road traffic | Relevant government departments / Private developers | Refer to Figure 6.1, Figure 6.1a- b, Figure 6.2, Figures 6.2a-b, Figure 6.3, Figures 6.3a-d, Figure 6.4, and Figures 6.4a-e | of the Project for existing NSRs. While for mitigation measures to protect planned NSRs, it should be constructed before population intake | |
| | Approx. 210m long LNRS along Chung Mun Road Approx. 160m long LNRS along Road L24 | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|----------------------|-------------------------|---|
| | | D1-2, D2-3 and D2-4 for TCE; TCV-6 for TCW | | | | | |
| | | • 1.5m long architectural fin at B1-1, B1-2 and D2-4 for TCE; TCV-1 for TCW | | | | | |
| | | • Approx. 60m long, 5m high school boundary wall along Road L3 | | | | | |
| | | • Approx. 70m long, 5m high school boundary wall with 3m cantilevered arm at 45° along Road L3 | | | | | |
| | | • Approx. 50m long, 4m high school boundary wall at possible school development near Tung Chung Area 39 | | | | | |
| | | Approx. 120m long, 5m high vertical barrier with 3m cantilevered arm at 45° at the corner at junction between Chung Mun Road and Road L24 | | | | | |
| | | Approx. 210m long LNRS along Chung Mun Road | | | | | |
| | | Approx. 160m long LNRS along Road L24 | | | | | |
| | | • Approx. 160m long LNRS along Road L30 | | | | | |
| | | Year 2027: | | | | | |
| | | • Facade with no openable window at A1-1, A1-2, A2-1, A2-2, A2-3, A2-4, B1-1, B1-2, D1-1, D1-2, D2-3 and D2-4 for TCE; TCV-6 for TCW | | | | | |
| | | • 1.5m long architectural fin at A2-1, A2-4, B1-1, B1-2 and D2-4 for TCE; | | | | | |
| | | • 1.8m long architectural fin at A1-1, A1-2, A2-1 and A2-4 | | | | | |
| | | • Approx. 60m long, 5m high school boundary wall along Road L3 | | | | | |
| | | • Approx. 70m long, 5m high school boundary wall with 3m cantilevered arm at 45° along Road L3 | | | | | |
| | | • Approx. 50m long, 4m high school boundary wall at | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|----------------------|-------------------------|---|
| | | possible school development near Tung Chung Area 39 | | | | | |
| | | Approx. 120m long, 5m high vertical barrier with 3m cantilevered arm at 45° at the corner at junction between Chung Mun Road and Road L24 | | | | | |
| | | Approx. 210m long LNRS along Chung Mun Road | | | | | |
| | | • Approx. 160m long LNRS along Road L24 | | | | | |
| | | • Approx. 160m long LNRS along Road L30 | | | | | |
| | | Year 2045: | | | | | |
| | | • Facade with no openable window at A1-1, A1-2, A2-1, A2-2, A2-3, A2-4, B1-1, B1-2, C1-1, C2-1, C2-2, D1-1, D1-2, D2-3, D2-4, E1-4 and E1-5 for TCE; TCV-1 and TCV-6 for TCW | | | | | |
| | | • 1.5m long architectural fin at A2-1, A2-4, B1-1, B1-2, C1-1 and D2-4 for TCE; TCV-1 for TCW | | | | | |
| | | • 1.8m long architectural fin at A1-1, A1-2, A2-1, A2-4 and C1-1 | | | | | |
| | | • Approx. 100m long, 5m high absorptive vertical barrier along Road D3 | | | | | |
| | | • Approx. 50m long, 5m high absorptive vertical barrier with 3m cantilevered arm at 45° along Road L7 | | | | | |
| | | • Approx. 60m long, 5m high school boundary wall along Road L3 | | | | | |
| | | • Approx. 70m long, 5m high school boundary wall with 3m cantilevered arm at 45° along Road L3 | | | | | |
| | | • Approx. 80m long, 4m high school boundary wall along Road L2 | | | | | |
| | | • Approx. 40m long, 3m high school boundary wall along Road L2 | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|--|-----------------------------------|-----------------------------------|---|
| | | Approx. 50m long, 4m high school boundary wall at possible school development near Tung Chung Area 39 | | | | | |
| | | • Approx. 120m long, 5m high vertical barrier with 3m cantilevered arm at 45° at the corner at junction between Chung Mun Road and Road L24 | | | | | |
| | | Approx. 210m long LNRS along Chung Mun Road | | | | | |
| | | Approx. 160m long LNRS along Road L24 | | | | | |
| | | Approx. 160m long LNRS along Road L30 | | | | | |
| Operatio | nal Noise (I | Fixed Noise) | | | | | |
| S4.6.4 | N6 | For existing and planned NSRs which are located near to the proposed noise sources, the following tentative noise mitigation measures are considered: • All the pumps should be enclosed inside building structures; • Proper selection of quiet plant to reduce the tonality at NSRs; • Installation of silencer / acoustic enclosure / acoustic louvers for the exhaust of ventilation system. • For underground train stations, sound attenuators with sufficient attenuations can be installed to the ventilation shafts. • Openings of ventilation system should be located away from NSRs. | Reduce operation fixed noise | Relevant government departments / Future Operator | All plant rooms where practicable | Prior to operation of the Project | Noise Control Ordinance and its TM, TM- EIAO |
| On anatio | nal Noise (I | Pail Noise | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|-------------------------|---|
| S4.8.4 | N7 | Facade with no openable windows for residential block at B1-2 1.5m long architectural fin at B1-2 Before Phase 3 is occupied: It should be noted that Railway Stations at TCE and TCW and its associated railway system is a Designated Project under Item A.2 of Schedule 2 of TM-EIAO. Hence, the proposed mitigation measures are tentative for cumulative assessment purpose in this EIA and all the mitigation measures will be revised by the railway operator during their Schedule 2 EIA. Approx. 325m long, semi enclosure along the tracks of Tung Chung Line facing B0-2 and COM-1 Approx. 210m long, semi enclosure along the tracks of Tung Chung Line facing A1-2 and C1-1 Approx. 390m long, semi enclosure along the track of Tung Chung Line to Tung Chung direction facing C1-1 to C2-1 Approx. 630m long, semi enclosure along the track of Tung Chung Line to Hong Kong direction facing C1-1 and C2-1 | Reduce operation rail noise | government | Refer to Figure 6.1, Figure 6.1a-b, Figure 6.2, Figures 6.2a-b, Figures 6.3a-d, Figure 6.4, and Figures 6.4a-e | population intake | Noise Control Ordinance and its TM, TM- EIAO |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|-------------------------|---|-------------------------|--|
| Water Q | uality (Const | ruction Phase) | | | | | |
| S5.4.3 | W1 | General Construction Activities In accordance with the Practice Note for Professional Persons on Construction Site Drainage, Environmental Protection Department, 1994 (ProPECC PNI/94), best management practices should be implemented on site as far as practicable. The best practices are detailed below: At the start of site establishment, perimeter cut-off drains to direct off-site water around the site should be constructed with internal drainage works. Channels, earth bunds or sand bag barriers should be provided on site to direct stormwater to silt removal facilities.; Diversion of natural stormwater should be provided as far as possible. The design of temporary on-site drainage should prevent runoff going through site surface, construction machinery and equipment in order to avoid or minimize polluted runoff. Sedimentation tanks with sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m3 capacities, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity shall be flexible and able to handle multiple inputs from a variety of sources and suited to applications where the influent is pumped; The dikes or embankments for flood protection should be implemented around the boundaries of earthwork areas. Temporary ditches should be provided to facilitate the runoff discharge into an appropriate watercourse, through a silt/sediment trap. The silt/sediment traps should be incorporated in the permanent drainage channels to enhance deposition rates; | To minimize water quality impact from construction site runoff and general construction activities | Contractor | All construction sites where applicable | Construction stage | Water Pollution Control Ordinance ProPECC PN1/94 TM-EIAO TM-DSS |
| | | • The design of efficient silt removal facilities should be | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|----------------------|-------------------------|---|
| | | based on the guidelines in Appendix A1 of ProPECC PN 1/94. The detailed design of the sand/silt traps should be undertaken by the contractor prior to the commencement of construction; | | | | | |
| | | Construction works should be programmed to minimize surface excavation works during the rainy seasons (April to September). All exposed earth areas should be completed and vegetated as soon as possible after earthworks have been completed. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means; | | | | | |
| | | All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rainstorms. Deposited silt and grit should be removed regularly and disposed of by spreading evenly over stable, vegetated areas; | | | | | |
| | | If the excavation of trenches in wet periods is necessary, it should be dug and backfilled in short sections wherever practicable. Water pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities; | | | | | |
| | | All open stockpiles of construction materials (for example, aggregates, sand and fill material) should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system; | | | | | |
| | | Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-------------------------|----------------------|-------------------------|---|
| | | directed into foul sewers; | | | | | |
| | | Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarized in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events; | | | | | |
| | | All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facilities should be provided at every construction site exit where practicable. Wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains; | | | | | |
| | | Oil interceptors should be provided in the drainage system downstream of any oil/fuel pollution sources. The oil interceptors should be emptied and cleaned regularly to prevent the release of oil and grease into the storm water drainage system after accidental spillage. A bypass should be provided for the oil interceptors to prevent flushing during heavy rain; | | | | | |
| | | Construction solid waste, debris and rubbish on site should be collected, handled and disposed of properly to avoid water quality impacts; | | | | | |
| | | All fuel tanks and storage areas should be provided with locks and sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled fuel oils from reaching water sensitive. | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|-------------------------|---|
| | | Regular environmental audit on the construction site should be carried out in order to prevent any malpractices. Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the water bodies, mangroves and open sea. | | | | | |
| S5.4.3 | W2 | Sewage from workforce Portable chemical toilets and sewage holding tanks are recommended for handling the construction sewage generated by the workforce. A licensed contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance; Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the Project; Regular environmental audit on the construction site should be conducted in order to provide an effective control of any malpractices and achieve continual improvement of environmental performance on site. | To minimize water quality from sewage effluent in construction phase | Contractor | All construction sites where practicable | Construction stage | Water Pollution Control Ordinance TM-DSS |
| S5.4.3 | W3 | Construction Works and Bridge Works near Tung Chung Stream • Use precast structures or other similar approaches | To prevent any construction works in river and avoid any direct water quality impact to Tung Chung Stream | Contractor | All construction sites where practicable | Construction stage | • ProPECC PN1/94 |
| S5.4.3 | W4 | Construction Works of Sewage Pumping Stations A buffer zone of about 20m or about 30m will be zoned to | To avoid any direct water quality impact to Tung Chung Stream | | All construction sites where | Construction stage | • ProPECC PN1/94 |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|-------------------------|---|
| | | prevent any construction works near river. | | | practicable | | |
| S5.4.3 | W5 | Construction Work of Fresh Water and Salt Water Reservoirs Good site management as stipulated in ProPECC PN1/94 will be fully implemented to avoid polluted liquid or solid wastes from falling into the river waters or drainage. | To avoid water quality impact | Contractor | All construction sites where practicable | Construction stage | • ProPECC PN1/94 |
| S5.4.3 | W6 | Construction of Storm Water Management Facilities and Polder Scheme Good site management as stipulated in ProPECC PN1/94 will be fully implemented to avoid polluted liquid or solid wastes from falling into the river waters or drainage. | To avoid any direct water quality impact to Tung Chung Stream | | All construction sites where practicable | Construction stage | • ProPECC PN1/94 |
| S5.4.3 | W7 | Groundwater and Runoff for Tunnel Works • Cut-and-Cover method for the underpass at Road D1 in Tung Chung East to minimise the intrusion of groundwater. Good site management as stipulated in ProPECC PN1/94 will be fully implemented to avoid polluted liquid or solid wastes from falling into the river waters or drainage. | To avoid water quality impact | Contractor | All construction sites where practicable | Construction stage | • ProPECC PN1/94 |
| S5.5.8 | W8 | Good Management Practice in Construction Phase The following good site management practices shall be adopted for the filling works: Water quality monitoring shall be implemented to ensure effective control of water pollution and recommend additional mitigation measures required; The decent speed of grabs shall be controlled to minimize the seabed impact and to reduce the volume of overdredging; A perimeter silt curtain shall be installed during the entire | To avoid water quality impact | Contractor | All construction sites where practicable | Construction stage | • ProPECC PN1/94 |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|-------------------------|--|-------------------------|---|
| | | reclamation periods; | | | | | |
| | | Barges or hoppers shall not be filled to a level which will cause overflow of materials or pollution of water during loading or transportation; | | | | | |
| | | Excess materials shall be cleaned from the decks and exposed fittings of barges before the vessels are moved; | | | | | |
| | | Plants should not be operated with leaking pipes and any pipe leakages shall be repaired quickly; | | | | | |
| | | Adequate freeboard shall be maintained on barges to reduce the likelihood of decks being washed by wave action; | | | | | |
| | | All vessels should be sized so that adequate clearance is maintained between vessels and the seabed in all tide conditions, to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash; and | | | | | |
| | | • The works shall not cause foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the works site. | | | | | |
| S5.5.8 | W9 | The recovered C&D materials for filling would be ensured no floating or non-inert material by visual inspection, quality assurance, etc. | To avoid water quality impact | Contractor | All construction sites where practicable | Construction stage | • Waste Disposal Ordinance |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-------------------------|---|-------------------------|---|
| Water Qu | ality (Opera | tional Phase) | | | | | |
| S5.6.10 | W10 | The following mitigation measures will be implemented to TCV East, North and West SPS, upgraded CMRSPS, proposed TCE West SPS and TCE East SPS 100% standby pump capacity with spare pump of 50% pump capacity Dual-feed power supply Wet well storage providing up to 6-hours ADWF capacity (equivalent to about 4 hours of response time during peak flow condition); and Emergency communication mechanism amongst relevant government departments. | To prevent the impact due to the emergency discharge at TCW and TCE | | Proposed Sewage Pumping Station at TCW and TCE | Operational Stage | • DSD's Sewerage Manual |
| S5.6.10 | W11 | The following mitigation measures will be implemented to gravity sewers and rising mains Adopt high density polyethylene (HDPE) pipe for proposed gravity sewers and rising mains. Further protection on proposed rising mains with concrete surround will be provided to mitigate the risk of bursting. | To minimize the risk of bursting and hence bursting discharge from gravity sewers and rising mains | DSD | Proposed rising mains within TCE and TCW | Operational Stage | - |
| S5.6.10 | W12 | Maintenance Dredging for the Proposed Marina Silt curtain should be deployed to reduce the sediment dispersion from the dredging inside the marina. | To reduce the sediment dispersion | Future operator | Proposed marina at TCE | Operational Stage | - |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|-------------------------|---|
| Sewage d | and Sewerag | e Treatment Implications | | | | | |
| S6.5.4 | SS1 | Emergency Discharge of Proposed TCV West SPS, TCV East SPS, TCV North SPS and Upgraded CMRSPS The following mitigation measures will be implemented to TCV East, North and West SPS, and upgraded CMRSPS: 100% standby pumping capacity within each SPS, with spare pump up to 50% pumping capacity stockpiled in each SPS for any emergency use Twin rising mains Dual-feed power supply Emergency storage facilities up to 6-hours ADWF capacity; and Emergency communication mechanism amongst relevant government departments. | To prevent the impact due to the emergency discharge at TCW | DSD | Proposed Sewage Pumping Station at TCW | Operational stage | N/A |
| S6.5.4 | SS2 | Emergency Discharge of Proposed TCE West SPS and TCE East SPS In order to minimize the impact due to the emergency discharge, the following precautionary measures shall be included in the design of sewage pumping station: 100% standby pumping capacity within each SPS, with spare pump up to 50% pumping capacity stockpiled in each SPS for any emergency use Twin rising mains Dual-feed power supply Emergency storage facilities up to 6-hours ADWF capacity; and Emergency communication mechanism amongst relevant | To minimize the impact due to the emergency discharge at TCE | DSD | Proposed Sewage Pumping Station at TCE | Operational stage | N/A |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|----------------|---|-------------------------|---|
| | | government departments. | | | | | |
| S6.5.4 | SS3 | The following mitigation measures will be implemented to prevent pipe bursting on Rising Mains within TCE and TCW: • Strong pipe – use HDPE pipe with welded joints • Concrete encasement – concrete surround all rising mains | To minimize the risk of bursting and hence bursting discharge from gravity sewers and rising mains | | Proposed rising mains within TCE and TCW | | N/A |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-------------------------|------------------------|-------------------------|---|
| Waste Mo | anagement (| Construction Waste) | | | | | |
| S7.4.1 | WM1 | Good Site Practices The following good site practices are recommended throughout the construction activities: nomination of an approved personnel, such as a site manager, to be responsible for the implementation of good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; training of site personnel in site cleanliness, appropriate waste management procedures and concepts of waste reduction, reuse and recycling; provision of sufficient waste disposal points and regular collection for disposal; imposition of penalty system on Contractors' improper behaviours when illegal dumping and landfilling outside their respective construction sites, i.e. on nearby farmlands and riverbanks, are reported; appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors; and the contractor should prepare a Waste Management Plan (WMP) as part of the Environmental Management Plan (EMP) in accordance with the ETWB TC(W) No. 19/2005 for construction phase. The EMP should be submitted to the Engineer for approval. Mitigation measures proposed in the EIA Report and the EM&A | Minimize generation during construction | Contractor | All construction sites | Construction stage | • Waste Disposal Ordinance |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|------------------------|-------------------------|---|
| S7.4.1 | WM2 | Waste Reduction Measures Waste reduction is best achieved at the planning and design phase, as well as by ensuring the implementation of good site practices. The following recommendations are proposed to achieve reduction: segregate and store different types of waste in different containers, skip or stockpiles to enhance reuse or recycling of materials and their proper disposal; proper storage and site practices to minimize the potential for damage and contamination of construction materials; plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste; sort out demolition debris and excavated materials from demolition works to recover reusable/recyclable portions (i.e. soil, broken concrete, metal etc.); provide training to workers on the importance of appropriate waste management procedures, including waste reduction, reuse and recycling. | Reduce waste generation | Contractor | All construction sites | Construction stage | • Waste Disposal Ordinance |
| S7.4.1 | WM3 | Storage of Waste The following recommendation should be implemented to minimize the impacts: waste such as soil should be handled and stored well to ensure secure containment; and Depends on actual site activities, certain locations within the site area would be used for storage of waste to enhance reuse. However, there would not be any designated location for storage of waste, and the storage locations would need to be adjusted to suite actual site conditions; | Good site practice to minimize the waste generation and recycle the C&D materials as far as practicable so as to reduce the amount for final disposal | | All construction sites | Construction stage | Land (Miscellaneous Provisions) Ordinance Waste Disposal Ordinance ETWB TCW No. 19/2005 |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|------------------------|-------------------------|--|
| S7.4.1 | WM4 | Collection and Transportation of Waste The following recommendation should be implemented to minimize the impacts: • remove waste in timely manner; • employ the trucks with cover or enclosed containers for waste transportation; • obtain relevant waste disposal permits from the appropriate authorities; and • disposal of waste should be done at licensed waste disposal facilities. | Minimize waste impacts from storage | Contractor | All construction sites | Construction stage | Waste Disposal Ordinance |
| S7.4.1 | WM5 | Excavated and C&D Materials Wherever practicable, C&D materials should be segregated from other wastes to avoid contamination and ensure acceptability at public fill reception facilities or reclamation sites. The following mitigation measures should be implemented in handling the excavated and C&D materials: maintain temporary stockpiles and reuse excavated fill material for backfilling; carry out on-site sorting; make provisions in the Contract documents to allow and promote the use of recycled aggregates where appropriate; and implement a trip-ticket system for each works contract to ensure that the disposal of C&D materials are properly documented and verified, so as to avoid the illegal dumping and landfilling of C&D materials on farmlands/ riverbanks at TCW; The recommended C&D materials handling should include: | Minimize waste impacts from excavated and C&D materials | Contractor | All construction sites | Construction Stage | Land (Miscellaneous Provisions) Ordinance Waste Disposal Ordinance ETWB TCW No. 19/2005 Project Administrative Handbook for Civil Engineering Works, 2012 Edition |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|---|-------------------------|---|
| | | On-site sorting of C&D materials | | | | | |
| | | Reuse of C&D materials | | | | | |
| | | Use of Standard Formwork and Planning of Construction Materials purchasing | | | | | |
| S7.4.1 | WM6 | Provision of Wheel Wash Facilities Wheel wash facilities have to be provided at the site entrance before the trucks leaving the works area. Dust disturbance due to the trucks transportation to the public road network could be minimized by such arrangement. | Minimize waste impacts from trucks transportation | Contractor | All construction sites | Construction Stage | N/A |
| \$7.4.1 | WM7 | Excavated Contaminated Soil As a precaution, it is recommended that standard good site practice should be implemented during the construction phase to minimize any potential exposure to contaminated soils or groundwater. | Remediate contaminated soil | Contractor | All construction sites where applicable | Construction stage | • Practice Guide for Investigation and Remediation of Contaminated Land |
| S7.4.1 | WM8 | Excavated Marine Sediments Reference has been made to the sediment testing results. Possible mitigation measures to handle the contaminated/uncontaminated sediment are summarized as follows. All construction plant and equipment shall be designed and maintained to minimise the risk of silt, sediments, contaminants or other pollutants being released into the water column or deposited in the locations other than designated location. All vessels shall be sized such that adequate draft is maintained between vessels and the sea bed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash. Adequate freeboard shall be maintained on barges to | Handle excavated sediment | Contractor | All construction sites where applicable | Construction stage | • ETWB-TCW 34/2002 |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-------------------------|---|-------------------------|---|
| | | ensure that decks are not washed by wave action. | | | | | |
| S7.4.1 | WM9 | Dumping of excavated sediment Keep and produce logs and other records to demonstrate compliance and ensure journeys are consistent with designated locations Comply with the conditions in the dumping permit. All bottom dumping vessels (hopper barges) shall be fitted with tight fittings seals to their bottom openings to prevent leakage of material. The excavated sediment shall be placed into the disposal pit by bottom dumping. Contaminated marine mud shall be transported by split barge of not less than 750m³ capacity and capable of rapid opening and discharge at the disposal site. Discharge shall be undertaken rapidly and the hoppers shall be closed immediately. Sediment adhering to the sides of the hopper shall not be washed out of the hopper and the hopper shall remain closed until the barge returns to the disposal site. For Type 3 special disposal treatment, sealing of contaminant with geosynthetic containment before dropping into designated mud pit. A geosynthetic containment method is a method whereby the sediments are sealed in geosynthetic containers and, the containers would be dropped into the designated contaminated mud pit where they would be covered by further mud disposal and later by the mud pit capping at the disposal site, thereby fulfilling the requirements for fully confined mud disposal. | Handle excavated sediment | Contractor | All construction sites where applicable | Construction stage | • ETWB-TCW 34/2002 |
| S7.4.1 | WM10 | <u>Chemical Waste</u> | Control the chemical waste and ensure proper | Contractor | All construction | Construction stage | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved | | |
|-------------|--------------------------------------|--|---|-------------------------|--|-------------------------|--|--|--|
| | | If chemical wastes are produced at the construction site, the Contractors should register with EPD as chemical waste producer. Chemical wastes should be stored in appropriate containers and collected by a licensed chemical waste collector. Chemical wastes (e.g. spent lubricant oil) should be | storage, handling and disposal. | | sites | | (Chemical Waste) General) Regulation | | |
| | | recycled at an appropriate facility as far as possible, while the chemical waste that cannot be recycled should be disposed of at either the Chemical Waste Treatment Centre, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation. | | | | | • Code of Practice on the Packaging, Labelling and Storage of Chemical Waste | | |
| S7.4.1 | WM11 | General Refuse General refuse should be stored in enclosed bins separately from construction and chemical wastes. Recycling bins should also be placed to encourage recycling. | Minimize production of the general refuse and avoid odour, pest and litter impacts | | All construction sites | Construction stage | Waste Disposal Ordinance | | |
| | | Preferably enclosed and covered areas should be provided for general refuse collection and routine cleaning for these areas should also be implemented to keep areas clean. A reputable waste collector should be employed to remove general refuse on a daily basis. | | | | | | | |
| S7.4.1 | WM12 | Floating Refuse accumulated along the seawall The floating refuse along seawall should be collected to avoid accumulation. In addition, proper seawall design should be employed, and regular checking and cleaning of floating refuse should be implemented. | Control floating refuse and ensure proper disposal | Contractor | Construction sites along seawall | Construction stage | Waste Disposal Ordinance | | |
| Waste Ma | Vaste Management (Operational Waste) | | | | | | | | |
| S7.4.2 | WM13 | Illegal dumping and landfilling | Prevent waste from | Relevant | All | Operational stage | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|------------------------------------|------------------------|-------------------------|---|
| | | As a Development Permission Area (DPA) plan will be issued by the Town Planning Board as a temporary measure before the formal Outline Zoning Plan (OZP) for Tung Chung New Town Extension is adopted, statutory right to guide and control the development and use of land would be authorised. Should there be illegal dumping and landfilling observed/ reported on nearby farmlands and riverbanks, the government authority should take all necessary actions including but not limited to prosecution to remediate the circumstances. | illegal dumping and landfilling | government departments | construction | | |
| \$7.4.2 | WM14 | Municipal Solid Waste A reputable waste collector should be employed to remove general refuse on a daily basis. A 4-bin recycling system for paper, metals, plastics and glass should be adopted together with a general refuse bin. They should be placed in prominent places to promote waste separation at source. All recyclable materials should be collected by recyclers. | Remove general refuse generated from the proposed development | FEHD/ Relevant Operators | All construction sites | Operational stage | Waste Disposal Ordinance |
| S7.4.2 | WM15 | Chemical Waste Localized chemical waste storage areas should be located close to the source of waste generation for temporary storage. Drum-type containers with proper labelling should be used to collect chemical wastes for storage at the designated areas. A licensed collector should be employed for the chemical waste collection and the chemical wastes | Reduce chemical waste due to waste handling | Contractors/ Relevant Operators | All construction sites | Operational stage | |
| | | chemical waste collection and the chemical wastes should be disposed at an appropriate facility, such as Chemical Waste Treatment Centre (CWTC) in Tsing Yi. Collection receipts issued by the licensed collector showing the quantities and types of chemical waste taken off-site and details of the treatment facility should be kept for record. | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|----------------|----------------------|-------------------------|---|
| S7.4.2 | WM16 | Floating Refuse accumulated along seawall The floating refuse along seawall should be collected to avoid accumulation. | Control floating refuse and ensure proper disposal | | Along seawall | Operational stage | Waste Disposal Ordinance |
| S7.4.2 | WM17 | Floating Refuse inside Marina • Floating refuse at the marina will be collected and disposed by the licensed waste collector and as required. | Reduce floating refuse washing up onto marina by currents and wind | - | Marina | Operational stage | Waste Disposal Ordinance |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|--|---------------------------------|--|
| Land Con | tamination | | | | | | |
| S8.4.1 | LCI | Undertaking environmental Site Inspection (SI) for all potentially contaminated sites as listed in the Contamination Assessment Plan (CAP). | contamination potential before the | | All potentially contaminate d sites as listed in the CAP | Prior to the construction stage | Annex 19 of the TM-EIAO, Guidelines for Assessment of Impact On Sites of Cultural Heritage and Other Impacts (Section 3 : Potential Contaminated Land Issues); Guidance Manual for Use of Risk-Based Remediation Goals (RBRGs) for Contaminated Land Management; Guidance Notes for Contaminated Land Assessment and Remediation; and Practice Guide for Investigation and Remediation of Contaminated Land |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|-------------------------|--|---------------------------------|---|
| | | | | | | | • Recommendation s in Health Risk Assessment |
| S8.4.2 | LC2 | Re-appraisal would be required for the surveyed sites, other remaining areas of the PDAs and the works areas for the associated infrastructures because the development of these sites/ areas would only commence a number of years later, which may allow changes in the land usage of these sites and may give rise to potential land contamination issues. The Project Proponent's appointed consultant would prepare a supplementary CAP presenting the findings of the reappraisal and strategy of the recommended SI, if required, and submit to EPD for review and approval. | J 1 | | All the surveyed sites as listed in the CAP, other remaining areas of the PDAs and works areas for the associated infrastructur es | Prior to the construction stage | Ditto |
| S8.5 | LC3 | After approval of the supplementary CAP and upon completion of the SI works, the PP should prepare and submit a Contamination Assessment Report (CAR) for all potentially contaminated sites listed in the CAP to EPD for agreement. | Present the findings of SI and evaluate the level and extent of potential contamination | | All the surveyed sites as listed in the CAP, other remaining areas of the PDAs and works areas for the associated infrastructures | Prior to the construction stage | Ditto |
| S.8.5 | LC4 | Preparation and submission of Remediation Action Plan (RAP) to EPD for agreement if land contamination is confirmed. | Recommend appropriate mitigation measures for the contaminated soil and groundwater identified in the | Detailed Design | All the surveyed sites as listed in the CAP, other remaining | Prior to the construction stage | Ditto |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|---------------------------------|---|---------------------------------|---|
| | | | assessment if remediation is required | | areas of the PDAs and works areas for the associated infrastructu res | | |
| S.8.5 | LC5 | Preparation and submission of Remediation Report (RR) to EPD for agreement. | Demonstrate that the decontamination work is adequate and is carried out in accordance with the endorsed CAR and RAP | Detailed Design Consultant / | All the surveyed sites as listed in the CAP, other remaining areas of the PDAs and works areas for the associated infrastructures | Prior to the construction stage | Ditto |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-------------------------|---|-------------------------|---|
| Ecology | (Design Ph | ase) | | | | | |
| S9.8.1 | EC1 | Development under the Project have avoided all the recognised sites of conservation importance, including Country Parks, | To protect the recognised sites of conservation importance and habitats inside | PlanD | TCW | RODP | Not available |
| S9.8.1 | EC2 | About 30m buffer zone at the two main branches and the joined outlet section of Tung Chung Stream; and about 20m buffer for the major tributary at Ngau Au of Tung Chung Stream | To protect the Tung Chung Stream | PlanD | Tung Chung Stream | RODP | Not available |
| S9.8.2 | EC3 | Detailed designs should avoid the encroachment of important habitats (e.g. Fung Shui Wood) within the Project Site | To protect the important habitats within Project Site | PlanD | TCW | Design Phase | Not available |
| S9.8.2 | EC4 | Detailed designs of noise barriers to prevent bird collision | To prevent bird collision | HyD | Noise barriers | Design Phase | • Guidelines on Design of Noise Barriers |
| S9.8.2 | EC5 | Measures and suitable designs of sewage pumping stations to prevent emergency discharge accidents in TCE and TCW 100% standby pumping capacity within each SPS, with spare pump up to 50% pumping capacity stockpiled in each SPS for any emergency use Twin rising mains Dual-feed power supply Emergency storage facilities up to 6-hours ADWF capacity; and Emergency communication mechanism amongst relevant government departments. | To protect the water bodies from impacts due to emergency discharge in TCE and TCW | DSD | Proposed and Upgraded Sewage pumping stations at TCE and TCW | Design Phase | • DSD standards |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|---|---|---|--|
| Ecology (| Construction | on Phase) | | | | | |
| S9.8.2 | EC6 | Adoption of non-dredged reclamation method | To maintain the marine water quality | Contractor | Reclamation area of TCE and Road P1 | Construction phase | • EIA • Contractual requirements |
| S9.8.3 | EC7 | Compensation woodland planting | To compensate loss of woodland, fung shui wood and orchard | Contractor | Uphill of Sheung Lei Pai FSW and Tung Chung Road | Construction phase | EIA Contractual requirements |
| S9.8.3 | EC8 | Planting of emergent plant | To provide habitats for this Jhora Scrub Hopper, and to compensate the loss of their habitats (wet abandoned agricultural land) in northern section of Fong Yuen | DSD / Contractor | Inside the future River Park | Construction phase | EIA Contractual requirements |
| S9.8.3 | EC9 | Capture-and-translocation exercise | Minimize the potential impact to amphibian species of conservation importance including Romer's Tree Frog and Chinese Bullfrog due to site formation | For public works, provided by the government departments responsible for the construction of those public works or the site formation works. For TCV-1 and | Public works near the eastern branch of Tung Chung Stream, in particular 1) the River Park, 2) the Distributor Road along | Capture-and- translocation exercise before commencement of site formation | EIA Contractual requirements Explanatory statement of the OZP (for private lots) |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|---|--|---|---|
| | | | | TCV-5, where the lands within mostly belong to private lots, the future project proponents of those private lots, via the established mechanism for land transaction application. | branch of Tung Chung Stream, 3) the road | | |
| S9.8.3 | EC10 | Preservation and/or Transplantation of plant species of conservation importance and the following monitoring of preserved/transplanted plant individuals | Protection of plant species of conservation importance | For public works, provided by the government departments responsible for the construction of those public works or the site formation works. | Within construction sites All areas for public works Also be required in private lands | For preservation and/or transplantation, before commencement of site formation. | Contractual requirements |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|---|---|---|---------------------------------------|---|
| | | | | For TCV-1, where the lands within mostly belong to private lots, the future project proponents of those private lots, via the established mechanism for land transaction application. | in TCV-1. | | |
| S9.8.3 | EC11 | Defining and maintaining construction site boundaries (including erection of site hoarding, fences etc.) | Screen construction disturbance to the nearby habitats | Contractor | Along the boundary of construction sites and buffer zones of Tung Chung Streams, along the boundary of mature woodland and Fung Shui Wood, and along the boundary between TCV-6 and the middle section of Fong Yuen | Before commencement of site formation | • EIA • Contractual requirements |
| S9.8.3 | EC12 | Protection of Tung Chung Stream | Minimize the potential water pollution due to | Contractor | Within construction | Construction | • EIA |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|---|--------------------------------------|---|
| | | | construction of road crossings or other works near Tung Chung Stream | | sites | phase | • Contractual requirements |
| S9.8.3 | EC13 | Implementation of standard site practices | Minimize the potential impact due to dust, noise and runoff during construction phase | Contractor | Within construction sites | Construction phase | • EIA • Contractual requirements |
| S9.8.4 | EC14 | Adopting Eco-shoreline design | To mitigate the impact of the marine loss | CEDD | Along future seawall | Construction stage | • EIA • Contractual requirements |
| S9.8.4 | EC15 | Strict enforcement on no-dumping | Minimise the potential impact to marine habitats | Contractor | In reclamation area as well as all works area and travel route of works vessels | Before and during construction phase | • EIA • Contractual requirements |
| S9.8.4 | EC16 | Spill response plan | Minimise the potential impact to marine habitats | Contractor | In reclamation area as well as all works area and travel route of works vessels | Before and during construction phase | • EIA • Contractual requirements |
| S.9.8.4 | EC17 | Control and minimization of marine traffic by including using larger-sized barges, land transportation of materials, reuse of excavation and C&D materials and speed limits & | Reduce marine traffic | Contractor | In reclamation area as well | Construction phase | • EIA • Contractual |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|--|---|---|--|
| | | regular routes of works vessels | | | as all works area and travel route of works vessels | | requirements |
| S9.8.4 | EC18 | Dolphin exclusion zone and dolphin watching plan | Protection of CWD | Contractor | In reclamation area as well as all works area | Construction phase | • EIA • Contractual requirements |
| S9.8.4 | EC19 | Speed limits and regular routes of works vessels; Prepare and submit a "Works Vessel Travel Route Plan" | Protection of CWD | Contractor | In reclamation area as well as all works area | Construction phase | • EIA • Contractual requirements |
| S9.11.1 | EC20 | Monitoring of compensatory planting woodland | Monitor the survival of trees and establishment of the woodland | CEDD/ Contractor | Areas of compensator y woodland planting | Quarterly for 3 years after completion of planting works | • EIA • Contractual requirements |
| S9.11.1 | EC21 | Monitoring of translocated amphibians | Monitor the effectiveness of the translocation programme | Public works: Responsible government departments / Contractor Private lots: Private developers | Release sites for translocated amphibians | After translocation exercise. At least three surveys in each release site during the breeding season, preferably monthly between April and June, | EIA Contractual requirements Explanatory statement of the OZP (for private lots) |
| S9.11.1 | EC22 | Monitoring of preserved / transplanted plant species | Monitor and evaluate | Public works: | Construction | After | • EIA |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|--|---|---|---|
| | | | the effectiveness of the preservation and transplantation programme. | Responsible government departments / Contractor Private lots: Private developers | sites for preserved plants; recipient sites for transplanted plants | transplantation or preservation. For transplanted individuals, for two years, monthly for the first year, and then quarterly for the second year. For the preserved individuals, monthly throughout the construction. | requirements |
| S9.11.1 | EC23 | Monitoring of Tung Chung Stream and Wong Lung Hang Stream EISs | Protect the EISs | Contractor | Tung Chung Stream and Wong Lung Hang Stream | Construction phase and post- construction phase | • EIA • Contractual requirements |
| 9.11.2 | EC24 | Monitoring of Tung Chung Bay and Tai Ho Wan | Protect Tung Chung Bay and Tai Ho Wan | Contractor | Tung Chung Bay and Tai Ho Wan | Construction phase and post- construction phase | • EIA • Contractual requirements |
| Ecology (| Operationa | l Phase) | | | | | |
| S9.11.1 | EC25 | Monitoring of emergent plant inside River Park | Monitor the survival of emergent plant | DSD/ Contractor | Three months after completion of planting in future River Park | Quarterly for 2 years after completion of planting works | EIA Contractual requirements |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---------------------------------|--|-------------------------|--|-------------------------|---|
| 9.11.2 | EC26 | Eco-shoreline monitoring | Monitor the colonisation and establishment of fauna and/or flora, water quality, and recruitments of fisheries species | CEDD/ Contractor | Eco- shoreline at TCE PDA reclamation | phase twice in | • EIA • Contractual requirements |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|---|-------------------------|---------------------------------|--|---|
| Fisheries | S | | | | | | |
| S10.8 | F1 | Good Site Practices | To protect the fisheries resources | Contractor | In reclamation area | Construction phase | • EIA • Contractual requirements |
| S10.8 | F2 | No dumping | To protect the fisheries resources | Contractor | In reclamation area | Construction phase | • EIA • Contractual requirements |
| S10.8 | F3 | Spill response plan | To protect the fisheries resources | Contractor | In reclamation area | Construction phase | • EIA • Contractual requirements |
| S10.9 | F4 | Follow the mitigation measures proposed in the water quality assessment for the construction and operation phases of the project. | To protect the fisheries resources | Contractor | Waters in Northern Lantau | Construction phase and operation phase | |
| S10.9 | F5 | Follow the mitigation measure of eco-shoreline in ecology chapter for the construction and operation phases of the project. | To enhance the fisheries resources | Contractor | Eco- shorelines | Construction phase and operation phase | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|--------------|-----------------|---|--|---|---|--|---|
| Landsca | pe and Visua | al (Construction Phase) | | | | | |
| S11.7 MM1 | LV1 | Optimisation of Construction Areas & Providing Temporary Landscape on Temporary Construction — Construction areas' control shall be enforced, where possible, to ensure that the landscape and visual impacts arising from the construction activities are minimised. It includes reduction of the extent of working areas and temporary works areas, management on storing and using the construction equipment and materials, and consideration of detailed schedules to shorten the construction period. Temporary landscape treatments are considered to be adopted such as applying hydro-seeding on temporary stockpiles and reclamation areas to alleviate the potential impacts. | Minimise the landscape and visual impacts arising from the construction activities | Relevant Government Departments / Private Sector | Through-out Tung Chung West (TCW) area and Tung Chung East (TCE) area | Construction Phase | |
| S11.7 MM2 | LV2 | Minimize Topographical Change – The footprint of construction elements and temporary works areas should be optimised to reduce topographical/landform changes, as well as reduce land take and interference with natural terrain. Where there is a need to significantly cut into the existing landform, retaining walls and cut slopes should be considered as appropriate. To minimize landform changes and land resumption, earthworks and engineered slopes should be designed to be a visually interesting, compatible with the surrounding landscape and to mimic the natural contouring and terrain as appropriate. | Reduce topographical changes and minimize land resumption | Relevant Government Departments / Private Sector | Through-out TCW area | Prior to Construction & Construction Phase | • GEO Publication No/1/2011, Technical Guidelines on Landscape Treatment for Slopes |
| S11.7 MM3 | LV3 | Preservation of Potentially Registerable OVTs, Rare and Protective Vegetation – Exiting trees to be retained within the Project Site should be carefully protected during construction. In particular Potentially Registerable OVTs are considered to be preserved according to ETWB | Protect and Preserve Trees | Relevant Government Departments / Private Sector | Onsite, particularly for TCW area | Prior to Construction & Construction Phase | • ETWB TC(W) No.29/2004 and DEVB TC(W) |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|--------------|-----------------|--|--|--|---|--|---|
| | | Technical Circular (Works) No. 29/2004. Rare and Protective Vegetation shall be protected following Forestry Regulations (Cap.96) and Protection of Endangered Species of Animals and Plants Ordinance (Cap.586). Detailed Tree Protection Specification shall be provided in the Contract Specification according to DEVB TCW No. 10/2013 Tree Preservation. Following DEVB (GLTM) Guidelines for Tree Preservation during Development, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. A detailed tree survey will be carried out for the Tree Removal Application (TRA) process which will be carried out at the later detailed design stage of the Project. The detailed tree survey will propose which trees should be retained, transplanted or felled and will include details of tree protection measures for those trees to be retained. | | | | | No.10/2013. • Greening, Landscape and Tree Management Section (GLTM) of the Development Bureau, Guidelines on Tree Preservation during Development (April, 2015) |
| S11.7 MM4 | LV4 | Transplanting of Existing Trees – Trees unavoidably affected by the Project works should be transplanted where practical. Trees should be transplanted straight to their final receptor locations within the site and not held in a temporary nursery as far as possible. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, where applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme. A detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with DEVB TCW 10/2013 and LAO PN 7/2007 and final locations of transplanted trees should be agreed prior to commencement of the work. For trees associated with highways e.g. roadside planting | Transplant Trees where suitable for transplantation | Relevant Government Departments / Private Sector | Onsite where possible, otherwise consider offsite locations | Prior to Construction & Construction Phase | DEVB TC(W) No.10/2013 and LAO PN7/2007 HyD HQ/GN/13 Interim Guidelines for Tree Transplanting Works under Highways Department's Vegetation Maintenance |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|--------------|-----------------|---|--|---|-------------------------------------|--|---|
| | | along highways, that are unavoidably affected and should be transplanted. HyD HQ/GN/13 'Interim Guidelines for Tree Transplanting Works under Highways Department's Vegetation Maintenance Ambit' should be referred to. | | | | | Ambit GLTM of the Development Bureau, Guidelines on Tree Preservation during Development (April, 2015) |
| S11.7 MM5 | LV5 | Screen hoarding — To reduce negative visual impact, construction site hoarding should be erected around the site to screen pedestrian level views into the construction area from visual sensitive receivers. Hoarding design should consider greening measures such as colour and form should be adopted to improve its visual appearance. | To screen undesirable views of the work site. | Relevant Government Departments / Private Sector | Through-out TCW and TCE areas | Construction Phase | |
| S11.7 MM6 | LV6 | Adopting Non-dredge Method for the Reclamation – In order to minimize the potential adverse impacts caused by the reclamation, a number of alternative construction methodologies has been critically examined. After considering all the options such as fully dredged, partially dredged and non-dredged methods for seawall construction and reclamation, non-dredged method for both the seawall construction and reclamation are recommended so as to minimize the generation of dredged sediment. | Minimize the potential adverse impacts caused by the reclamation | Relevant Government Departments / Private Sector | Through-out TCE area | Construction Phase | • Foreshore and Sea-bed (Reclamations) Ordinance (Cap.127) |
| S11.7 MM7 | LV7 | Protection of Natural Rivers and Streams – For all the natural rivers and streams inside the development area, in accordance with ETWB TCW 5/2005, consideration of protection measures should be made to minimize any impacts from the construction works, especially those | Protection of Natural Rivers and Streams Minimize the impacts from the construction works | Relevant Government Departments / Private Sector | Through-out TCW area | Prior to Construction & Construction Phase | EPD ProPECC PN1/94 Construction Site Drainage. DSD Technical |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|--------------|-----------------|--|---|---------------------------------------|-----------------------|--|---|
| | | development near Tung Chung Stream. According to the latest RODP, a 30m buffer zone will be zoned as "CA". Precast structures or other similar approaches will be used to prevent / minimise any construction works in river and thus to avoid any direct water quality impact. Good site management as stipulated in ProPECC PN1/94 will be fully implemented to avoid polluted liquid or solid wastes from falling into the river waters. | | | | | Circular No. 2/2004. • ETWB TC(W) No.5/2005 Protection of natural streams/rivers from adverse impacts arising from construction works |
| S11.7 MM8 | LV8 | Preservation of Natural Coastline – The natural coastline along the proposed "RO" of the RODP in TCW should be preserved. The remaining natural shorelines in Tung Chung Bay including sandy shores close to the Tung Chung old pier will be conserved as a Waterfront Park according to the latest RODP. | Preservation of Natural Coastline | Relevant Government Departments | Onsite where possible | Prior to Construction & Construction Phase | |
| S11.7 MM9 | LV9 | Providing Natural Rock Material/ Planting for Artificial Seawall – There would be inevitable permanent losses of marine waters (seabed and water column), and direct impacts on existing artificial seawalls due to the reclamation. To minimize the impacts, the design of the future seawall like 'eco-shoreline' could be improved to provide high ecological functions and mitigate the impact of the loss. | Mitigate the impacts on existing artificial seawalls | Relevant Government Departments | Onsite where possible | Prior to Construction & Construction Phase | |
| | | An 'eco-shoreline' is any shoreline which provides beneficial functions to the local ecosystem through a range of active or passive solutions, whilst providing coastal protection. By means of using natural rock materials for artificial seawall and considering to introduce a native vegetation buffer directly behind the top of seawalls as appropriate to create habitat, shelter and a source of food | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|--|---|---|---|--|--|
| | | for benefiting both terrestrial and aquatic species along the foreshore, these measures can help to enhance the ecological functions and 'natural-look' of the shoreline, and the potential impacts will be mitigated. | | | | | |
| Landscap | e and Visua | d (Operational Phase) | | | | | |
| S11.7 MM10 | LV10 | Compensatory Planting – Compensatory planting for felled trees shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Removal Application process under DEVB TCW No. 10/2013 and LAO PN 7/2007. The location of compensatory planting is proposed at the potential open areas such as open spaces, amenity areas, open areas of the streetscapes including roadside planting, as well as the open areas within development lots. The species to be planted should be all native species, taken "Characteristics of Major Local Tree Species Propagated by AFCD" as a reference. A search of species to be planted will be conducted in a further detailed stage. | Compensate for trees and shrubs lost due to the Project | Relevant Government Departments / Private Sector | Onsite where possible, particular-ly for TCW area | Prior to Construction, Construction Phase & Maintenance in Operation Phase | DEVB TC(W) No.10/2013 and LAO PN 7/2007. GLTM of the Development Bureau, Guidelines on Tree Preservation during Development (April, 2015) |
| S11.7 MM11 | LV11 | Woodland Restoration – A search of area to mitigate the loss of woodland has been conducted. Priority has been given to the practicability of compensation of woodland within the boundary of RODP. Given the nature of the project is to provide development opportunities to satisfy the needs for the society in general and the aspirations of local communities, compensation of woodland is only possible for the areas beyond the RODP. It is considered that the areas adjoining the woodlands near the existing services reservoirs, and hillsides to the east of Tung Chung Road, would be suitable locations. The advantage of these locations is that there are existing woodlands immediately | Reprovide areas of woodland to compensate for those areas of quality woodland lost | CEDD/AFCD | In areas identified and as agreed with AFCD | Prior to Construction, Construction Phase & Maintenance in Operation Phase | DEVB Technical Circular Works 10/2013- Tree Preservation GLTM of the Development Bureau, Guidelines on Tree Preservation |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|--|--|---------------------------------------|--|--|---|
| | | downhill to the location and the Sheung Ling Pei Fung Shui Wood is further downhill behind Sheung Ling Pei Village, planting new woodland areas adjoining existing woodlands would form an ecological linkage and increase the overall habitat size, and hence would help to enhance the ecological and landscape values in the long run. | | | | | during Development (April, 2015) |
| | | It is noted that the compensation trees for landscape impacts will also be planted near the future service reservoirs. The tree species to be planted should be all native species for woodland compensation, and the two areas uphill to Sheung Ling Pei should also make reference to the existing tree species reported in Fung Shui Woods habitat. | | | | | |
| S11.7 MM12 | LV12 | Screen Planting – Tall screen/buffer trees and shrubs should be planted to screen proposed structures such as roads and buildings. This measure will form part of the compensatory planting and will improve compatibility with the surrounding environment and create a pleasant pedestrian environment. | To screen proposed structures Improve compatibility with the surrounding environment | Relevant Government Departments | Through-out the working sites of the TCW and TCE areas | Prior to Construction, Construction Phase & Maintenance in Operation Phase | • HyD HQ/GN/15— Guidelines for Greening Works along Highways. |
| S11.7 MM13 | LV13 | Roadside Planting – Roadside greening is proposed alongside all roads within the possible developments. It will enhance local identity, if theme planting is used, and reduce visual impact through screening. At-grade road planting should be considered along central dividers and on road islands e.g. in the middle of roundabouts. | Soften the hard, straight edges and provide greening along the roads; Improve the visual amenity | Relevant Government Departments | Along new roads, and On appropriate viaducts | Prior to Construction, Construction Phase & Maintenance in Operation Phase | HyD HQ/GN/15- Guidelines for Greening Works along Highways. Development Bureau Technical Circular Works No.2/2012 - Allocation of Space for Quality |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | - | Location | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---------------------------------|--|---|----------|-------------------------|---|
| | | | | | | | Greening on Roads |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|--|---|---------------------------------------|---|--|--|
| S11.7 MM14 | LV14 | Aesthetic Design of Built Development – The planning of the revised RODP has considered reducing potential visual impacts, enhancing visual amenity and keeping visual corridors. The proposed development will ensure the building massing is compatible with its surroundings. To improve visual amenity, natural building materials could be used on building facades. For example, stone and timber should be considered for architectural features; light earthy tone colours such as shades of green, shades of grey, shades of brown and off-white should be considered for the façade treatment to reduce the visibility of the development components. The form, textures, finishes and colours of the proposed development components should aim to be compatible with the existing surroundings. It would only be implemented for public developments/projects. | Improve visual amenity of the new buildings, keep visual corridors and integrate as possible into the surrounding landscape | Relevant Government Departments | Through-out the TCW and TCE areas | Prior to Construction, Maintenance in Operation Phase | Hong Kong Planning Standards and Guidelines (HKPSG) issued by the Planning Department (As at Aug 2011); PNAP APP- 152, Sustainable Building Design Guidelines |
| S11.7 MM15 | LV15 | Maximise Greening on Structures – The Government has been actively promoting greening in buildings and structures such as bridges to improve the environment. This includes actively implementing rooftop greening or vertical greening, as where practicable to enhance the cityscape and mitigate the heat island effect in urban areas. For the new built forms in TCW and TCE, it is considered the implementation of the following greening measures could alleviate the landscape and visual impacts of new development and help the development blend in with its surrounding landscape: • Sky Garden: Refuge floors or voids in building mass formed by partial removal of floor plates on certain building storeys or provision of freed up areas on certain building storeys provide opportunities for sky gardens for the proposed built development. It can allow views through the development to the background formed by the natural hillsides and | Maximise Greening coverage Enhance visual amenity, create visual corridors and integrate as possible into the surrounding landscape | Relevant Government Departments | On appropriate buildings and structures | Prior to Construction, Construction Phase & Maintenance in Operation Phase | Development Bureau Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects PNAP APP- 152, Sustainable Building Design Guidelines |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---|--|--------------------------|----------|-------------------------|---|
| | | enhance the visual amenity effectively. For public developments, relevant technical document Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects by Development Bureau in 2011 shall be referred to. For private developments, it is only applicable to sites with inadequate greening coverage and should be implemented in accordance with Sustainable Building Design Guidelines PNAP APP-152. | | | | | |
| | | • Green Roof: The Architectural Services Department completed the Study on Green Roof Application in Hong Kong in 2007 which reviewed the latest concepts and design technology of green roof and recommended technical guidelines suitable for application in Hong Kong. The study will be taken into account to the new buildings to be built in TCW and TCE. Landscape and visual impact can be alleviated and the landscape and visual value can be enhanced. For private development, it is only applicable to sites with inadequate greening coverage and should be implemented in accordance with Sustainable Building Design Guidelines PNAP APP-152. Relevant technical document Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects by Development Bureau in 2011 shall be reference. For public developments, relevant technical document Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects by Development Bureau in 2011 shall be referred to. For private developments, it is only applicable to sites with inadequate greening coverage and should be implemented in accordance with Sustainable Building Design Guidelines PNAP APP-152. | | | | | |
| | | Vertical Green: Planting of climbers to grow up | | | | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|---|---|--------------------------|---|--|--|
| | | vertical surfaces where appropriate (e.g. building edges), to soften hard structures and facilities. Relevant technical document Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects by Development Bureau in 2011 shall be observed. For public developments, relevant technical document Technical Circular (Works) No. 3/2012 Site Coverage of Greenery for Government Building Projects by Development Bureau in 2011 shall be reference. For private development, it is only applicable to sites with inadequate greening coverage and should be implemented in accordance with Sustainable Building Design Guidelines PNAP APP-152. • Greening on infrastructure: Planting could be provided on infrastructure such as bridges where appropriate to enhance greenery to soften its built edges. Screen planting could be provided near infrastructure to reduce any undesirable visual impacts. | | | | | |
| S11.7 MM16 | LV16 | Noise barrier design — The visual impact of noise mitigation measures will be mitigated by appropriate detailed design, including suitable combination of transparent and sound absorbent materials, appropriate colour selection of panels and supporting structures, or provision of at-grade planting of trees, shrubs and/or climbers camouflage to the barriers, as well as design of supporting structures to incorporate a high level of quality and aesthetics. A combination of transparent panels at top and solid panels at bottom would lighten the visual impact, and at the same time maintain the attractiveness by using colourful panels. The noise barriers would be implemented for District Distributor Roads and Local Distributor Roads at both TCE and TCW area. | Minimize the visual impact from the structures of noise barriers | HyD | Noise barriers within the TCW and TCE areas | Prior to Construction, Construction Phase & Maintenance in Operation Phase | GLTM of the Development Bureau's Guidelines on Greening of Noise Barriers (April 2012). Guidelines on Design of Noise Barriers by HyD and EPD in 2003 |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|--|--|--------------------------|--|--|--|
| S11.7 MM17 | LV17 | Landscape Treatment for Polders & Attenuation Ponds – There would be polders and attenuation ponds in TCW. While they are primarily used for receiving and treating surface runoff and alleviating the flood risk during heavy rainfall, the design of those has provided an opportunity to have a synergy to enhance both the ecological and landscape values together. | Enhance the landscape and visual value | DSD | Polders & Attenuation Ponds where possible | Prior to Construction, Construction Phase & Maintenance in Operation Phase | |
| | | Depending on detailed design, part of these attenuation ponds (mainly the biofiltration zone) could be refined in an appropriate manner, without compromising its primary functions of treating surface runoff and flood protection, to incorporate ecological and landscape design such as planting of aquatic plants and butterfly foodplant for providing the landscape and ecological enhancement. | | | | | |
| Landscape | e and Visua | l (Construction & Operational Phase) | | | | | |
| S11.7 MM18 | LV18 | Landscaping on Slopes – Hydro seeding of modified slopes should be done as soon as grading works are completed to prevent erosion and subsequent loss of landscape resources and character. Woodland tree seedlings and/ or shrubs should be planted where gradient and site conditions allow. In addition, landscape planting should be provided for the retaining structures associated with modified slopes where condition allow. | Enhance landscape value, plant diversity and their visual appearance | CEDD | Onsite, particularly in TCW area | Prior to Construction, Construction Phase & Maintenance in Operation Phase | • GEO Publication No.1/2011 Technical Guidelines on Landscape Treatment for Slopes by CEDD in 2011 |
| S11.7 MM19 | LV19 | Landscape Treatment on Channelized Watercourses – For the channelized watercourses in Tung Chung Stream that will be dechannelized, the Drainage Services Department Practice Note No.1/2005 – Guidelines on Environmental Considerations for River Channel Design, should be considered and appropriate measures included ensuring the new watercourses match the existing as far as possible. | Avoid direct impacts on the watercourse Improve the visual amenity | CEDD | The channelized watercourses throughout the TCW area | Prior to Construction, Construction Phase & Maintenance in Operation Phase | • Drainage Services Department Practice Note No.1/2005 – Guidelines on Environmental |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementati on Agent | Location | Implementation Stage | Requirements and / or standards to be achieved |
|---------------|-----------------|--|--|---|---|--------------------------------------|---|
| | | Measures can include enhancement planting to upgrade the channels as appropriate, including consideration of wetland planting along embankments where appropriate; as well as consideration of the best materials for the channel lining (e.g. gabion). | | | | | Considerations for River Channel Design |
| S11.7 MM20 | LV20 | Light Control – Construction day and night time lighting should be controlled to minimize glare impact to adjacent VSRs during the construction stage. Street and night time lighting shall also be controlled to minimize glare impact to adjacent VSRs during the operation phase. | Minimize negative glare impact to adjacent VSRs | Relevant Government Departments / Private Sector | Through-out the TCW and TCE areas | Construction Phase & Operation Phase | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|--|--|-----------------------------|--|---------------------------|--|
| Cultural 1 | Heritage Im | pact (Construction and Operational Phase) | | | | | |
| S.12.5 | СН1 | Terrestrial Archaeology • Implement rescue excavations/ survey-cum-rescue excavations/ further surveys after land resumption and prior to any construction works (see Figure 14.1 for the locations of rescue excavations/survey-cum-rescue excavations/further survey) | Rescue excavations to salvage archaeological data and cultural materials Survey-cum-rescue excavations to better locate and design the follow up rescue excavations Further surveys to obtain sufficient data for formulation of appropriate mitigation measures | Future Private Developer | After land resumption and prior to any construction works | resumption and | Guidelines for Cultural Heritage Impact Assessment TM-EIAO Annex 10 and Annex 19 Antiquities and Monuments Ordinance |
| S.12.5 | CH2 | Terrestrial Archaeology Implement watching brief during construction phase (see Figure 14.1 for the locations of watching brief) | To identify and record any archaeological material or features revealed during construction phase | Future Private | During construction phase | During construction phase | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-----------------|-----------------|---|---|-------------------------|-------------------------|-------------------------|---|
| EM&A P | roject | | | | | | |
| S13.2 | EM1 | An Independent Environmental Checker needs to be employed as per the EM&A Manual. | Control EM&A Performance | Project Proponent | All constructi on sites | Construction stage | • EIAO Guidance Note No.4/2010 • TM-EIAO |
| S13.2 – 13.4 | EM2 | An Environmental Team needs to be employed as per the EM&A Manual. Prepare a systematic Environmental Management Plan to ensure effective implementation of the mitigation measures. An environmental impact monitoring needs to be implementing by the Environmental Team to ensure all the requirements given in the EM&A Manual are fully complied with. | Perform environmental monitoring & auditing | Project Proponent | All constructi on sites | Construction stage | • EIAO Guidance Note No.4/2010 • TM-EIAO |

| Docum ent Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------------|-----------------|--|---|-------------------------|--------------------------------------|-------------------------|---|
| Works Ve | essel Travel | Routes (Extracted from Works Vessel Travel Route Plan subm | itted under Condition 2.13 oj | the EP) | | | |
| S3.2 | WVTR1 | All works vessels shall be equipped with Global Positional System (GPS) or equivalent automatic identification system (AIS) for real time tracking and monitoring of their travel routing, speed and anchorage points. The system shall be capable to record and analyse the travel routing, speed and anchorage points. | Control EM&A Performance | Contractor | All marine constructi on sites | Construction stage | EIA Contractual requirements |
| S3.3.1 | WVTR2 | Once approaching or leaving the entrance of the silt curtain, all vessels will travel at a speed no greater than 8 knots between the site and boundary of The Brothers Marine Park. The vessels can then navigate at normal speed (8-12 knots) after that distance unless other restrictions are imposed. If any dolphins are sighted within 250m of a vessel then the vessel will slow down to a speed no greater than 5 knots for at least 3 minutes after the last sighting. | Protection of CWD | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements |
| S3.3.2 | WVTR3 | All captains and the supervising staff should undergo training to learn about local dolphins and porpoises. They should be trained to be aware of the protocol for dolphin friendly" vessel operation (refer to the Code of Conduct for Dolphin Watching Activities from AFCD). | Protection of CWD | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements |
| S3.3.2 | WVTR4 | Training on the requirements of the WVTRP would be provided for construction vessels' personnel to follow, which should include the details of the normal operational routings of the construction works vessels and reporting of deviations from the normal operational routings of the construction works vessels. The training course will be given to the licensed vessel captains by the trainers before commencement of work and refreshment course will be provided every quarter. | Protection of CWD | Contractor | All marine constructi on sites | Construction stage | EIA Contractual requirements |

| Docum ent Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved | | |
|-------------------|--|---|---|-------------------------|--------------------------------|-------------------------|---|--|--|
| Deploymo | Deployment of Silt Curtain(s) (Extracted from Silt Curtain Deployment Plan submitted under Condition 2.16 of the EP) | | | | | | | | |
| S4 | SCD1 | Before the start of the installation work, Qualified Ecologists with dolphin monitoring experience shall scan the exclusion zone for at least 30 minutes. If dolphins are observed in the exclusion zone, the installation work shall be delayed until the dolphins left the area. | Protection of CWD | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |
| S4 | SCD2 | If dolphins are observed within the exclusion zone during the installation work, the relevant part of the work shall cease until the dolphins left the area. | Protection of CWD | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |
| S5 | SCD3 | On-board supervisors will be assigned to check the condition of the silt curtain before commencement of works every day. An inspection checklist will be kept on site for record purpose. | Silt Curtain Integrity | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |
| S5 | SCD4 | For the tentative arrangement of silt curtain under adverse weather, the silt curtain will not be temporary removed during adverse weather. However, related works will be suspended immediately if silt curtain is found any damaged. | Silt Curtain Integrity | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |
| S5 | SCD5 | Diver inspection shall be carried out if necessary to inspect the installation and decommission of silt curtain to ensure proper installation and functioning of the silt curtain according to the design drawings. Nearby marine works will resume after repairing of the damaged silt curtains. | Silt Curtain Integrity | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |
| S5 | SCD6 | Refuse around the silt curtain will be collected at regular intervals on a daily basis so that water behind the silt curtains will be kept free from floating debris. | Waste Management | Contractor | All marine constructi on sites | Construction stage | • EIA • Contractual requirements | | |

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---------------------------------|---|-------------------------|----------------------|-------------------------|---|
|-------------|-----------------|---------------------------------|---|-------------------------|----------------------|-------------------------|---|

Post-planting Monitoring and Maintenance (Details to be provided after the submission of Detailed Compensatory Woodland Planting Plan as required under EP Condition 2.22)

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|-----------------|---------------------------------|---|-------------------------|----------------------|-------------------------|---|
|-------------|-----------------|---------------------------------|---|-------------------------|----------------------|-------------------------|---|

Use of New Low Noise Road Surfacing Material(s) (Details to be provided after the submission of Plan for Review of Use of New Low Noise Road Surfacing Material(s) as required under EP Condition 2.23)

| EIA Ref. | EM&A Log Ref | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concerns to address | Implementation Agent | Location / Timing | Implementation Stage | Requirements and / or standards to be achieved |
|-------------|--|---|---|-------------------------|-------------------------|-------------------------|---|
| | Follow-up actions to be taken by the Contractor and Dump Truck Drivers in case of Illegal Dumping and Landfilling of C&D Materials (Extracted from Waste Management Plan submitted under Condition 2.24 of the EP) | | | | | | |
| S5.4 | WM1 | Investigation report will be prepared by the Contractor and submit to ER within 2 working days. | Control EM&A Performance | | All constructi on sites | | EP Contractual requirements |
| S5.4 | WM2 | The Contractor will discuss with ER for the follow up actions (e.g. warning letter, cease operation, etc.) if required. | Control EM&A Performance | Contractor | All constructi on sites | | EP Contractual requirements |



ANNEX C

STATUS OF SUBMISSIONS AND IMPLEMENTATION STATUS OF MITIGATION MEASURES UNDER EP

Annex C Status of Submissions and Implementation Status of Mitigation Measures under EP

| EP | Submission / Implementation Status | Status |
|-----------|--|--|
| Condition | · • | |
| 2.1 | Set up of Community and Professional | Community and Professional Liaison |
| | Liaison Groups | Groups were set up. |
| 2.1 | Complaint Management Plan (for | Updated Plan was accepted by EPD on |
| | Contracts 1, 2, 3 and 7) | 19 January 2023 |
| 2.5 | Employment of Qualified Ecologist(s) | Qualified Ecologists have been |
| | | employed to carry out work relating to |
| | | ecological aspects. |
| 2.6 | Employment of Surveillance Team | Surveillance Team has been employed |
| 0.11 | M | to conduct regular site inspection. |
| 2.11 | Management Organizations (for Contracts | Updated Submission was submitted to |
| | 1, 2, 3 and 7) | EPD on 1 June 2022 and accepted by |
| 2.12 | Construction Works Schedule and | EPD on 7 June 2022 |
| 2.12 | | Updated Plan was accepted by EPD on 3 March 2023 |
| 2.13 | Location Plans (for Contracts 1, 2, 3 and 7) Works Vessel Travel Pouts Plan (for | |
| 2.13 | Works Vessel Travel Route Plan (for Contract 1) | Accepted by EPD |
| 2.14 | Eco-shoreline Implementation Plan (for | Updated Plan was accepted by EPD on |
| | Contract 1) | 24 July 2023 |
| 2.15 | Dolphin Watching Plan (for Contract 1) | Updated Plan was submitted on 21 |
| | 1 0 (/ | September 2018 and accepted by EPD |
| | | on 12 October 2018 |
| 2.16 | Silt Curtain Deployment Plan (for | Updated Plan was accepted by EPD on |
| | Contract 1) | 24 April 2023 |
| 2.17 | Spill Response Plan (for Contract 1) | Accepted by EPD |
| 2.18 | Plan on Provision of Buffer Zones | To be prepared no later than 3 months |
| | | before the commencement of |
| | | construction works at Tung Chung |
| | | Valley. Refer to the EM&A Reports of |
| | | TCW. |
| 2.19 | River Park Plan | To be prepared no later than 3 months |
| | | before the commencement of |
| | | construction works at Tung Chung |
| | | Valley. Refer to the EM&A Reports of TCW. |
| 2.20 | Habitat Enhancement and Translocation | To be prepared no later than 3 months |
| 2.20 | Plan for Amphibian Species of | before the commencement of |
| | Conservation Importance | construction works at Tung Chung |
| | Conscivation importance | Valley. Refer to the EM&A Reports of |
| | | TCW. |
| 2.21 | Detailed Preservation and/or | Accepted by EPD on 9 December 2021 |
| | Translocation Plan for Plant Species of | |
| | Conservation Importance | |
| 2.22 | Detailed Compensatory Woodland | The Plan was submitted to EPD on 10 |
| | Planting Plan | June 2022 and accepted with conditions |
| | | by EPD on 23 June 2022 |
| 2.23 | Plan for Review of Use of New Low Noise | The revised Plan was submitted to EPD |
| | Road Surfacing Material(s) | on 20 December 2023 |
| 2.24 | Waste Management Plan (for Contracts 1, | Updated Plan was accepted by EPD on |
| | 2, 3 and 7) | 18 May 2023 |

| EP | Submission/Implementation Status | Status |
|-----------|--|---|
| Condition | , 1 | |
| 2.25 | (i) no dredging of marine sediment shall | Completed |
| | be carried out for the Project | |
| | (ii) all reclamation filling works shall be | Completed |
| | carried out within a leading seawall of | |
| | at least 200m; and | |
| | (iii) silt curtains surrounding the | Completed |
| | reclamation area shall be deployed in | |
| | accordance with the Silt Curtain | |
| 2.26 | Deployment Plan | Completed |
| 2.20 | Implement Silt Curtain Deployment Plan and Spill Response Plan | Completed |
| 2.27 | Implement dolphin exclusion zone of | Completed |
| 2,21 | 250m around the reclamation site at Tung | Completed |
| | Chung East during the installation of the | |
| | perimeter silt curtains and any re- | |
| | deployment of the perimeter silt curtains | |
| | by Qualified Ecologist(s) | |
| 2.28 | Once the perimeter silt curtains are | Completed |
| | installed or re-deployed, the Dolphin | |
| | Watching Plan shall be implemented as | |
| | part of the EM&A programme | |
| 2.29 | (i) no underwater blasting and | Completed |
| | percussive piling shall be carried out for | |
| | the Project; and | Completed |
| | (ii) air compressors and other noisy | Completed |
| | equipment mounted on works vessels shall be acoustically-decoupled | |
| 2.30 | Implement Works Vessel Travel Route | Completed |
| | Plan | completed |
| | Implement Eco-shoreline Implementation | Under implementation |
| | Plan | • |
| | Implement Dolphin Watching Plan | Completed |
| 2.31 | Implement Plan on Provision of Buffer | Detailed Preservation and/or |
| | Zones, River Park Plan, Habitat | Translocation Plan for Plant Species of |
| | Enhancement and Translocation Plan for | Conservation Importance and Detailed |
| | Amphibian Species of Conservation | Compensatory Woodland Planting Plan |
| | Importance, Detailed Preservation and/or | are under implementation |
| | Translocation Plan for Plant Species of | |
| | Conservation Importance and Detailed | |
| 2.32 | Compensatory Woodland Planting Plan Implement Plan for review of the use of | To be implemented |
| 2.52 | new road surfacing material(s) | 10 be implemented |
| | Implement Waste Management Plan | Under implementation |
| 2.33 | Install noise barriers and low noise road | To be implemented |
| | surfacing at the extended Chung Mun | 1 |
| | Road and Road D3 | |
| | All noise mitigation measures | |
| | implemented shall be properly | |
| | maintained during the operation of the | |
| | above roads | |

| EP | Submission / Implementation Status | Status |
|-----------|---|-------------------|
| Condition | | |
| 2.34 | Implement a deodouriser with an odour | To be implemented |
| | removal efficiency of at least 95% shall be | |
| | installed, operated and maintained within | |
| | each sewage pumping station. The | |
| | exhaust of the deodouriser shall be | |
| | oriented away from sensitive receivers; | |
| | and all odourous facilities of each | |
| | sewage pumping station shall be | |
| | enclosed and negative pressure shall be | |
| | maintained within the facilities. | |
| 2.35 | Enclose all the pumps inside a building | To be implemented |
| | structure | |
| 2.36 | (i) a 100% standby pumping capacity | To be implemented |
| | shall be installed and maintained | |
| | (ii) a 50% spare pumping capacity shall | To be implemented |
| | be installed and maintained | |
| | (iii) dual-feed power supply shall be | To be implemented |
| | installed and maintained; and | |
| | (iv) an emergency facility with a 6-hour | To be implemented |
| | storage capacity of average dry weather | |
| | flow shall be installed and maintained. | |



ANNEX D

STATUS OF STATUTORY ENVIRONMENTAL REQUIREMENS

Annex D Status of Statutory Environmental Requirements

| Contract No. | Description | Location | Ref No. | Status |
|--|--|---|---------------------------|--|
| General | Environmental Permit | TCNTE Works Area | EP-519/2016 | Granted on 9 Aug 2016 |
| Contract No. NL/2017/03 (Contract 1) | Discharge License under Water Pollution Control Ordinance | Area WA1, near Ying Tung Road, Tung Chung | WT00034715-2019 | Validity from 21 Jan 2020 to 31 Jan 2025 |
| | Billing Account for Disposal of Construction Waste | - | Application No. 7029877 | Approved on 22 January 2018 |
| | Registration as Chemical Waste Producer | Site Office for TCE | WPN-5213-950- B2528-01 | Issued on 28 Feb 2018 |
| | | TCE Site Area | WPN-5213-950- B2528-02 | Issued on 20 Apr 2018 |
| | | Area WA3, near To Kau Wan, Tung Chung | WPN-5213-974- B2528-03 | Issued on 9 April 2019 |
| Contract No. NL/2020/02 (Contract 2) | Billing Account for Disposal of Construction Waste | - | Application No. 7040975 | Approved on 29 Jul 2021 |
| | Registration as Chemical Waste Producer | Working site of Contract No. NL/2020/02 | WPN-5213-950- C4323-04 | Issued on 17 Aug 2021 |
| | Discharge License under Water Pollution Control Ordinance | Portion 3 | WT00040695-2022 | Validity from 14 Jun 2022 to 30 Jun 2027 |
| | Orumance | Portion 5A and 6 | WT00040696-2022 | Validity from 14 Jun 2022 to 30 Jun 2027 |
| | | HDD Area | WT00042688-2022 | Validity from 2 Feb 2023 to 29 Feb 2028 |
| Contract No. NL/2020/03 (Contract 3) | Billing Account for Disposal of Construction Waste | - | Application No. 7041004 | Approved on 13 Jul 2021 |
| | Registration as Chemical Waste Producer | Working site of Contract No. NL/2020/03 | WPN-5213-950- B2500-07 | Issued on 25 Aug 2021 |

| Contract No. | Description | Location | Ref No. | Status |
|--|--|---|---------------------------|--|
| | Construction Noise Permit | Main Reclamation Area and MDN Areas | GW-RS0458-24 | Validity from 18 May 2024 to 29 Oct 2024 |
| | | General Works in To Kau Wan | GW-RW0568-24 | Validity from 28 Jun 24 to 19 Dec 2024 |
| | | 24 Hours Twin Rising Mains Pipe jacking Operation at Ying Tung Road | GW-RS0591-24 | Validity from 28 Jun 24 to 27 Sep 2024 |
| | | Trucks Mobilization | GW-RS0324-24 | Validity from 28 Apr 2024 to 27 Oct 2024 |
| | | Percussive Piling Works at CUT Area | PP-RS0008-24 | Validity from 8 May 2024 to 27 Sep 2024 |
| | Discharge License under Water Pollution Control Ordinance | of Contract No. | WT00039577-2021 | Validity from 1 Dec 2021 to 31 Dec 2026 |
| | Ordinance | Construction Site of Contract No. NL/2020/03 (Man Tung Road) | WT10001265-2023 | Validity from 13 Oct 2023 to 31 Oct 2028 |
| | | Construction Site of Contract No. NL/2020/03 (Yi Tung Road) | WT10001296-2023 | Validity from 19 Oct 2023 to 31 Oct 2028 |
| | | Construction Site of Contract No. NL/2020/03 (Ying Tung Road) | WT10002162-2023 | Validity from 1 Mar 2024 to 29 Mar 2029 |
| | Licence for the conduct of a Specified Process (SP Licence) | TCNTE Works Area | L-3-264 (1) | Validity from 12 Aug 2020 to 11 Aug 2024 |
| Contract No. NL/2020/07 (Contract 7) | Billing Account for Disposal of Construction Waste | - | Application No. 7041997 | Approved on 26 Oct 2021 |
| | Registration as Chemical Waste Producer | Working site of Contract No. NL/2020/07 | WPN-5213-961- B2500-08 | Issued on 30 Nov 2021 |
| | Construction Noise Permit | Portion 32 Sea Wall | GW-RS0108-24 | Validity from 23 Feb 2024 to 22 Aug 2024 |

| Contract No. | Description | Location | Ref No. | Status |
|--------------|--|--|-----------------|--|
| | | C7 Site Office | GW-RS0403-23 | Validity from 2 May 2024 to 28 Oct 2024 |
| | | Portion 32 Receiving Pit | GW-RS0228-24 | Validity from 16 Apr 2023 to 15 Oct 2024 |
| | | Portion 33 Jacking Pit | GW-RS0330-24 | Validity from 12 Apr 2024 to 8 Oct 2024 |
| | | Portion 146 | GW-RS0276-24 | Validity from 3 Apr 2024 to 2 Oct 2024 |
| | Discharge License under Water Pollution Control Ordinance | Working site of Contract No. NL/2020/07 (Portion 32) | WT00041756-2022 | Validity from 27 Oct 2022 to 31 Oct 2027 |
| | | Working site of Contract No. NL/2020/07 (Portion 33, 36- 38) | WT00040693-2022 | Validity from 31 May 2022 to 31 May 2027 |
| | | Working site of Contract No. NL/2020/07 (Portion 30, 31) | WT0043124-2023 | Validity from 2 Mar 2023 to 31 Mar 2028 |
| | | Working site of Contract No. NL/2020/07 (Portion 146) | WT00043119-2023 | Validity from 2 Mar 2023 to 31 Mar 2028 |



ANNEX E AIR QUALITY



ANNEX E1

CALIBRATION CERTIFICATES FOR AIR QUALITY

ALS Technichem (HK) Pty Ltd

ALS Laboratory Group





SUB-CONTRACTING REPORT

CONTACT

: MR MAGNUM FAN

WORK ORDER

HK2342916

CLIENT ADDRESS

PROJECT

: ENVIROTECH SERVICES CO.

: RM 712, 7/F, MY LOFT 9 HOI WING ROAD,

TUEN MUN, N.T. HK

SUB-BATCH

DATE RECEIVED : 26-OCT-2023

DATE OF ISSUE : 2-NOV-2023

NO. OF SAMPLES : 1

CLIENT ORDER

General Comments

Sample(s) was/ were submitted by client. Sample(s) arrived laboratory in ambient condition.

Sample information (Project name, Sample ID, Sampling date/time, etc.) is provided by client.

Result(s) of sample(s) is/are reported on as received basis, unless otherwise specified. The result(s) is/are related only to the item(s) tested.

Calibration was subcontracted to Envirotech Services Company.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories

Signatories

Position

Richard Fung

Managing Director

WORK ORDER

CLIENT

: HK2342916

SUB-BATCH

1 : ENVIROTECH SERVICES CO.

PROJECT



| ALS Lab | Client's Sample ID | Sample Type | Sample Date | External Lab Report No. |
|---------------|-----------------------|----------------|-------------|-------------------------|
| HK2342916-001 | Sibata LD-3B (436553) | Equipments | 21-Oct-2023 | S/N: 436553 |



Envirotech Services Co.

Rm. 712, 7/F My Loft, 9 Hoi Wing Road, Tuen Mun. H.K. Tel: 2560 8450 Fax: 2560 6553

E-mail: envirotech@netvigetor.com

Equipment Verification Report (TSP)

| East | pment | Calib | rated. |
|------|---------|--------|--------|
| CUUI | Dillell | Callin | iateu. |

Type:

Laser Dust Monitor

Manufacturer:

Sibata LD-3B

Serial No.:

436553

Equipment Ref.:

N/A

ALS Job Order:

HK2342309

Standard Equipment

Standard Equipment:

High Volume Sampler (TSP)

Location:

Envirotech Room (Calibration Room)

Equipment Ref.:

HVS 8162

Last Calibration Date:

21-Oct-2023

Equipment Verification Results:

Verification Date:

14-Oct-2023

| | | Mean | Mean | Concentration in µg/m³ | Concentration in µg/m³ |
|------------|-------------|---------|----------|------------------------|------------------------|
| Hour | Time | Temp °C | Pressure | (Standard Equipment) | (Calibrated Equipment) |
| | | | (hpa) | (Y-Axis) | (X-Axis) |
| 1hr 00mins | 0910-1010 | 21.8 | 1019 | 10 | 17 |
| 2hr 00mins | 1015-1215 | 21.8 | 1019 | 30 | 38 |
| 3hr 00mins | . 1410-1710 | 23.5 | 1019 | 71 | 67 |

80

Linear Regression of Y or X


Slope (K-factor):

 $1.0622(\mu g/m^3)/CPM$

Correlation Coefficient (R):

Date of Issue:

0.9872 26-Oct-2023



Remarks:

- 1. Strong Correlation (>0.8)
- Factor 1.0622 (µg/m³)/CPM should be applied for TSP monitoring

Operator:

P.F.Yeung Signature

Da

Date: 26 October 2023

QC Reviewer:

K.F.Ho

Signature

Fail

Date: 26 October 2023

^{*}If R<0.5, repair or verification is required for the equipment

TSP SAMPLER CALIBRATION CACULATION SPREADSHEET

Location: Rm. 712, My Loft, Tuen Mun Date of Calibration: 13-Oct-23 HVS ID: 8162 Next Calibration Date: 12-Dec-23 Name and Model: TISCH HVS Model TE-5170 Operator: P.F. Yeung CONDITIONS Sea Level Pressure (hpa) 1015 Corrected Pressure (mm Hg) 762.1 28.9 Temperature (°C) Temperature (K) 293 CALIBRATION ORIFICE Make: TISCH **Qstd Slope** 2.06918 Model: TE-5025A **Qstd** Intercept -0.04220Serial#: 2454 CALIBRATION Plate H2O(L) H20(R) H₂O IC I Qstd LINEAR No. (in) (in) (m3/min) (in) (chart) (corrected) REGRESSION 18 6.5 6.5 13.0 1.806 62 63.54 Slope= 32.843 13 4.7 4.7 9.4 1.539 56 57.39 Intercept= 5.518 10 3.4 3.4 6.8 1.312 49 50.22 Corr. Coeff.= 0.9939 7 2.3 2.2 4.5 1.071 40 40.99 5 1.6 1.5 3.1 0.892 33 33.82 IC Flow Rate Calulations: 70 Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]65 IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]60 Qstd = standard flow rate 55 IC = corrected chart response 50 I = actual chart response m = calibrator Qstd slope 45 b = calibrator Qstd intercept 40 Ta = actual temperature during calibration (deg K)

35

30

25

20 15

10

0.7 0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6 1.7 1.8 1.9

Qstd(m3/min)

Pa = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

Tav = daily average temperature
Pav = daily average pressure

m = sampler slope
b = sampler intercept

I = chart response



RECALIBRATION DUE DATE:

December 15, 2023

Certificate of Calibration

Calibration Certification Information

Cal. Date: December 15, 2022

Rootsmeter S/N: 438320

Ta: 295

Pa: 748.0

°K

Operator: Jim Tisch

Calibrator S/N: 4064

mm Hg

Calibration Model #: TE-5025A

| Run | Vol. Init (m3) | Vol. Final (m3) | ΔVol. (m3) | ΔTime (min) | ΔP (mm Hg) | ΔH (in H2O) |
|-----|-------------------|--------------------|---------------|----------------|---------------|----------------|
| 1 | 1 | 2 | 1 | 1.4430 | 3.2 | 2.00 |
| 2 | 3 | 4 | 1 | 1.0210 | 6.4 | 4.00 |
| 3 | 5 | 6 | 1 | 0.9170 | 7.9 | 5.00 |
| 4 | 7 | 8 | 1 | 0.8730 | 8.8 | 5.50 |
| | 0 | 10 | 1 | 0.7210 | 12.8 | 8.00 |

| | | Data Tabula | tion | | 1 |
|--------|----------|---|--------|----------|------------|
| Vstd | Qstd | $\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}$ | | Qa | √∆H(Ta/Pa) |
| (m3) | (x-axis) | (y-axis) | Va | (x-axis) | (y-axis) |
| 0.9900 | 0.6861 | 1.4101 | 0.9957 | 0.6900 | 0.8881 |
| 0.9858 | 0.9655 | 1.9943 | 0.9914 | 0.9711 | 1.2560 |
| 0.9838 | 1.0728 | 2.2296 | 0.9894 | 1.0790 | 1.4042 |
| 0.9826 | 1.1255 | 2.3385 | 0.9882 | 1.1320 | 1.4728 |
| 0.9772 | 1.3554 | 2.8203 | 0.9829 | 1.3632 | 1.7762 |
| | m= | 2.10977 | | m= | 1.32110 |
| QSTD | b= | -0.03782 | QA | b= | -0.02382 |
| | r= | 0.99998 | | r= | 0.99998 |

| | Calculation | ns | |
|-------|--|--------------|--|
| Vstd= | ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta) | Va= | ΔVol((Pa-ΔP)/Pa) |
| Qstd= | Vstd/ΔTime | Qa= | Va/ΔTime |
| | For subsequent flow rat | e calculatio | ns: |
| Qstd= | $1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)-b\right)$ | Qa= | $1/m\left(\left(\sqrt{\Delta H\left(Ta/Pa\right)}\right)-b\right)$ |

| | Standard Conditions |
|----------------|------------------------------|
| Tstd: | 298.15 °K |
| Pstd: | 760 mm Hg |
| | Key |
| ΔH: calibrator | manometer reading (in H2O) |
| ΔP: rootsmete | er manometer reading (mm Hg) |
| Ta: actual abs | olute temperature (°K) |
| Pa: actual bar | ometric pressure (mm Hg) |
| b: intercept | |
| m: slope | |

RECALIBRATION

US EPA recommends annual recalibration per 1998
40 Code of Federal Regulations Part 50 to 51,
Appendix B to Part 50, Reference Method for the
Determination of Suspended Particulate Matter in
the Atmosphere, 9.2.17, page 30

Tisch Environmental, Inc. 145 South Miami Avenue Village of Cleves, OH 45002 www.tisch-env.con

TOLL FREE: (877)263-7610 FAX: (513)467-900!



ANNEX E2

MONITORING SCHEDULE FOR AIR QUALITY

Tung Chung New Town Extension (East) Air Quality Monitoring Schedule (July 2024)

| S | unday | Monday | | | Thursday | Friday | Saturday |
|---|--------|------------------------|------------------------|------------------------|------------------------|------------------------|----------|
| | | 1-Jul | | 3-Jul | 4-Jul | 5-Jul | 6-Jul |
| | | | | | | Air Quality Monitoring | |
| | 7-Jul | 8-Jul | 9-Jul | 10-Jul | 11-Jul | 12-Jul | 13-Jul |
| | | | | | Air Quality Monitoring | | |
| | 14-Jul | 15-Jul | 16-Jul | 17-Jul | 18-Jul | 19-Jul | 20-Jul |
| | | | | Air Quality Monitoring | | | |
| | 21-Jul | 22-Jul | 23-Jul | 24-Jul | 25-Jul | 26-Jul | 27-Jul |
| | | | Air Quality Monitoring | | | | |
| | 28-Jul | 29-Jul | 30-Jul | 31-Jul | | | |
| | | Air Quality Monitoring | | | | | |




ANNEX E3

MONITORING RESULTS FOR AIR QUALITY

Table E3Data for 1-hr TSP Monitoring at Station DM-1

| Date | Start Time | Finish Time | Weather | 1-hour TSP (μg/m³) |
|-----------|------------|-------------|---------|-----------------------|
| 7/5/2024 | 13:00 | 14:00 | Sunny | 49 |
| 7/5/2024 | 14:00 | 15:00 | Sunny | 47 |
| 7/5/2024 | 15:00 | 16:00 | Sunny | 50 |
| 7/11/2024 | 13:50 | 14:50 | Sunny | 34 |
| 7/11/2024 | 14:50 | 15:50 | Sunny | 35 |
| 7/11/2024 | 15:50 | 16:50 | Sunny | 34 |
| 7/17/2024 | 9:03 | 10:03 | Sunny | 48 |
| 7/17/2024 | 10:03 | 11:03 | Sunny | 48 |
| 7/17/2024 | 11:03 | 12:03 | Sunny | 49 |
| 7/23/2024 | 13:15 | 14:15 | Sunny | 52 |
| 7/23/2024 | 14:15 | 15:15 | Sunny | 52 |
| 7/23/2024 | 15:15 | 16:15 | Sunny | 54 |
| 7/29/2024 | 13:45 | 14:45 | Cloudy | 47 |
| 7/29/2024 | 14:45 | 15:45 | Cloudy | 47 |
| 7/29/2024 | 15:45 | 16:45 | Cloudy | 50 |

Figure E3 Graphical Presentation for 1-hr TSP Monitoring at Station DM-1

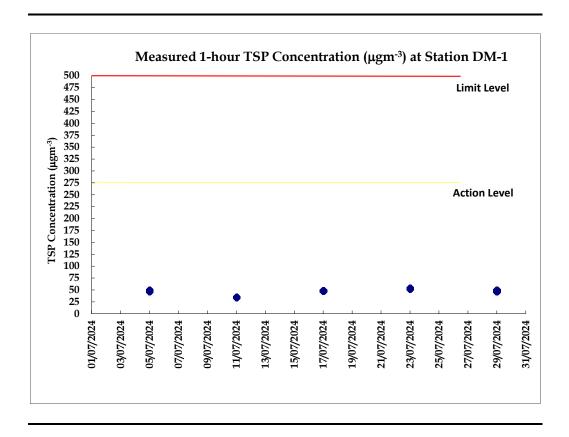



ANNEX E4

EVENT AND ACTION PLAN FOR AIR QUALITY

Annex E4 Event and Action Plan for Air Quality

| Event | | Action | 1 | |
|---|---|--|---|---|
| Event | ET | IEC | ER | Contractor |
| Action level exceedance for one sample | Identify source, investigate the causes of exceedance and propose remedial measures; Inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to daily. | Check monitoring data submitted by ET; Check Contractor's working method. | 1. Notify Contractor. | Rectify any unacceptable practice; Amend working methods if appropriate. |
| Action level exceedance for two or more consecutive samples | Identify source; Inform IEC and ER; Advise the ER on the effectiveness of the proposed remedial measures; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. | Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ET on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. | failure in writing;2. Notify Contractor;3. Ensure remedial measures properly implemented. | Submit proposals for remedial to ER within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. |

| Frank | Action | | | | | | |
|--|--|--|---|--|--|--|--|
| Event | ET | IEC | ER | Contractor | | | |
| Limit level exceedance for one sample | Identify source, investigate the causes of exceedance and propose remedial measures; Inform ER, Contractor and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. | Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. | failure in writing;2. Notify Contractor;3. Ensure remedial measures properly implemented. | Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. | | | |
| Limit level exceedance for two or more consecutive samples | Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. | Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. | Confirm receipt of notification of failure in writing; Notify Contractor; In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated. | | | |



ANNEX F

NOISE



ANNEX F1 CALIBRATION CERTIFICATES FOR NOISE



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration

校正證書

Certificate No.:

C240423

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC24-0020)

Date of Receipt / 收件日期: 5 January 2024

Description / 儀器名稱

Precision Acoustic Calibrator

Manufacturer / 製造商

LARSON DAVIS

Model No./型號

CAL200

Serial No./編號

16172

Supplied By / 委託者

Envirotech Services Co.

Room 712, 7/F, My Loft, 9 Hoi Wing Road, Tuen Mun,

New Territories, Hong Kong

TEST CONDITIONS / 測試條件

Temperature / 溫度 :

Relative Humidity / 相對濕度 :

 $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

24 January 2024

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed specified limits.

These limits refer to manufacturer's published tolerances as requested by the customer.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Hottinger Brüel & Kjær Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies

- Fluke Everett Service Center, USA

Tested By 測試

Engineer

Certified By 核證

H C Chan

Date of Issue 簽發日期

24 January 2024

Engineer

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

Website/網址: www.suncreation.com

written approval of this laboratory. 本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓



Sun Creation Engineering Limited Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C240423

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.

2. The results presented are the mean of 3 measurements at each calibration point.

3. Test equipment:

Equipment ID CL130

CL281 TST150A Description

Universal Counter

Multifunction Acoustic Calibrator Measuring Amplifier Certificate No.

C233799

CDK2302738 C221750

4. Test procedure: MA100N.

5. Results:

5.1 Sound Level Accuracy

| UUT | Measured Value | Mfr's Limit | Uncertainty of Measured Value |
|---------------|----------------|-------------|-------------------------------|
| Nominal Value | (dB) | (dB) | (dB) |
| 94 dB, 1 kHz | 93.90 | ± 0.2 | ± 0.20 |
| 114 dB, 1 kHz | 113.90 | | |

5.2 Frequency Accuracy

| UUT Nominal Value | Measured Value | Mfr's | Uncertainty of Measured Value |
|-------------------|----------------|-------------|-------------------------------|
| (kHz) | (kHz) | Limit | (Hz) |
| 1 | 1.000 | 1 kHz ± 1 % | ± 1 |

Remark: The uncertainties are for a confidence probability of not less than 95 %.

Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。 局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration

校正證書

Certificate No.:

C234378

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC23-1403)

Date of Receipt / 收件日期: 11 July 2023

Description / 儀器名稱

Sound Level Meter

Manufacturer / 製造商

Rion NL-52

Model No. / 型號 Serial No. / 編號

00331806

Supplied By / 委託者

Envirotech Services Co.

Room 712, 7/F, My Loft, 9 Hoi Wing Road, Tuen Mun,

New Territories, Hong Kong

TEST CONDITIONS / 測試條件

Temperature / 温度:

 $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 :

 $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

30 July 2023

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed specified limits.

These limits refer to manufacturer's published tolerances as requested by the customer.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Hottinger Brüel & Kjær Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies

- Fluke Everett Service Center, USA

Tested By 測試

Assistant Engineer

Certified By 核證

Lee Engineer Date of Issue 簽發日期

31 July 2023

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration

校正證書

Certificate No.:

C234378

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.

2. Self-calibration was performed before the test.

3. The results presented are the mean of 3 measurements at each calibration point.

4. Test equipment:

Equipment ID

Description

Certificate No.

CL280

40 MHz Arbitrary Waveform Generator

C230306

CL281

Multifunction Acoustic Calibrator

CDK2302738

5. Test procedure: MA101N.

6. Results:

6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

| | UUT | Setting | | Applied Value | | UUT | IEC 61672 |
|------------|----------|------------------------|-------------------|---------------|-------------|--------------|-----------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) | Class 1 Limit (dB) |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 1 | 93.1 | ± 1.1 |

6.1.2 Linearity

| | UU' | T Setting | Applied Value | | UUT | |
|------------|----------------|------------------------|-------------------|------------|----------------|--------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.1 (Ref.) |
| | A | | | 104.00 | | 103.1 |
| | | | | 114.00 | | 113.1 |

IEC 61672 Class 1 Limit: \pm 0.6 dB per 10 dB step and \pm 1.1 dB for overall different.

6.2 Time Weighting

| | UUT | Setting | | Applied Value | | UUT | IEC 61672 |
|------------|----------|------------------------|-------------------|---------------|----------------|--------------|-----------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) | Class 1 Limit (dB) |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 1 | 93.1 | Ref. |
| | | | Slow | | | 93.1 | ± 0.3 |

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C

C234378

證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| | UUT | Setting | | Applied Value | | UUT | IEC 61672 |
|------------|----------|------------------------|-------------------|---------------|--------|--------------|-----------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | Reading (dB) | Class 1 Limit (dB) |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 63 Hz | 66.8 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 76.9 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 84.4 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 89.8 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 93.1 | Ref. |
| | | | | | 2 kHz | 94.3 | $+1.2 \pm 1.6$ |
| | | | | | 4 kHz | 94.1 | $+1.0 \pm 1.6$ |
| | | | | | 8 kHz | 92.0 | -1.1 (+2.1; -3.1) |
| | | | | | 16 kHz | 85.1 | -6.6 (+3.5; -17.0) |

6.3.2 C-Weighting

| <u> </u> | UUT | Setting | | Appl | ied Value | UUT | IEC 61672 |
|---------------|----------------|------------------------|-------------------|---------------|-----------|--------------|-----------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | Reading (dB) | Class 1 Limit (dB) |
| 30 - 130 | L _C | C | Fast | 94.00 | 63 Hz | 92.2 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 92.9 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 93.0 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 93.1 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 93.1 | Ref. |
| | | | | | 2 kHz | 92.9 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 92.3 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 90.1 | -3.0 (+2.1; -3.1) |
| | | | | | 16 kHz | 83.2 | -8.5 (+3.5; -17.0) |

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準・局部複印本證書需先獲本實驗所書面批准・



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C234378

證書編號

Remarks: - UUT Microphone Model No.: UC-59 & S/N: 10446

- Mfr's Limit: IEC 61672 Class 1

- Uncertainties of Applied Value : 94 dB : 63 Hz - 125 Hz : \pm 0.35 dB

104 dB : 1 kHz : \pm 0.10 dB (Ref. 94 dB) 114 dB : 1 kHz : \pm 0.10 dB (Ref. 94 dB)

- The uncertainties are for a confidence probability of not less than 95 %.

Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.
本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里 - 號四樓 Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 F-mail



ANNEX F2 MONITORING SCHEDULE FOR NOISE

Tung Chung New Town Extension (East)
Noise Monitoring Schedule (July 2024)

| S | unday | Monday | | Wednesday | | Friday | Saturday |
|---|---------|------------------|------------------|------------------|------------------|------------------|----------|
| | arrad y | 1-Jul | 2-Jul | 3-Jul | 4-Jul | 5-Jul | 6-Jul |
| | | | | | | Noise Monitoring | |
| | 7-Jul | 8-Jul | 9-Jul | 10-Jul | 11-Jul | 12-Jul | 13-Jul |
| | | | | | Noise Monitoring | | |
| | 14-Jul | 15-Jul | 16-Jul | 17-Jul | 18-Jul | 19-Jul | 20-Jul |
| | | | | Noise Monitoring | | | |
| | 21-Jul | 22-Jul | 23-Jul | 24-Jul | 25-Jul | 26-Jul | 27-Jul |
| | | | Noise Monitoring | | | | |
| | 28-Jul | 29-Jul | 30-Jul | 31-Jul | | | |
| | | Noise Monitoring | | | | | |



ANNEX F3 MONITORING RESULTS FOR NOISE

Table F3.1 Data for Noise Monitoring at Station NMS-CA-1A during Normal Working Hours (0700-1900 hours)

| Date & Time | L _{eq (5min)} | L ₁₀ | L ₉₀ | L _{eq (30min)} |
|-----------------|------------------------|-----------------|-----------------|-------------------------|
| 7/5/2024 13:36 | 66.4 | 68.8 | 62.5 | 65.9 |
| 7/5/2024 13:41 | 64.0 | 66.3 | 60.7 | |
| 7/5/2024 13:46 | 65.3 | 67.9 | 60.9 | |
| 7/5/2024 13:51 | 66.4 | 68.9 | 61.0 | |
| 7/5/2024 13:56 | 66.6 | 69.9 | 61.5 | |
| 7/5/2024 14:01 | 66.2 | 67.7 | 62.2 | |
| 7/11/2024 14:51 | 66.2 | 68.0 | 63.4 | |
| 7/11/2024 14:56 | 65.7 | 67.7 | 63.2 | |
| 7/11/2024 15:01 | 67.8 | 70.0 | 63.0 | 65.6 |
| 7/11/2024 15:06 | 65.9 | 68.5 | 60.9 | 0.00 |
| 7/11/2024 15:11 | 62.7 | 64.7 | 58.9 | |
| 7/11/2024 15:16 | 63.0 | 64.9 | 59.7 | |
| 7/17/2024 16:18 | 63.2 | 66.0 | 58.6 | 63.7 |
| 7/17/2024 16:23 | 65.0 | 66.5 | 58.3 | |
| 7/17/2024 16:28 | 64.6 | 67.1 | 59.3 | |
| 7/17/2024 16:33 | 62.5 | 65.2 | 58.5 | |
| 7/17/2024 16:38 | 63.3 | 66.1 | 58.2 | |
| 7/17/2024 16:43 | 62.8 | 65.6 | 57.8 | |
| 7/23/2024 13:38 | 67.0 | 68.8 | 64.6 | 65.3 |
| 7/23/2024 13:43 | 64.6 | 68.0 | 58.6 | |
| 7/23/2024 13:48 | 62.3 | 64.5 | 58.2 | |
| 7/23/2024 13:53 | 65.3 | 69.4 | 59.4 | |
| 7/23/2024 13:58 | 65.0 | 67.4 | 60.4 | |
| 7/23/2024 14:03 | 66.3 | 68.5 | 61.0 | |
| 7/29/2024 14:51 | 63.8 | 66.3 | 60.5 | 66.4 |
| 7/29/2024 14:56 | 67.7 | 71.1 | 61.2 | |
| 7/29/2024 15:01 | 65.8 | 68.5 | 60.7 | |
| 7/29/2024 15:06 | 64.7 | 67.0 | 60.9 | |
| 7/29/2024 15:11 | 66.2 | 68.7 | 61.6 | |
| 7/29/2024 15:16 | 68.4 | 70.8 | 61.9 | |

Figure F3.1 Graphical Presentation for Noise Monitoring at Station NMS-CA-1A


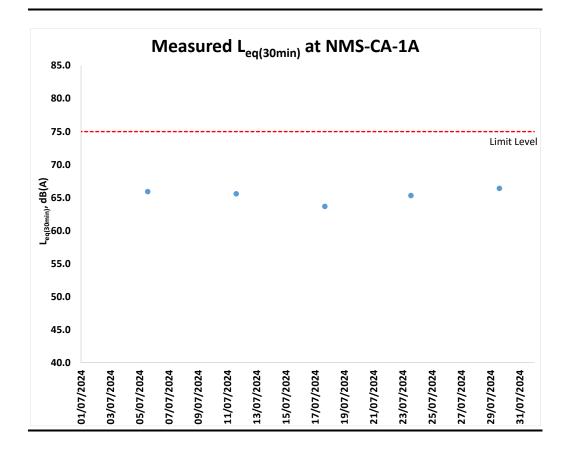


Table F3.2 Data for Noise Monitoring at Station NMS-CA-4 during Normal Working Hours (0700-1900 hours)

| Date & Time | L _{eq (5min)} | L ₁₀ | L ₉₀ | L _{eq (30min)} |
|-----------------|------------------------|-----------------|-----------------|-------------------------|
| 7/5/2024 13:00 | 67.0 | 68.8 | 64.9 | 68.6 |
| 7/5/2024 13:05 | 68.5 | 70.3 | 66.4 | |
| 7/5/2024 13:10 | 68.4 | 69.8 | 66.7 | |
| 7/5/2024 13:15 | 68.9 | 70.4 | 67.0 | |
| 7/5/2024 13:20 | 69.5 | 71.4 | 66.9 | |
| 7/5/2024 13:25 | 69.1 | 70.4 | 67.3 | |
| 7/11/2024 13:53 | 70.7 | 72.1 | 69.0 | |
| 7/11/2024 13:58 | 70.1 | 71.8 | 67.8 | |
| 7/11/2024 14:03 | 71.5 | 73.6 | 68.7 | 70.4 |
| 7/11/2024 14:08 | 70.7 | 72.1 | 69.0 | 70.4 |
| 7/11/2024 14:13 | 70.1 | 71.8 | 67.8 | |
| 7/11/2024 14:18 | 69.0 | 70.4 | 67.4 | |
| 7/17/2024 15:40 | 70.3 | 72.6 | 66.4 | |
| 7/17/2024 15:45 | 68.5 | 71.7 | 64.4 | 68.7 |
| 7/17/2024 15:50 | 67.5 | 69.8 | 63.8 | |
| 7/17/2024 15:55 | 68.8 | 71.0 | 64.9 | |
| 7/17/2024 16:00 | 67.8 | 70.4 | 64.4 | |
| 7/17/2024 16:05 | 68.8 | 70.7 | 65.4 | |
| 7/23/2024 13:00 | 65.8 | 67.1 | 64.7 | 67.0 |
| 7/23/2024 13:05 | 66.5 | 68.2 | 64.8 | |
| 7/23/2024 13:10 | 67.2 | 68.5 | 65.6 | |
| 7/23/2024 13:15 | 67.7 | 69.2 | 66.0 | |
| 7/23/2024 13:20 | 67.5 | 68.4 | 66.5 | |
| 7/23/2024 13:25 | 67.2 | 68.1 | 66.3 | |
| 7/29/2024 14:00 | 69.7 | 71.3 | 68.1 | 69.3 |
| 7/29/2024 14:05 | 69.3 | 70.8 | 67.7 | |
| 7/29/2024 14:10 | 69.2 | 71.4 | 66.6 | |
| 7/29/2024 14:15 | 69.0 | 70.6 | 67.2 | |
| 7/29/2024 14:20 | 69.4 | 71.2 | 67.1 | |
| 7/29/2024 14:25 | 68.9 | 70.6 | 65.5 | |

Figure F3.2 Graphical Presentation for Noise Monitoring at Station NMS-CA-4



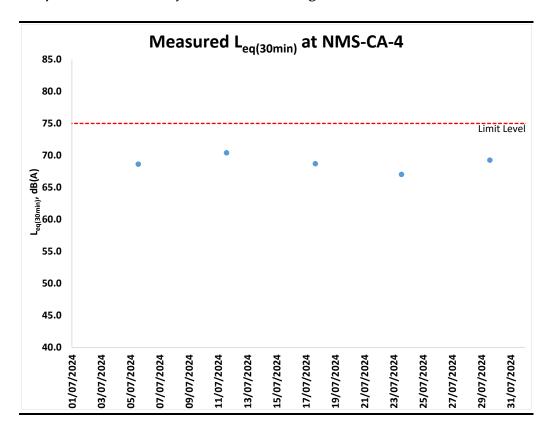

ANNEX F4 EVENT AND ACTION PLAN FOR NOISE

Annex F4 Event and Action Plan for Construction Noise

| Event | Action | | | | | |
|-------------------------|--|--|---|--|--|--|
| Event | ET | IEC | ER | Contractor | | |
| Action Level Exceedance | Notify IEC, ER and Contractor; Carry out investigation; | 1. Review the analysed results submitted by the ET; | Confirm receipt of notification of failure in writing; | 1. Submit noise mitigation proposals to IEC and ER; | | |
| | 3. Report the results of investigation to the IEC, ER and Contractor;4. Discuss with the Contractor and formulate remedial measures;5. Increase monitoring frequency to check mitigation effectiveness. | 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly;3. Supervise the implementation of remedial measures. | 2. Notify Contractor;3. Require Contractor to propose remedial measures for the analysed noise problem;4. Ensure remedial measures are properly implemented | 2. Implement noise mitigation proposals. | | |
| Limit Level Exceedance | Identify source; Inform IEC, ER, EPD and Contractor; Repeat measurements to confirm findings; Increase monitoring frequency; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Inform IEC, ER and EPD the causes and actions taken for the exceedances; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. | Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. | Confirm receipt of notification of failure in writing; Notify Contractor; Require Contractor to propose remedial measures for the analysed noise problem; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated. | | |

ENVIRONMENTAL RESOURCES MANAGEMENT

CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT



ANNEX G

COMPENSATION WOODLAND MONITORING



Photo 1 – General view of compensation woodland in Portion 1 $\,$



Photo 2 – General view of compensation woodland in Portion 2



ANNEX H

PRESERVED/TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE MONITORING




ANNEX H1

PRESERVED PLANT SPECIES OF CONSERVATION IMPORTANCE

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)







G01_30-R002



G01_30-R003



G01_30-R004

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)




G01_30-R005



G01_39-R01_Inaccessible



G01_39-R02_Inaccessible

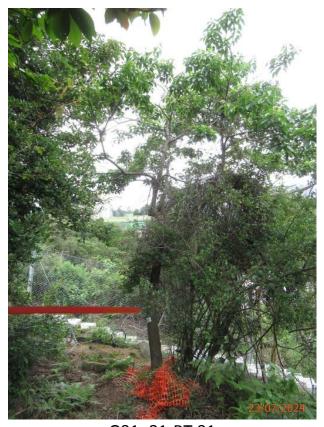

G01_81-RT-01

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)



G01_81-RT-02 (T1535)



G02_29-R007



G02_29-R013



G03_44-R014

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)



G03_44-R015



G03_44-R017



G04_21-R03



G04_45-R011

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)



G04_83_84_85-R04 (T1788)



G04_83_84_85-R05 (T1572)



G04_83_84_85-R06



G04_83_84_85-R07

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)



G04_83_84_85-R08



G04_83_84_85-R09



G04_83_84_85-R010



G04_83_84_85-R011

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)



G05_9-R04



G05_67-R008



G06_66-R009



Enkianthus quinqueflorus
Observed since November 2023

Tung Chung New Town Extension - Salt Water Supply System

Monthly Report (23 July 2024)

In-situ Plant Species of Conserva+on Importance - Photographic Records



WLH_T047

Aquilaria sinensis
Observed since November 2023

| Drawing no. | Tree group no. | Tree No. Botanical | Botanical Name | Chinese Name | | SIZE | | Amenity Value | Form | Health | Structural Condition | Conservation Status | Recommendation in Detailed Preservation and/or Translocation Plan for Plant Species of Conservation | Justification | Remarks |
|------------------|----------------|--------------------|--------------------------|--------------|------------|----------|------------|------------------|----------|------------|-------------------------|---------------------|---|-------------------------------------|---|
| | | | | | Height (m) | DBH (mm) | Spread (m) | | (Good/ F | air/ Poor) | • | <u> </u> | Importance for Tung Chung East (Retain/ Transplant/ Fell) | | |
| | G01/39 | R01 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | On Slope, Inaccessible |
| | G01/39 | R02 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | On Slope, Inaccessible |
| | G06/59 | R018 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | G03/61 | R019 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | G05/62 | RT06 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Transplant | Direct conflict with proposed works | Missing |
| | G01/81 | RT-01 | Gmelina chinensis | 石梓 | 5 | 160 | 3 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Strangled by Epiphytes |
| | G01/81 | RT-02 (T1535) | Gmelina chinensis | 石梓 | 8 | 110 | 3 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Branches, Strangled by Epiphytes. |
| | - | WLH/T047 | Aquilaria sinensis | 土沉香 | 10 | 230 | 6 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope, Observed since November 2023 |
| <0507<0A/G2/1721 | G02/82 | RT03 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Transplant | Direct conflict with proposed works | Missing |
| 60507694/C2/1721 | | R04 (T1788) | Gmelina chinensis | 石梓 | 9 | 260 | 8 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Multiple Trunks |
| | | R05 (T1572) | Gmelina chinensis | 石梓 | 8 | 120 | 5 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Broken branch |
| | | R05 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | | R06 | Gmelina chinensis | 石梓 | 5 | 100 | 3 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope |
| | G04/83/84/85 | R07 | Gmelina chinensis | 石梓 | 8 | 166 | 5 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Trunks |
| | | R08 | Gmelina chinensis | 石梓 | 7 | 160 | 5 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Broken Leader, Epicormics, Imbalanced Crown |
| | | R09 | Gmelina chinensis | 石梓 | 5 | 140 | 4 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Broken Leader wih Epiphyte, Broken Leader with Epicormics |
| | | R010 | Gmelina chinensis | 石梓 | 8 | 110 | 3 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Broken Leader with Epicormics |
| | | R011 | Gmelina chinensis | 石梓 | 9 | 130 | 4 | Good | Poor | Fair | Poor | Yes | Retain | - | On slope, Multiple Branches, Leaning without Self- correction |
| | G04/21 | R03 | Gmelina chinensis | 石梓 | 5 | 120 | 2 | Good | Fair | Fair | Fair | Yes | Retain | - | Undersized, On Slope |
| 60507694/C2/1722 | - | R04 | Enkianthus quinqueflorus | 吊鐘花 | 2 | 130 | 3 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope, Observed since November 2023 |
| | G05/9 | R04 | Gmelina chinensis | 石梓 | 5 | 100 | 2 | Good | Fair | Fair | Fair | Yes | Retain | - | On Slope |
| | G01/30 | R001 | Gmelina chinensis | 石梓 | 7 | 110 | 2 | Good | Poor | Fair | Fair | Yes | Retain | - | On Slope |
| | | R002 | Gmelina chinensis | 石梓 | 8 | 120 | 5 | Good | Poor | Poor | Fair | Yes | Retain | - | On slope, Co-dominant Branches, Root Flare was Partially Buried, Dead Stub |
| | | R003 | Gmelina chinensis | 石梓 | 5 | 140 | 2 | Good | Poor | Poor | Fair | Yes | Retain | - | On slope, Bulge at Trunk, Root Flare was Partially Buried Climber |
| | | R004 | Aquilaria sinensis | 土沉香 | 10 | 150 | 3 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope |
| | | R005 | Aquilaria sinensis | 土沉香 | 8 | 130 | 3 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope |
| | | R006 | Aquilaria sinensis | 土沉香 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | | R007 | Gmelina chinensis | 石梓 | 10 | 170 | 5 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Branches with Included Bark, Crossed Branches, Old termite tracks on trunk |
| | G02/29 | R013 | Gmelina chinensis | | 8 | 150 | 7 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Branches, Epicormics at Branch, Broken Leader with Epiphyte |
| 60507694/C2/1732 | | R014 | Gmelina chinensis | | 7 | 160 | 5 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Branches |
| | | R015 | Gmelina chinensis | 石梓 | 6 | 110 | 2 | Good | Poor | Poor | Fair | Yes | Retain | - | On slope, Broken Leader, Epiphytes |
| | G03/44 | R016 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | | R017 | Gmelina chinensis | 石梓 | 8 | 130 | 4 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Broken Leader with Epicormics |
| | G04/45 | R010 | Gmelina chinensis | 石梓 | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | | R011 | Gmelina chinensis | 石梓 | 8 | 140 | 7 | Good | Poor | Fair | Fair | Yes | Retain | - | On slope, Co-dominant Branches |
| | | R012 | Gmelina chinensis | | - | - | - | - | - | - | - | Yes | Retain | - | Missing |
| | G05/67 | R008 | Gmelina chinensis | 石梓 | 6 | 120 | 4 | Good | Fair | Fair | Fair | Yes | Retain | - | On slope |
| | G06/66 | R009 | Gmelina chinensis | | 7 | 120 | 5 | Good | Poor | Fair | Fair | Yes | Retain | _ | On slope, Epicormic at Broken Stump |



ANNEX H2

TRANSPLANTED PLANT SPECIES OF CONSERVATION IMPORTANCE

Tung Chung New Town Extension—Salt Water Supply System
Monthly Monitoring Report for the 3 Nos. Replacement Planting Aquilaria sinensis (July 2024)

Ref.: C3113/24/TGD3996 Date: 7 August 2024



RP01-A



RP01-B

Tung Chung New Town Extension—Salt Water Supply System
Monthly Monitoring Report for the 3 Nos. Replacement Planting Aquilaria sinensis (July 2024)

Ref.: C3113/24/TGD3996 Date: 7 August 2024



RP02-A



RP02-B

Tung Chung New Town Extension—Salt Water Supply System Monthly Monitoring Report for the 3 Nos. Replacement Planting Aquilaria sinensis (July 2024)

Ref.: C3113/24/TGD3996 Date: 7 August 2024



RP04-A



RP04-B

Contract No. NL/2020/02 Tung Chung New Town Extension --Salt Water Supply System Monthly Monitoring Report for the 3 Nos. Replacement Planting *Aquilaria sinensis* (July 2024)

| Tree No. | Botanical Name | Chinese Name | | | | Amenity Value | Form | Health | Structural Condition | Conservation Status | Recommendation in Detailed Preservation and/or Translocation Plan for Plant Species of Conservation Importance for Tung Chung | | Remarks |
|----------|--------------------|--------------|------------|-------------|---------------|------------------|----------|------------|-------------------------|---------------------|---|---|----------------------|
| | | | Height (m) | DBH (mm) | Spread (m) | | (Good/ F | air/ Poor) | | | East (Retain/ Transplant/ Fell) | | |
| RP01 | Aquilaria sinensis | 土沉香 | 4.5 | 79 | 2.5 | Good | Fair | Fair | Fair | Yes | Retain | - | Replacement Planting |
| RP02 | Aquilaria sinensis | 土沉香 | 4.5 | 75 | 2.5 | Good | Fair | Fair | Fair | Yes | Retain | - | Replacement Planting |
| RP04 | Aquilaria sinensis | 土沉香 | 4 | 81 | 2 | Good | Fair | Fair | Fair | Yes | Retain | - | Replacement Planting |

Ref.: C3113/24/TGD3996

Date: 7 August 2024



ANNEX I ECO-SHORELINE MONITORING

Photographic Records for Mangrove, Vertical and Rocky Eco-shoreline in July 2024



General View of Mangrove Eco-shoreline at Upper Terrace



General View of Rocky Eco-shoreline



General View of Mangrove Eco-shoreline at Lower Terrace

General View of Vertical Eco-shoreline



ANNEX J LANDSCAPE AND VISUAL MONITORING



ANNEX J1

EXAMPLES OF LANDSCAPE AND VISUAL MITIGATION MEASURES



Photo 1 – Tree protection zone for preserved plant species of conservation importance



Photo 2 – General view of compensation woodland



Photo 3 – Erection of site hoardings in unobtrusive colours



Photo 4 - Natural Rock Material/Planting for Artificial Seawall



Photo 5 – Orientation of night time lighting to minimize glare impact



ANNEX J2

EVENT AND ACTION PLAN FOR LANDSCAPE AND VISUAL MITIGATION MEASURES

Annex J2 Event and Action Plan for Landscape and Visual

| Event | Action | | | | | | | | |
|--------------------------------|--|---|---|--|--|--|--|--|--|
| Event | ET | IEC | ER | Contractor | | | | | |
| Design Check | 1. Check final design conforms to the requirements of EP and prepare report. | Check report. Recommend remedial design if necessary. | Undertake remedial design if necessary. | | | | | | |
| Non-conformity on one occasion | Inform the IEC, ER and the Contractor Discuss remedial actions with IEC, ER and Contractor Monitor remedial actions until rectification has been completed | Check report. Check Contractor's working method Discuss with ET, ER and Contractor on possible remedial measures. Advise ER on effective of proposed remedial measures. Check implementation of remedial measures | Confirm receipt of notification of non-conformity in writing Review and agree on the remedial measures proposed by the Contractor Ensure remedial measures are properly implemented | Identify source and investigate the non-conformity Amend working methods agreed with ER as appropriate Rectify damage and undertake any necessary replacement | | | | | |
| Repeated Non-conformity | Identify sources Inform the Contractor, IEC and ER Discuss inspection frequency Discuss remedial actions with IEC, ER and Contractor Monitor remedial actions until rectification has been completed If non-conformity stops, cease additional monitoring | Check inspection report Check Contractor's working method Discuss with ET, ER and Contractor on possible remedial measures Advise ER on effectiveness of proposed remedial measures | Notify the Contractor In consultation with the ET and IEC, agree with the Contractor on the remedial measures to be implemented Supervise implementation of remedial measures | Identify source and investigate the non-conformity Amend working methods agreed with ER as appropriate Rectify damage and undertake any necessary replacement. Stop relevant portion of works as determined by ER until the non- conformity is abated. | | | | | |

ENVIRONMENTAL RESOURCES MANAGEMENT

CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT



ANNEX K

CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS

Table K1 Cumulative Statistics on Exceedances

| | | Total No. recorded in this reporting period | Total No. recorded since project commencement |
|------------------------|--------|---|---|
| Air Quality (1-hr TSP) | Action | 0 | 0 |
| | Limit | 0 | 0 |
| Noise | Action | 0 | 81 |
| | Limit | 0 | 0 |
| Water Quality | Action | 0 | 0 |
| - | Limit | 0 | 0 |
| Marine Ecology | Action | 0 | 0 |
| | Limit | 0 | 0 |

Remark:

Table K2 Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions

| Contract No. | Reporting Period | | Cumulative Statistics | S |
|--------------|--|------------|-----------------------|--------------|
| | _ | Complaints | Notifications of | Prosecutions |
| | | | Summons | |
| Contract 1 | This Reporting Period (1 – 31 July 2024) | 0 | 0 | 0 |
| | Total no. received since project commencement | 111 | 0 | 0 |
| Contract 2 | This Reporting Period (1 – 31 July 2024) | 0 | 0 | 0 |
| | Total no. received since project commencement | 3 | 0 | 0 |
| Contract 3 | This Reporting Period (1 – 31 July 2024) | 1 | 0 | 0 |
| | Total no. received since project commencement | 65 | 0 | 0 |
| Contract 7 | This Reporting Period (1 - 31 July 2024) | 0 | 0 | 0 |
| | Total no. received since project commencement | 0 | 0 | 0 |

⁽¹⁾ Exceedances, which are not project related, are not shown in this table.



ANNEX L

MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD

Tung Chung New Town Extension (East)

Air Quality and Noise Monitoring Schedule (August 2024)

| Sunday | | | Wednesday | | Friday | Saturday |
|--------|--------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | | | | 01-Aug | 02-Aug | 03-Aug |
| | | | | | | Air Quality and Noise Monitoring |
| 04-Aug | 05-Aug | 06-Aug | 07-Aug | 08-Aug | 09-Aug | 10-Aug |
| | | | | | Air Quality and Noise Monitoring | |
| 11-Aug | 12-Aug | 13-Aug | 14-Aug | 15-Aug | 16-Aug | 17-Aug |
| | | | | Air Quality and Noise Monitoring | | |
| 18-Aug | 19-Aug | 20-Aug | 21-Aug | 22-Aug | 23-Aug | 24-Aug |
| | | | Air Quality and Noise Monitoring | | | |
| 25-Aug | 26-Aug | 27-Aug | 28-Aug | 29-Aug | 30-Aug | 31-Aug |
| | | Air Quality and Noise Monitoring | | | | |



ERM HAS OVER 160 OFFICES ACROSS THE FOLLOWING COUNTRIES AND TERRITORIES WORLDWIDE

Argentina The Netherlands

Australia New Zealand

Belgium Peru

Brazil Poland

Canada Portugal

China Puerto Rico

Colombia Romania

France Senegal

Germany Singapore

Ghana South Africa

Guyana South Korea

Hong Kong Spain

India Switzerland

Indonesia Taiwan

Ireland Tanzania

Italy Thailand

Japan UAE

Kazakhstan UK

Kenya US

Malaysia Vietnam

Mexico

Mozambique

ERM

2507 One Harbourfront 18 Tak Fung Street Hunghom, Kowloon

Hong Kong

T: +852 22713000 F: +852 3015 8052

www.erm.com



